



SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

CAT. No. E1001G

INDEX		
PRODUCT SEARCH	SERIES TABLE	➔
	GROUP CHART	➔
PRODUCTION GUIDE	PRECAUTIONS AND GUIDELINES (Aluminum Electrolytic Capacitor)	➔
	PART NUMBERING SYSTEM	➔
	ENVIRONMENTAL CONSIDERATION	➔
	PACKAGING	➔
	TAPING SPECIFICATIONS	➔
	RECOMMENDED REFLOW CONDITION	➔
	STANDARDIZATION	➔
	WORLD-WIDE MANUFACTURING LOCATIONS	➔
PRODUCT SPECIFICATIONS	CHIP TYPE	➔
RELIABILITY DATA		➔
APPENDIX (GLOBAL CODE)		➔

Series		Features	Endurance (+R=With ripple)	Standard type	Low impedance	Solvent-proof	Terminal type	Rated voltage range (Vdc)	Capacitance range (μF)	
Conductive Polymer Electrolyte Type	PXF <small>(NEW!)</small>	Vertical type, super low ESR	105°C 2,000 hours		●	●	SMD	2.5 to 6.3	220 to 1,000	
	PXE <small>(Upgrade!)</small>	Vertical type, super low ESR	105°C 2,000 hours		●	●	SMD	2.5 to 16	33 to 2,700	
	PXA <small>(Upgrade!)</small>	Vertical type, super low ESR	105°C 1,000 to 2,000 hours	●	●	●	SMD	2.5 to 25	3.3 to 1,500	
	PXH	125°C Vertical type	125°C 1,000 hours		●	●	SMD	2.5 to 20	22 to 1,000	
	PSC <small>(Upgrade!)</small>	Radial lead type, super low ESR, high ripple current	105°C 2,000 hours		●	●	Radial	2.5 to 16	270 to 2,700	
	PSA	Super low ESR, high ripple current	105°C 2,000 hours		●	●	Radial	2.5 to 16	47 to 1,000	
	PS <small>(Upgrade!)</small>	Radial lead type, super low ESR	105°C 2,000 hours	●	●	●	Radial	2.5 to 35	18 to 1,500	
Surface Mount	Vertical Type	MVS	4.5mm height	85°C 2,000 hours	●	●	SMD	4 to 50	0.1 to 220	
		MVA	5.5 to 22.0mm max. height, downsized	85°C 2,000 hours			▲	SMD	4 to 450	0.1 to 10,000
		MV	5.5 to 10.5mm max. height	85°C 1,000 to 2,000 hours	●	●	●	SMD	4 to 63	0.1 to 1,000
		MVE	5.5 to 22.0mm max. height, downsized	105°C 1,000 to 2,000 hours			▲	SMD	6.3 to 450	0.47 to 6,800
		MVK	5.5 to 10.5mm max. height	105°C 1,000 to 2,000 hours	●	●	●	SMD	6.3 to 50	0.1 to 1,000
		MKA	5.5 to 10.5mm max. height	105°C 1,000 to 2,000 hours			●	SMD	6.3 to 50	0.1 to 1,000
		MZA	6.1 to 10.5mm max. height, very low impedance	105°C 2,000 hours		●	●	SMD	6.3 to 80	3.3 to 1,500
		MVY	5.5 to 22.0mm max. height	105°C 1,000 to 5,000 hours		●	▲	SMD	6.3 to 100	1.0 to 8,200
		MZD <small>(NEW!)</small>	105°C 5,000 hours, low impedance, long life	105°C 5,000 hours		●	●	SMD	6.3 to 50	10 to 470
		MLA	Low impedance, long life	105°C 3,000 hours		●	●	SMD	6.3 to 50	10 to 1,000
		MVJ	6.0mm max. height	105°C 2,000 hours			●	SMD	6.3 to 50	0.1 to 100
		MLD <small>(NEW!)</small>	105°C 5,000 hours, long life	105°C 5,000 hours			●	SMD	6.3 to 50	0.1 to 1,000
		MVL	6.0 to 10.5mm max. height	105°C 3,000 to 5,000 hours			●	SMD	6.3 to 50	0.1 to 1,000
		MVH	6.0 to 22.0mm max. height	125°C 1,000 to 5,000 hours			▲	SMD	10 to 450	3.3 to 4,700
		MHB <small>(NEW!)</small>	10.5mm max. height (Ask Engineering No767 in detail)	125°C 2,000 hours			●	SMD	10 to 35	47 to 470
		MKB <small>(NEW!)</small>	10.5mm max. height	105°C 3,000 hours			●	SMD	400	2.2 to 4.7
		MV-BP	5.5mm max. height, bi-polar	85°C 2,000 hours			●	SMD	4 to 50	0.1 to 47
MVK-BP	6.0mm max. height, bi-polar	105°C 1,000 hours			●	SMD	6.3 to 50	0.1 to 47		
Miniature	Low Profile	SRM	5mm height, downsized	85°C 1,000 hours		●	Radial	4 to 50	0.1 to 330	
		SRE	5mm height	85°C 1,000 hours	●		Radial	4 to 50	0.1 to 100	
		KRE	5mm height	105°C 1,000 hours	●	●	Radial	6.3 to 50	0.1 to 100	
		SRA	7mm height	85°C 1,000 hours	●		Radial	4 to 63	0.1 to 470	
		KMA	7mm height	105°C 1,000 hours	●	●	Radial	4 to 63	0.1 to 220	
		SRG	φ4×7 to φ18×25mm, low profile	85°C 1,000 to 2,000 hours			●	Radial	4 to 50	0.1 to 10,000
		KRG	φ4×7 to φ18×25mm, low profile	105°C 1,000 hours			●	Radial	6.3 to 50	0.1 to 10,000
	General Purpose	SMQ	Downsized	85°C 2,000 hours	●		Radial	6.3 to 450	0.1 to 47,000	
		KMQ	Downsized	105°C 1,000 to 2,000 hours +R	●	▲	Radial	6.3 to 450	0.1 to 47,000	
		SMG	General, downsized	85°C 2,000 hours	●	▲	Radial	6.3 to 450	0.1 to 39,000	
		KMG	General, downsized	105°C 1,000 to 2,000 hours +R	●	▲	Radial	6.3 to 450	0.1 to 22,000	
		SME	General (Ask Engineering Bulletin No511 in detail)	85°C 2,000 hours			▲	Radial	6.3 to 450	0.1 to 15,000
		KME	General (Ask Engineering Bulletin No512 in detail)	105°C 1,000 hours +R			▲	Radial	6.3 to 400	0.1 to 15,000
		SME-BP	Bi-polar, general	85°C 2,000 hours	●	●	Radial	6.3 to 100	0.47 to 6,800	
	KME-BP	Bi-polar, general	105°C 1,000 hours	●	●	Radial	6.3 to 100	0.47 to 6,800		
	High Frequency Use	KZM	Lowest impedance, long life	105°C 6,000 to 10,000 hours +R	●		Radial	6.3 to 50	27 to 10,000	
		KZH	Lowest impedance, long life	105°C 5,000 to 6,000 hours +R	●		Radial	6.3 to 35	47 to 8,200	
KZE		Lowest impedance, long life	105°C 1,000 to 5,000 hours +R	●		Radial	6.3 to 100	6.8 to 6,800		
KY		Low impedance, long life	105°C 4,000 to 10,000 hours +R	●		Radial	6.3 to 100	0.47 to 18,000		
LXZ		Low impedance, downsized	105°C 2,000 to 8,000 hours +R	●	●	Radial	6.3 to 63	12 to 18,000		
LXY		Low impedance, high reliability	105°C 2,000 to 8,000 hours +R	●	●	Radial	10 to 63	10 to 8,200		
LXV		Low impedance	105°C 2,000 to 5,000 hours +R		●	●	Radial	6.3 to 100	5.6 to 15,000	
KMF	Low impedance, high CV, general (Ask Engineering Bulletin No630 in detail)	105°C 2,000 hours +R		●		Radial	160 to 450	2.2 to 220		

■ : Promotional products

▲ : Some of range are solvent-proof.


Series		Features	Endurance (+R=With ripple)	Standard type	Low impedance	Solvent-proof	Terminal type	Rated voltage range (Vdc)	Capacitance range (μ F)
Miniature	High Reliability	KXJ <i>(Upgrade!)</i>	Downsized, long life, for input filtering	105°C 10,000 to 12,000 hours +R	●		Radial	160 to 450	6.8 to 680
		KXG	Downsized, long life, for input filtering	105°C 8,000 to 10,000 hours +R	●		Radial	160 to 450	6.8 to 330
		KMX	Long life, for input filtering <small>(Ask Engineering Bulletin No 646 in detail)</small>	105°C 8,000 to 10,000 hours +R	●		Radial	160 to 450	3.3 to 680
		SMH	$\phi 20 \times 20$ to $\phi 22 \times 50$ mm	85°C 2,000 hours +R	●		Radial	160 to 450	33 to 470
		KMH	$\phi 20 \times 20$ to $\phi 22 \times 50$ mm	105°C 2,000 hours +R	●		Radial	160 to 450	33 to 470
		PAG	Low profile, for input filtering	105°C 2,000 hours +R			Radial	200 to 450	18 to 560
		KLJ	Downsized, no sparks with DC overvoltage	105°C 2,000 hours +R			Radial	200 & 400	4.7 to 330
		KLG	No sparks with DC overvoltage	105°C 2,000 hours +R			Radial	200 & 400	22 to 330
		FL	Long life	105°C 3,000 hours +R		●	Radial	6.3 to 50	0.47 to 270
		GPA	125°C, downsized, low impedance	125°C 3,000 to 5,000 hours +R	●	●	Radial	25 to 50	470 to 6,800
		GXE	125°C, downsize, low impedance	125°C 2,000 to 5,000 hours +R	●	▲	Radial	10 to 450	4.7 to 4,700
		GXL	125°C Long life	125°C 5,000/10,000 hours +R		●	Radial	10 to 50	100 to 4,700
		GHA <i>(NEW!)</i>	150°C	150°C 1,000 hours		●	Radial	10 to 35	68 to 3,300
	Special Application	LBG	For airbag	105°C 5,000 hours +R	●	●	Radial	25 & 35	1,000 to 11,000
		KZV <i>(NEW!)</i>	For PC motherboard <small>(Ask Engineering Bulletin No756 in detail)</small>	105°C 2,000 hours +R	●		Radial	4	820 to 2,700
		KZJ	For PC motherboard	105°C 2,000 hours +R	●		Radial	6.3 to 16	470 to 3,300
		KZG	For PC motherboard	105°C 2,000 hours +R	●		Radial	6.3 to 16	470 to 3,300
		LLA	Low DC leakage, general	85°C 1,000 hours		●	Radial	6.3 to 50	0.1 to 15,000
		PH	For photo flash	55°C 5,000 times charging			Radial	300 & 330	—
	Large Sized	General Purpose	KMR	105°C, Snap-in terminal, super downsized	105°C 2,000 hours +R	●		Pin	160 to 450
SMQ			Snap-in terminal, more downsized	85°C 2,000 hours +R	●		Pin	160 to 450	82 to 3,900
KMQ			Snap-in terminal, more downsized	105°C 2,000 hours +R	●		Pin	35, 50, 160 to 450	68 to 33,000
SMM			Snap-in terminal, downsized	85°C 3,000 hours +R	●		Pin	160 to 450	47 to 3,300
KMS <i>(NEW!)</i>			Snap-in terminal, downsized	105°C 3,000 hours +R	●		Pin	160 to 450	82 to 3,300
KMM			Snap-in terminal, downsized	105°C 2,000 to 3,000 hours +R	●		Pin	160 to 450	39 to 3,300
SMH			Snap-in terminal, general <small>(Refer Engineering Bulletin No585 for 160 to 450V)</small>	85°C 2,000 hours +R	●		Pin	6.3 to 100	820 to 100,000
KMH			Snap-in terminal, general <small>(Refer Engineering Bulletin No584 for 160 to 450V)</small>	105°C 2,000 hours +R	●		Pin	6.3 to 100	560 to 82,000
Low Profile		SLM	15mm height	85°C 2,000 hours +R			Pin	160 to 400	47 to 560
		KLM	15mm height	105°C 2,000 hours +R			Pin	160 to 400	39 to 390
High Reliability		LXM	Long life	105°C 7,000 hours +R			Pin	160 to 450	47 to 2,200
		LXS <i>(NEW!)</i>	Snap-in terminal downsized	105°C 5,000 hours +R	●		Pin	160 to 450	82 to 3,300
		LXQ	Long life, downsized	105°C 5,000 hours +R			Pin	160 to 450	82 to 2,700
		LXG	Long life	105°C 5,000 hours +R			Pin	10 to 100	390 to 47,000
		CHA <i>(Upgrade!)</i>	No sparks with DC overvoltage, downsized	105°C 2,000 hours +R			Pin	200 to 450	56 to 1,200
		LXH	No sparks with DC overvoltage	105°C 3,000/5,000 hours +R			Pin	200 & 400	68 to 1,500
	RWE-LR	For air-conditioning <small>(Ask Engineering Bulletin No768 in detail)</small>	85°C 3,000 hours +R			Lug	250 to 450	330 to 2,200	
Screw-mount Terminal Type	General Purpose	SME	Screw terminal, general	85°C 2,000 hours +R	●		Screw	10 to 250	560 to 680,000
		KMH	Screw terminal, general	105°C 2,000 hours +R	●		Screw	10 to 400	180 to 680,000
	For Inverter	RWG	85°C, high ripple, downsized, long life	85°C 5,000 hours +R			Screw	350 to 450	1,500 to 18,000
		RWF	High ripple, long life	85°C 5,000 hours +R			Screw	350 to 450	820 to 22,000
		RWE	High ripple	85°C 2,000 hours +R	●		Screw	350 to 550	100 to 12,000
		RWY	High ripple, long life, low cost	85°C 5,000 hours +R			Screw	350 to 450	500 to 14,000
		RWL	High ripple, long life	85°C 20,000 hours +R			Screw	350 to 450	2,200 to 12,000
		FTP	Ellips can shape, high ripple	85°C 5,000 hours +R			Screw	63 to 450	270 to 21,000
		LXA	Long life	105°C 2,000/5,000 hours +R			Screw	10 to 525	330 to 390,000
		LXR	High ripple, long life	105°C 5,000 hours +R			Screw	350 to 450	2,200 to 15,000
		LWY	Low cost (Ask Engineering Bulletin No714 in detail)	105°C 5,000 hours +R			Screw	350 to 450	460 to 13,000
		KW	Low impedance (Ask Engineering Bulletin in detail)	105°C 2,000 hours		●	Screw	10 to 100	1,000 to 100,000

■ : Promotional products


▲ : Some of range are solvent-proof.

CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS

◆SURFACE MOUNT

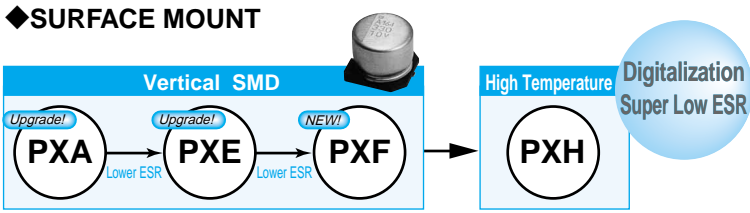


◆RADIAL LEAD

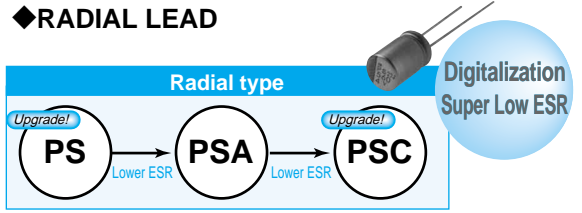


ALUMINUM ELECTROLYTIC CAPACITORS

◆SURFACE MOUNT

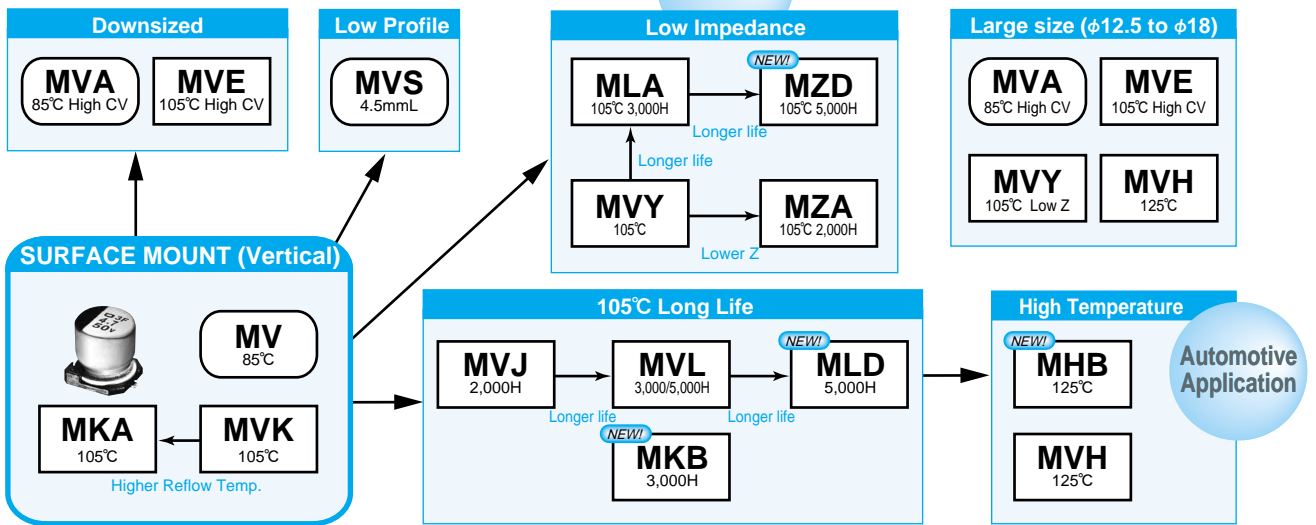


◆RADIAL LEAD

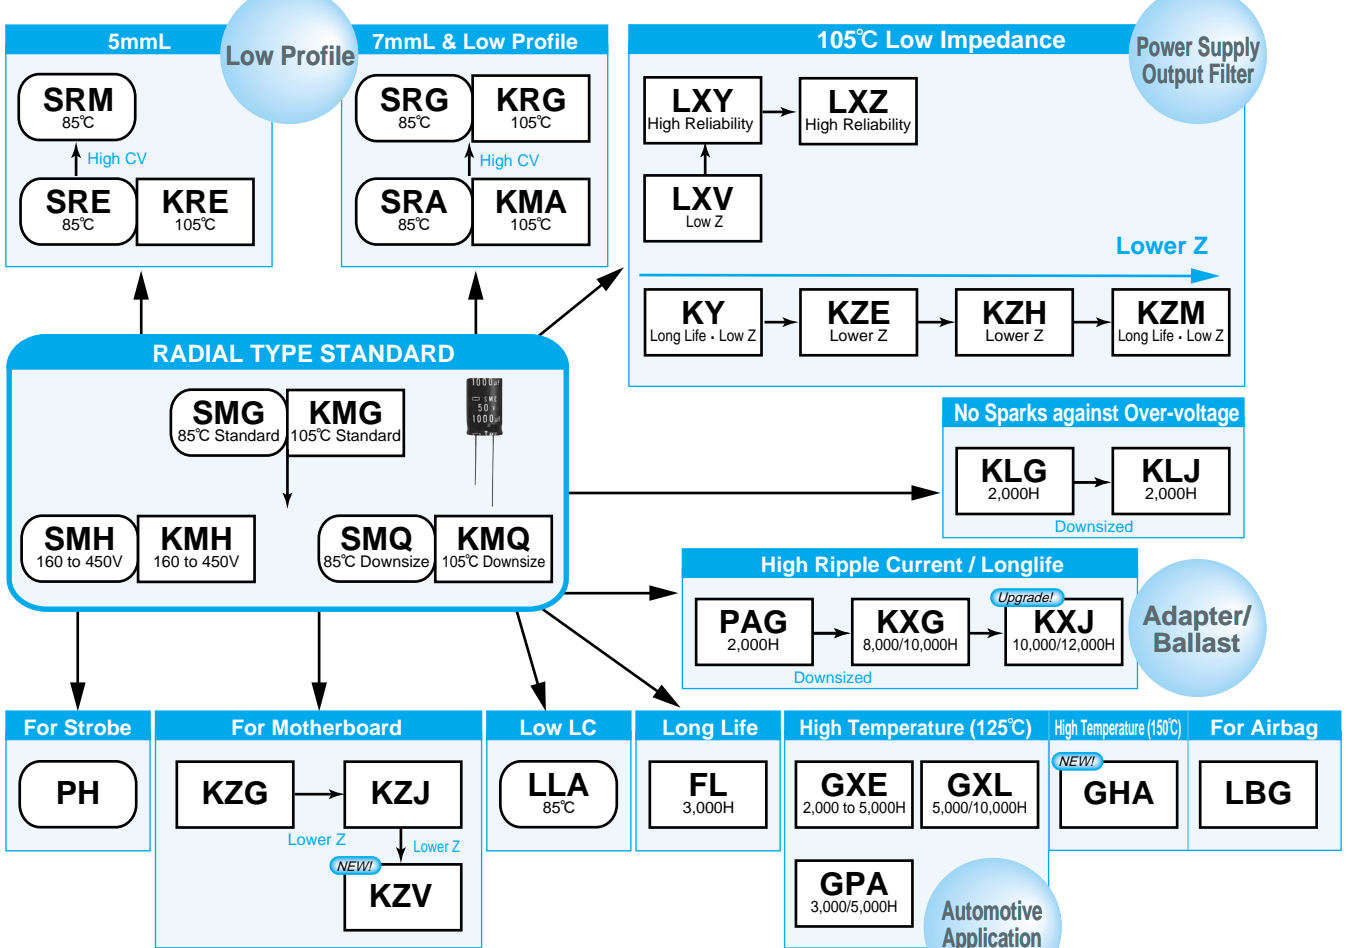


ALUMINUM ELECTROLYTIC CAPACITORS

◆SNAP-IN

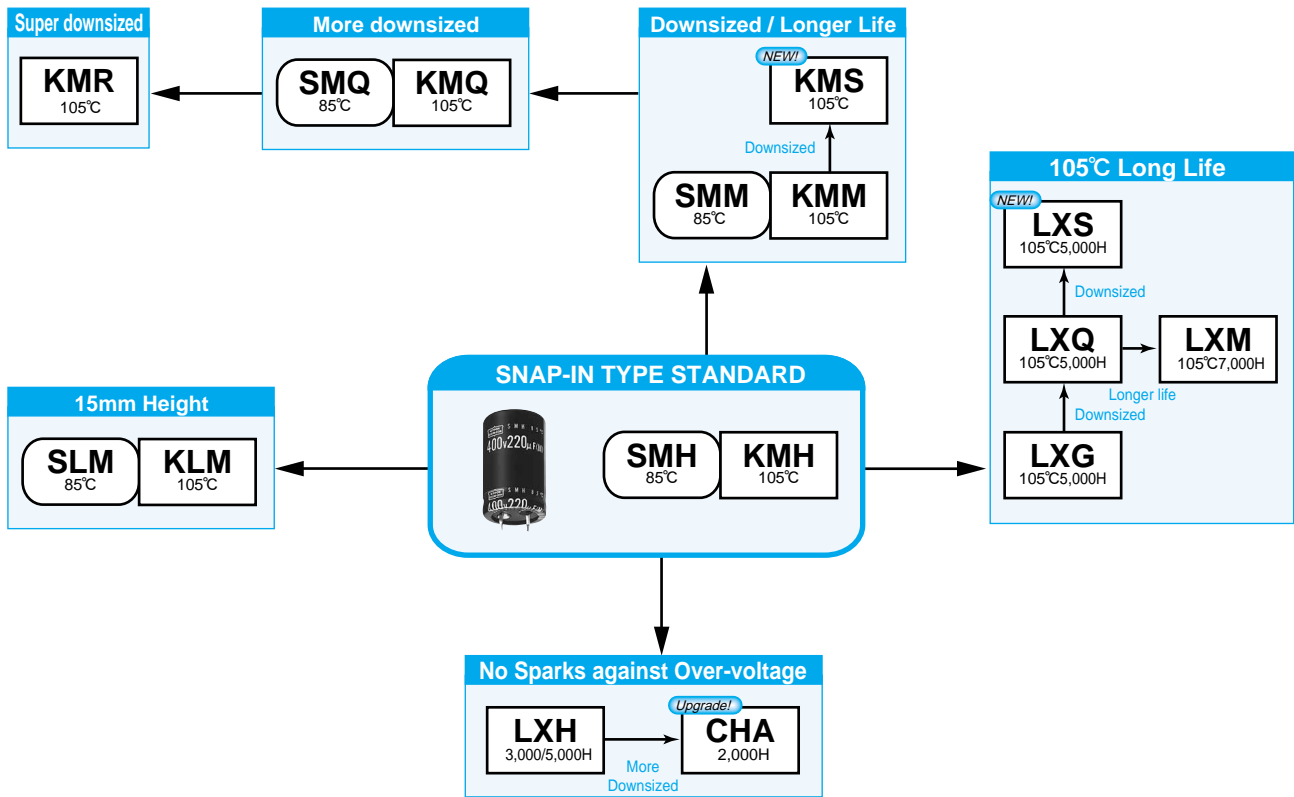

◆SCREW-MOUNT TERMINAL

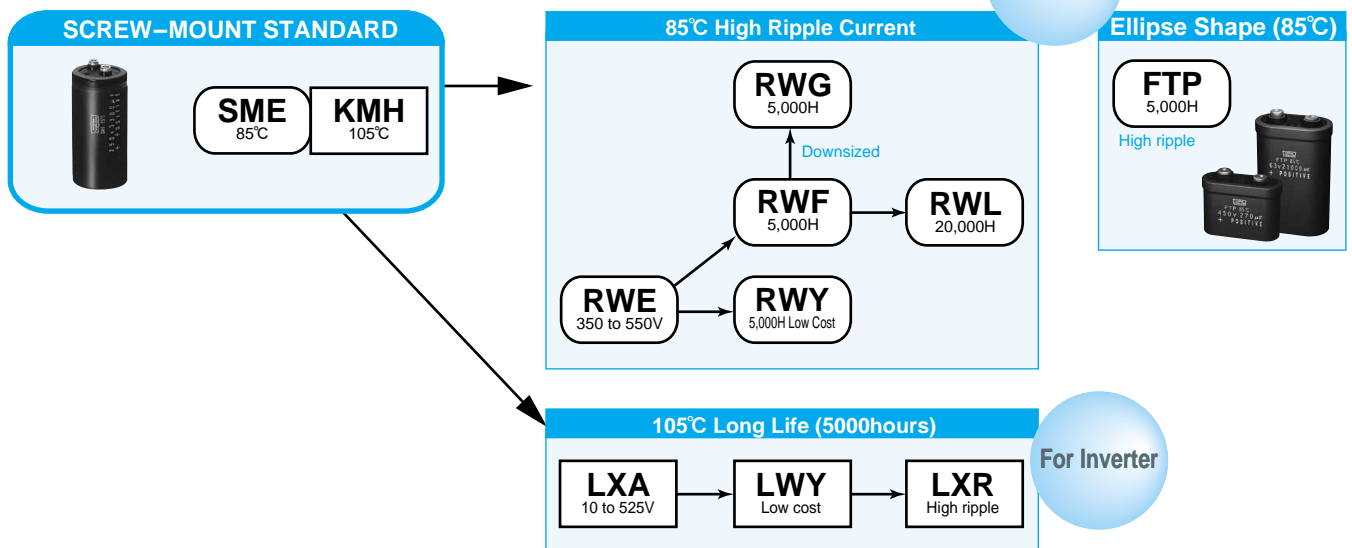



PRECAUTIONS AND GUIDELINES

For conductive polymer aluminum electrolytic solid capacitors, please refer to PRECAUTIONS AND GUIDELINES (Conductive Polymer)

Designing Device Circuits

1 Select the capacitors to suit installation and operating conditions, and use the capacitors to meet the performance limits prescribed in this catalog or the product specifications.

2 Polarity

Aluminum Electrolytic Capacitors are polarized. Apply neither reverse voltage nor AC voltage to polarized capacitors. Using reversed polarity causes a short circuit or venting. Before use, refer to the catalog, product specifications or capacitor body to identify the polarity marking. (The shape of rubber seal does not represent the directional rule for polarity.) Use a bi-polar type of non-solid aluminum electrolytic capacitor for a circuit where the polarity is occasionally reversed. However, note that even a bi-polar aluminum electrolytic capacitor must not be used for AC voltage applications.

3 Operating voltage

Do not apply a DC voltage which exceeds the full rated voltage. The peak voltage of a superimposed AC voltage (ripple voltage) on the DC voltage must not exceed the full rated voltage. A surge voltage value, which exceeds the full rated voltage, is prescribed in the catalogs, but it is a restricted condition, for especially short periods of time.

4 Ripple current

The rated ripple current has been specified at a certain ripple frequency. The rated ripple current at several frequencies must be calculated by multiplying the rated ripple current at the original frequency using the frequency multipliers for each product series. For more details, refer to the paragraph of Life of Aluminum Electrolytic Capacitors.

5 Category temperature

The use of a capacitor outside the maximum rated category temperature will considerably shorten the life or cause the capacitor to vent.

The relation between the lifetime of aluminum electrolytic capacitors and ambient temperature follows Arrhenius' rule that the lifetime is approximately halved with each 10°C rise in ambient temperature.

6 Life expectancy

Select the capacitors to meet the service life of a device.

7 Charge and discharge

Do not use capacitors in circuits where heavy charge and discharge cycles are frequently repeated. Frequent and sharp heavy discharging cycles will result in decreasing capacitance and damage to the capacitors due to generated heat. Specified capacitors can be designed to meet the requirements of charging-discharging cycles, frequency, operating temperature, etc.

8 Failure mode of capacitors

Non-solid aluminum electrolytic capacitors, in general, have a lifetime which ends in an open circuit, the period is dependent upon temperature. Consequently, lifetime of capacitors can be extended by reducing the ambient temperature and/or ripple current.

9 Insulating

a) Electrically isolate the following parts of a capacitor from the negative terminal, the positive terminal and the circuit traces.

- The outer can case of a non-solid aluminum capacitor.
- The dummy terminal of a non-solid aluminum capacitor, which is designed for mounting stability.

b) The outer sleeve of a capacitor is not assured as an insulator (Except for screw type). For applications that require an insulated outer sleeve, a custom-design capacitor is recommended to.

10 Condition

Do not use/expose capacitors to the following conditions.

- Oil, water, salty water take care to avoid storage in damp locations.
- Direct sunlight
- Toxic gases such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine or its compounds, and ammonium
- Ozone, ultraviolet rays or radiation
- Severe vibration or mechanical shock conditions beyond the limits prescribed in the catalogs or the product specification.

11 Mounting

a) The paper separators and the electrolytic-conductive electrolytes in a non-solid aluminum electrolytic capacitor are flammable.

Leaking electrolyte on a printed circuit board can gradually erode the copper traces, possibly causing smoke or burning by short-circuiting the copper traces.

Verify the following points when designing a PC board.

- Provide the appropriate hole spacing on the PC board to match the terminal spacing of the capacitor.
- Make the following open space over the vent so that the vent can operate correctly.

Case diameter	Clearance
φ6.3 to φ16mm	2mm minimum
φ18 to φ35mm	3mm minimum
φ40mm and up	5mm minimum

- Do not place any wires or copper traces over the vent of the capacitor.
- Installing a capacitor with the vent facing the PC board needs an appropriate ventilation hole in PC board.
- Do not pass any copper traces beneath the seal side of a capacitor. The trace must pass 1 or 2mm to the side of the capacitor.
- Avoid placing any heat-generating objects adjacent to a capacitor or even on the reverse side of the PC board.
- Do not pass any via holes or underneath a capacitor.
- In designing double-sided PC boards, do not locate any copper trace under the seal side of a capacitor.

b) Do not mount the terminal side of a screw mount capacitor downwards. If a screw terminal capacitor is mounted on its side, make sure the positive terminal is higher than the negative terminal.

Do not fasten the screws of the terminals and the mounting clamps over the specified torque prescribed in the catalog or the production specification.

c) For a surface mount capacitor, design the copper pads of the PC board in accordance with the catalog or the product specifications.

12 Others

- The electrical characteristics of capacitors vary in respect to temperature, frequency and service life. Design the device circuits by taking these changes into account.
- Capacitors mounted in parallel need the current to flow equally through the individual capacitors.
- Capacitors mounted in series require resistors in parallel with the individual capacitors to balance the voltage.
- Using capacitor for applications which always consider safety. Consult with our factory before use in applications which can affect human life.(space equipment, aerial equipment, nuclear equipment, medical equipment, vehicle control equipment, etc) Please note that the product, which is

designed only for specific usage can not be used in other usages.(ex. Photo flash type, etc.)

Installing Capacitors

1 Installing

- a) Used capacitors are not reusable, except in the case that the capacitors are detached from a device for periodic inspection to measure their electrical characteristics.
 - b) If the capacitors have self charged, discharge in the capacitors through a resistor of approximately 1kΩ before use.
 - c) If capacitors are stored at a temperature of 35°C or more and more than 75%RH, the leakage current may increase. In this case, they can be reformed by applying the rated voltage through a resistor of approximately 1kΩ.
 - d) Verify the rated capacitance and voltages of the capacitors when installing.
 - e) Verify the polarity of the capacitors.
 - f) Do not use the capacitors if they have been dropped on the floor.
 - g) Do not deform the cases of capacitors.
 - h) Verify that the lead spacing of the capacitor fits the hole spacing in the PC board before installing the capacitors. Some standard pre-formed leads are available.
 - i) For pin terminals or snap-in terminals, insert the terminals into PC board and press the capacitor downward until the bottom of the capacitor body reaches PC board surface.
 - j) Do not apply any mechanical force in excess of the limits prescribed in the catalogs or the product specifications of the capacitors.
- Also, note the capacitors may be damaged by mechanical shocks caused by the vacuum/insertion head, component checker or centering operation of an automatic mounting or insertion machine.

2 Soldering and Solderability

- a) When soldering with a soldering iron
 - Soldering conditions (temperature and time) should be within the limits prescribed in the catalogs or the product specifications.
 - If the terminal spacing of a capacitor does not fit the terminal hole spacing of the PC board, reform the terminals in a manner to minimize a mechanical stress into the body of the capacitor.
 - Remove the capacitors from the PC board, after the solder is completely melted, reworking by using a soldering iron minimizes the mechanical stress to the capacitors.
 - Do not touch the capacitor body with the hot tip of the soldering iron.
- b) Flow soldering
 - Do not dip the body of a capacitor into the solder bath only dip the terminals in. The soldering must be done on the reverse side of PC board.
 - Soldering conditions (preheat, solder temperature and dipping time) should be within the limits prescribed in the catalogs or the product specifications.
 - Do not apply flux to any part of capacitors other than their terminals.
 - Make sure the capacitors do not come into contact with any other components while soldering.
- c) Reflow soldering
 - Soldering conditions (preheat, solder temperature and dipping time) should be within the limits prescribed in the catalogs or the product specifications.
 - When setting the temperature infrared heaters, consider that the infrared absorption causes material to be discolored and change in appearance.
 - Do not solder capacitors more than once using reflow. If you need to twice, be sure to consult us.

- Make sure capacitors do not come into contact with copper traces.
- d) Do not re-use surface mount capacitors which have already been soldered.
In addition, when installing a new capacitor onto the assembly board to rework, remove old residual flux from the surface of the PC board, and then use a soldering iron within the prescribed conditions.
- e) Confirm before running into soldering that the capacitors are for reflow soldering.

3 Handling after soldering

Do not apply any mechanical stress to the capacitor after soldering onto the PC board.

- a) Do not lean or twist the body of the capacitor after soldering the capacitors onto the PC board.
- b) Do not use the capacitors for lifting or carrying the assembly board.
- c) Do not hit or poke the capacitor after soldering to PC board.
When stacking the assembly board, be careful that other components do not touch the aluminum electrolytic capacitors.
- d) Do not drop the assembly board.

4 Cleaning PC board

- a) Do not wash capacitors by using the following cleaning agents.
 - Halogenated solvents; cause capacitors to fail due to corrosion.
 - Alkali system solvents; corrode (dissolve) an aluminum case.
 - Petroleum system solvents; cause the rubber seal material to deteriorate.
 - Xylene; causes the rubber seal material to deteriorate.
 - Acetone; erases the marking.

Solvent-proof capacitors are only suitable for washing using the cleaning conditions prescribed in the catalogs or the product specifications. In particular, ultrasonic cleaning will accelerate damaging capacitors.
- b) Verify the following points when washing capacitors.
 - Monitor conductivity, pH, specific gravity, and the water content of cleaning agents. Contamination adversely affects these characteristics.
 - Be sure not to expose the capacitors under solvent rich conditions or keep capacitors inside a closed container. In addition, please dry the solvent sufficiently on the PC board and the capacitor with an air knife (temperature should be less than the maximum rated category temperature of the capacitor) over 10 minutes.
Aluminum electrolytic capacitors can be characteristically and catastrophically damaged by halogen ions, particularly by chlorine ions, though the degree of the damage mainly depends upon the characteristics of the electrolyte and rubber seal material. When halogen ions come into contact with the capacitors, the foil corrodes when voltages applied. This corrosion causes ; extremely high leakage current, which causes in line with, venting, and an open circuit.
Global environmental warnings (Greenhouse effects and other environmental destruction by depletion of the ozone layer), new types of cleaning agents have been developed and commercialized as substitutes for CFC-113,1,1,2-trichloroethylene and 1,1,1-trichloroethylene. The following are recommended as cleaning conditions for some of new cleaning agents.

–Higher alcohol system cleaning agents

Recommended cleaning agents:

Pine Alpha ST-100S (Arakawa Chemical)
Clean Through 750H, 750K, 750L, and 710M (Kao)
Technocare FRW-14 through 17 (Toshiba)
Cleaning conditions:



PRECAUTIONS AND GUIDELINES

Using these cleaning agents capacitors are capable of withstanding immersion or ultrasonic cleaning for 10 minutes at a maximum liquid temperature of 60°C. Find optimum condition for washing, rinsing, and drying. Be sure not to rub the marking off the capacitor by contacting any other components or the PC board. Note that shower cleaning adversely affects the markings on the sleeve.

–Non-Halogenated Solvent Cleaning

AK225AES (Asahi Glass)

Cleaning conditions:

Solvent-proof capacitors are capable of withstanding any one of immersion, ultrasonic or vapor cleaning for 5 minutes; exception is 2 minutes max. for KRE, and KRE-BP series capacitors and 3 minutes for SRM series capacitors. However, from a view of the global environmental problems, these types of solvent will be banned in near future. We would recommend not using them as much as possible.

Isopropyl alcohol cleaning agents

IPA (Isopropyl Alcohol) is one of the most acceptable cleaning agents; it is necessary to maintain a flux content in the cleaning liquid at a maximum limit of 2 Wt.%.

5 Precautions for using adhesives and coating materials

- a) Do not use any adhesive and coating materials containing halogenated solvent.
- b) Verify the following before using adhesive and coating material.
 - Remove flux and dust leftover between the rubber seal and the PC board before applying adhesive or coating materials to the capacitor.
 - Dry and remove any residual cleaning agents before applying adhesive and coating materials to the capacitors. Do not cover over the whole surface of the rubber seal with the adhesive or coating materials.
 - For permissible heat conditions for curing adhesives or coating materials, follow the instructions in the catalogs or the product specifications of the capacitors.
 - Covering over the whole surface of the capacitor rubber seal with resin may result in a hazardous condition because the inside pressure cannot release completely. Also, a large amount of halogen ions in resins will cause the capacitors to fail because the halogen ions penetrate into the rubber seal and the inside of the capacitor.
- c) Some of coating material cannot be cured over the capacitor. Please note that loose luster and whitening on the surface of the outer sleeve might be caused according to the kind of solvents used for mounting adhesives and coating agents.

6 Fumigation

In many cases when exporting or importing electronic devices, such as capacitors, wooden packaging is used. In order to control insects, many times, it becomes necessary to fumigate the shipments. Precautions during "Fumigation" using halogenated chemical such as Methyl Bromide must be taken. Halogen gas can penetrate packaging materials used, such as, cardboard boxes and vinyl bags. Penetration of the halogenide gas can cause corrosion of Electrolytic capacitors.

The Operation of Devices

- a) Do not touch a capacitor directly with bare hands.
- b) Do not short-circuit the terminal of a capacitor by letting it come into contact with any conductive object.
Also, do not spill electric-conductive liquid such as acid or alkaline solution over the capacitor.
- c) Do not use capacitors in circumstance where they would be subject to exposure to the following materials exist or expose.
 - Oil, water, salty water or damp location.
 - Direct sunlight.

- Toxic gases such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine or its compounds, and ammonium.
- Ozone, ultraviolet rays or radiation.
- Severe vibration or mechanical shock conditions beyond the limits prescribed in the catalogs or product specification.

Maintenance Inspection

- a) Make periodic inspections of capacitors that have been used in industrial applications. Before inspection, turn off the power supply and carefully discharge the electricity in the capacitors. Verify the polarity when measuring the capacitors with a volt-ohm meter. Also, do not apply any mechanical stress to the terminals of the capacitors.
- b) The following items should be checked during the periodic inspections.
 - Significant damage in appearance : venting and electrolyte leakage.
 - Electrical characteristics: leakage current, capacitance, $\tan\delta$ and other characteristics prescribed in the catalogs or product specifications.We recommend replacing the capacitors if the parts are out of specification.

In Case of Venting

- a) If a non-solid aluminum electrolytic capacitor expels gas when venting, it will discharge odors or smoke, or burn in the case of a short-circuit failure. Immediately turn off or unplug the main power supply of the device.
- b) When venting, a non-solid aluminum electrolytic capacitor blows out gas with a temperature of over 100°C. (A solid aluminum electrolytic capacitor discharges decomposition gas or burning gas while the outer resin case is burning.) Never expose the face close to a venting capacitor. If your eyes should inadvertently become exposed to the spouting gas or you inhale it, immediately flush the open eyes with large amounts of water and gargle with water respectively. If electrolyte is on the skin, wash the electrolyte away from the skin with soap and plenty of water. Do not lick the electrolyte of non-solid aluminum electrolytic capacitors.

Storage

We recommend the following conditions for storage.

- a) Do not store capacitors at a high temperature or in high humidity. Store the capacitors indoors at a temperature of 5 to 35°C and a humidity of less than 75%RH.
- b) Store the capacitors in places free from water, oil or salt water.
- c) Store the capacitors in places free from toxic gasses (hydrogen sulfide, sulfurous acid, chlorine, ammonium, etc.)
- d) Store the capacitors in places free from ozone, ultraviolet rays or radiation.
- e) Keep capacitors in the original package.
- f) It is not applied to a regulation of JEDEC J-STD-020(Rev.C). But MSL (Moisture Sensitivity Level) is suitable for Level 1. A time limit for keeping goods under packed situation is within 3 years after manufacturing.

Disposal


Please consult a local specialist regarding the disposal of industrial waste when disposing aluminum electrolytic capacitors.

Catalogs

Specifications in catalogs may be subject to change without notice. For more details of precautions and guidelines for aluminum electrolytic capacitors, please refer to Engineering Bulletin No. 634A.

Structure of Aluminum Electrolytic Capacitors

The aluminum electrolytic capacitor contains an internal element of an anode foil, a cathode foil and paper separator rolled together, impregnated with an electrolyte, then attached to external terminals connecting the tabs with the anode or the cathode foils, and sealed in a can case.

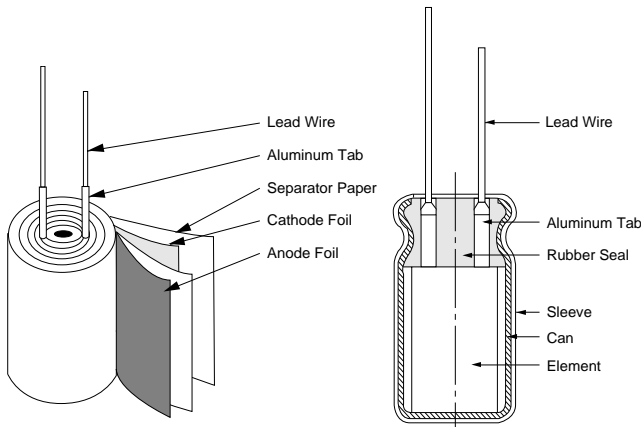

Among various types of capacitors, an aluminum electrolytic capacitor offers large CV to volume and features low cost. The capacitance (C) of aluminum electrolytic capacitors, as well as other capacitors, is expressed by the following equation:

$$C = 8.854 \times 10^{-12} \times \frac{\epsilon S}{d} \text{ (F)}$$

Where : ϵ =Dielectric constant
S=Surface area of dielectric (m²)
d=Thickness of dielectric (m)

This equation shows that the capacitance increases in proportion as the dielectric constant becomes high, its surface area becomes large and the thickness of dielectric becomes thin. In aluminum electrolytic capacitors the dielectric constant of an aluminum oxide (Al₂O₃) layer is 8 to 10, which is not as high as compared with the other types of capacitors. However, the dielectric layer of the aluminum oxide is extremely thin (about 15Å per volt) and the surface area is very large. An electrochemical formed electrode foil makes the dielectric on the etched surface of aluminum electrode foil. Electrochemical etching creates 20 to 100 times more surface area as plain foil. Therefore, an aluminum electrolytic capacitor can offer a large capacitance compared with other types.

Primary of Composition Material

Anode aluminum foil:

First, the etching process is carried out electromechanically with a chloride solution which dissolves metal and increases the surface area of the foil; forming a dense network like innumerable microscopic channels. Secondly, the formation process is carried out with a solution such as ammonium borate which forms the aluminum oxide layer (Al₂O₃) as a dielectric at a thickness of about 1.1 to 1.5nm / volt. The process needs to charge more the rated voltage into the foil.

Cathode aluminum foil:

As in the first manufacturing process of the positive foil, the cathode foil requires etching process. Generally, it does not require the formation process; therefore, the natural oxide layer of Al₂O₃, which gives a characteristic dielectric voltage of 1.0 volts, is formed.

Electrolyte and separator:

In a non-solid aluminum electrolytic capacitor, the electrolyte, an electrically conductive liquid, functions as a true cathode by contacting the dielectric oxide layer. Accordingly, the "cathode foil" serves as an electrical connection between the electrolyte and terminal.


The separator functions to retain the electrolyte and prevent the anode and cathode foils from short-circuiting.

Can case and sealing materials:


The foils and separator are wound into a cylinder to make an internal element, which is impregnated with the electrolyte, inserted into an aluminum can case and sealed. During the service life of a capacitor, electrolyte slowly and naturally vaporizes by electrochemical reaction on the boundary of the aluminum foils. The gas will increase the pressure inside the case and finally cause the pressure relief vent to open or the sealing materials to bulge. The sealing material functions not only to prevent electrolyte from drying out but also to allow the gas to escape out of the can case in a controlled manner.

The Equivalent Circuit

As the equivalent circuit of an aluminum electrolytic capacitor is shown below, it forms a capacitance, a series resistance, an inductance, and a parallel resistance.

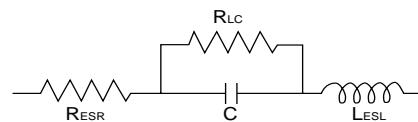

RESR=Equivalent series resistance (ESR)
RLC =Resistance due to leakage current
C =Capacitance
LESL =Equivalent series inductance

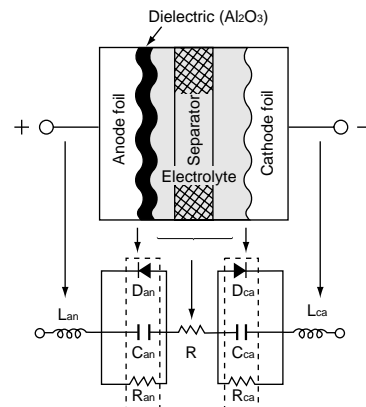

From a composition material point wise, the equivalent circuit is subdivided as follows.


C_{an}, C_{ca}=Capacitance due to anode and cathodes foils
R =Resistance of electrolyte and separator
R_{an}, R_{ca}=Internal resistance of oxide layer on anode and cathode foils
D_{an}, D_{ca}=Diode effects due to oxide layer on anode and cathode foils
L_{an}, L_{ca} =Inductance due to anode and cathode terminals

Basic Electrical Characteristics

Capacitance:


The capacitance of capacitor is expressed as AC capacitance

by measuring impedance and separating factors. Also, the AC capacitance depends upon frequency, voltage and other measuring methods. In fact, JIS C 5101 prescribes that the series capacitive factor of an equivalent series circuit shall be the capacitance measured at a frequency of 120Hz and applying a maximum AC voltage of 0.5V rms with a DC bias voltage of 1.5 or 2.0V to aluminum electrolytic capacitors. The capacitance of an aluminum electrolytic capacitor becomes smaller with increasing frequency. See the typical behavior shown below.

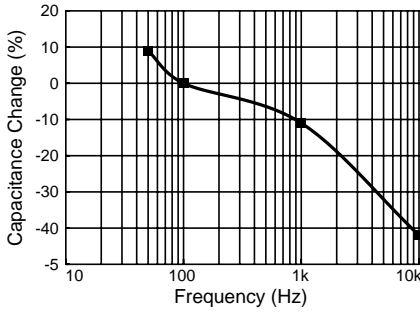

Capacitance VS. Frequency

The capacitance value is highly dependent upon temperature and frequency. As the temperature decreases, the capacitance becomes smaller. See the typical behavior shown below.

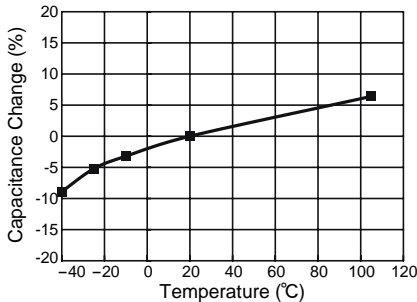


Temperature Characteristics of Capacitance

On the other hand, DC capacitance, which can be measured by applying a DC voltage, shows a slightly larger value than the AC capacitance at a normal temperature and has the flatter characteristic over the temperature range.

tanδ(tangent of loss angle or dissipation factor):

The tanδ is expressed as the ratio of the resistive component (RESR) to the capacitive reactance (1/ωC) in the equivalent series circuit. Its measuring conditions are the same as the capacitance.





$$\tan\delta = R_{ESR} / (1/\omega C) = \omega C R_{ESR}$$


Where : $R_{ESR} = ESR$ at 120Hz

$$\omega = 2\pi f$$

$$f = 120\text{Hz}$$

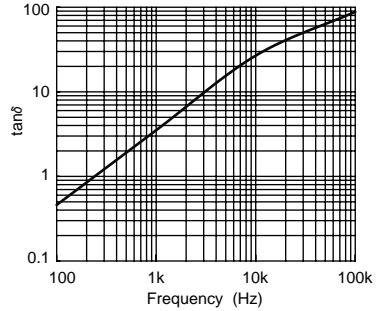

tanδ VS. Frequency

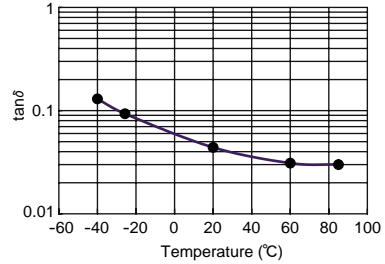

Temperature Characteristics of tanδ

Equivalent series resistance (ESR):

The ESR is the series resistance consisting of the aluminum oxide layer, electrolyte/separator combination, and other resistance related factors, foil length, foil surface area and others.

The ESR value depends upon the temperature. Decreasing the temperature makes the resistivity of the electrolyte increase and leads to increasing ESR.

As the measuring frequency increases, the ESR decreases and reaches an almost constant value that mainly dominates the frequency-independent resistance relating electrolyte/separator combination.

Impedance (Z):


The impedance is the resistance of the alternating current at a specific frequency. It is related to capacitance (C) and inductance (L) in terms of capacitive and inductive reactance, and also related to the ESR. It is expressed as follows:

$$Z = \sqrt{ESR^2 + (X_L - X_C)^2}$$

Where : $X_C = 1/\omega C = 1/2\pi f C$

$$X_L = \omega L = 2\pi f L$$


As shown below, the capacitive reactance (Xc) dominates at the range of low frequencies, and the impedance decreases with increasing frequency until it reaches the ESR in the middle frequency range. At the range of the higher frequencies the inductive reactance (XL) comes to dominate, so that the impedance increases when increasing the measuring frequency.

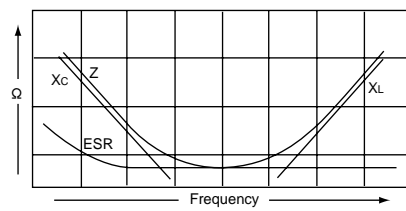

Impedance VS. Frequency

The tanδ shows higher values as the measured frequency increases and the measured temperature decreases.


As shown at the next page, the impedance value varies with temperature because the resistance of the electrolyte is strongly affected by temperature.

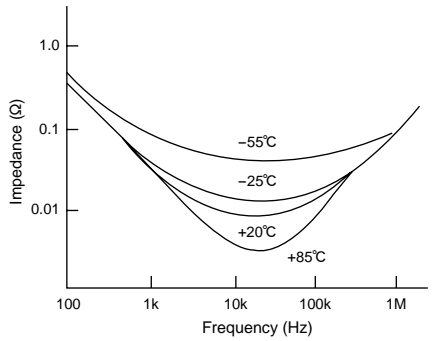

Temperature Characteristics of Impedance


Leakage current:

The dielectric of a capacitor has a very high resistance that does not allow DC current to flow. However, due to the characteristics of the aluminum oxide layer that functions as a dielectric in contact with electrolyte, a small amount of current, called leakage current, will flow to reform and repair the oxide layer when a voltage is being applied. As shown below, a high leakage current flows to charge voltage to the capacitor for the first seconds, and then the leakage current will decrease and reach an almost steady-state value with time.



Leakage Current VS. Time

Measuring temperature and voltage influences the leakage current. The leakage current shows higher values as the temperature and voltage increase.

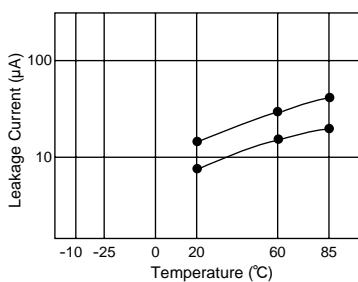


Typical Temperature Characteristics

In general, the leakage current is measured at 20°C by applying the rated voltage to capacitor through a resistor of 1000Ω in series. The leakage current is the value several minutes later after the capacitor has reached the rated voltage. The catalog prescribes the measuring temperature and time.

Reliability

The bathtub curve:

Aluminum electrolytic capacitors feature failure rates shown by the following bathtub curve.

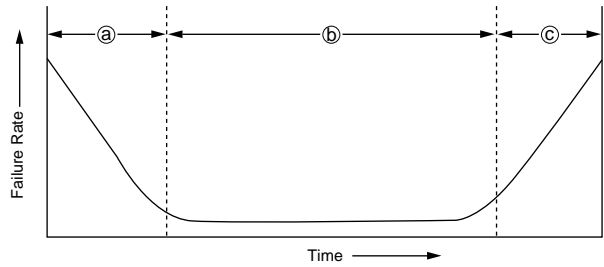

a) Infant failure period

This initial period accounts for the failures caused by deficiencies in design, structure, the manufacturing process or severe misapplications. In other words the initial failures occur as soon as the components are installed in a circuit. In the case of aluminum electrolytic capacitors, these failures do not occur at customers' field because aging process reforms an incomplete oxide layer, or eliminate the defective parts at the aging process and the sorting process. Misapplication of the capacitor such as inappropriate ambient conditions, over-voltage, reverse voltage, or excessive ripple current should be avoided for proper use of the capacitor in a circuit.

b) Useful life period

This random failure period exhibits an extremely low failure rate. These failures are not related to operating time but to application conditions. During this period, non-solid aluminum electrolytic capacitors lose a small amount of electrolyte. The electrolyte loss shows as a slow decrease in capacitance and a slow increase in $\tan\delta$ and ESR. Non-solid aluminum electrolytic capacitors still exhibit lower catastrophic failures than semiconductors and solid tantalum capacitors.

c) Wear-out failure period

This period reflects a deterioration in the component properties of the capacitor ; the failure rate increases with time. Non-solid aluminum electrolytic capacitors end their useful life during this period.

Failure types:

The two types of failures are classified as catastrophic failures and wear-out failures as follows.

1) Catastrophic failures


This is a failure mode that destroys the function of the capacitor like a short circuit or open circuit failure.

2) Wear-out failures

This is a failure mode where gradually deteriorates; the electrical parameters of the capacitor. The criteria of judging the failures, vary with application and design factors. Capacitance decreases and $\tan\delta$ increases are caused by the loss of electrolyte in the wear-out failure period. This is primary due to loss of electrolyte by diffusion (as vapor) through the sealing material. Gas molecules can diffuse out through the material of the end seal. High temperature increase the electrolyte vapor pressure within the capacitor and the diffusion rate is therefore increased. This increases internal pressure may cause the seal to bulge caused by elevated temperatures. This bulging may accelerate diffusion and mechanically degrade the seal. Factors that can increase the capacitor temperature, such as ambient temperature and ripple current, can accelerate the wear-out phase of a capacitor.

Failure modes:

Aluminum electrolytic capacitors show various failure modes in different applications. (See Table 1.)

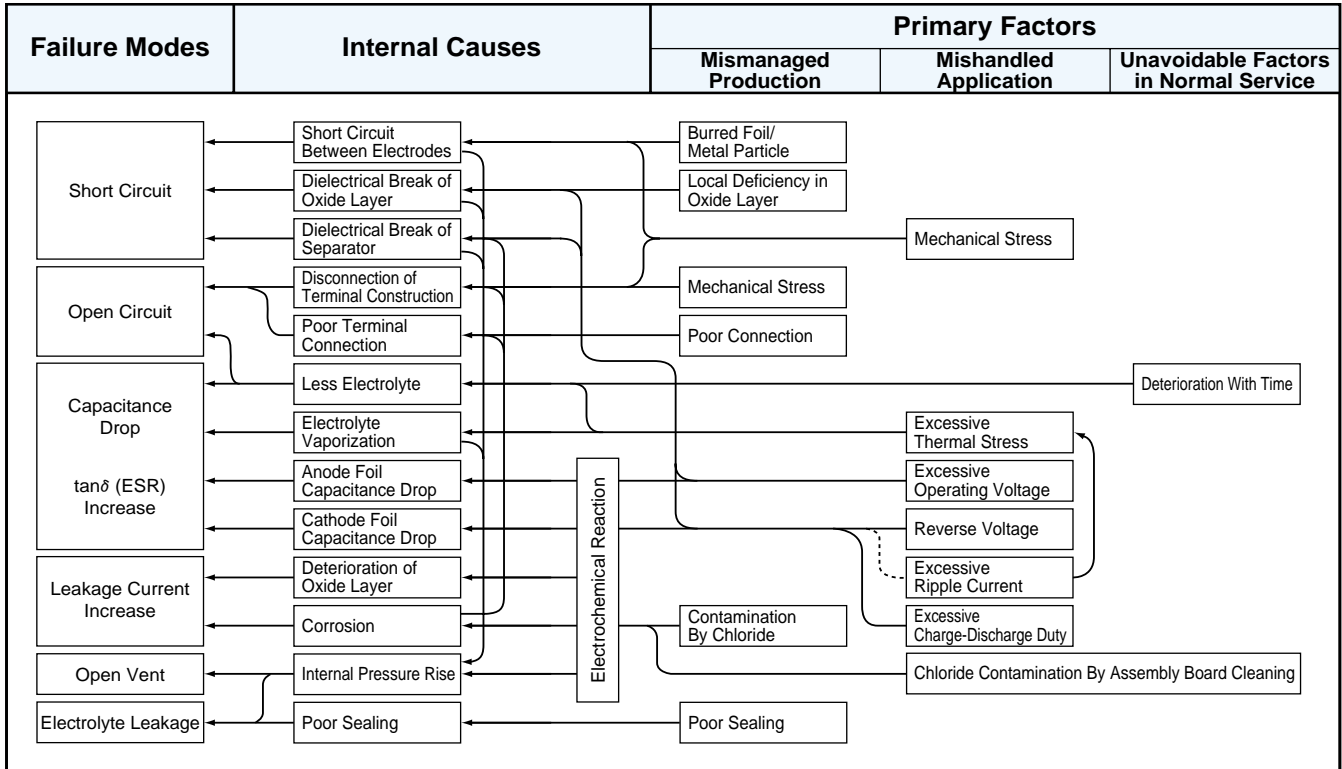

Life of Aluminum Electrolytic Capacitors

The life of aluminum electrolytic capacitors is largely dependent on environmental and electrical factors. Environmental factors include temperature, humidity, atmospheric pressure and vibration. Electrical factors include operating voltage, ripple current and charge-discharge duty cycles. The factor of temperature (ambient temperature and internal heating due to ripple current) is the most critical to the life of aluminum electrolytic capacitors.

General formula to estimate lifetime:

The lifetime of non-solid aluminum electrolytic capacitors is generally expressed by using three elements representing the effects of ambient temperature, applying voltage and ripple current, which is shown by the following equation:

$$L_x = L_0 \cdot K_{Temp} \cdot K_{Voltage} \cdot K_{Ripple}$$

- Where : L_x = Lifetime of capacitor to be estimated
 L_0 = Base lifetime of capacitor
 K_{Temp} = Ambient temperature acceleration term
 $K_{Voltage}$ = Voltage acceleration term
 K_{Ripple} = Ripple current acceleration term

K_{Temp} (Effects of ambient temperature on life):

Because an aluminum electrolytic capacitor is essentially an electrochemical component, increased temperatures accelerate the chemical reaction producing gas within the capacitor which is diffused through the end seal, and consequently accelerates a gradual decrease in capacitance and a gradual increase in $\tan\delta$ and ESR. The following equation has been experimentally found to express the relationship between the temperature acceleration factor and the deterioration of the capacitor.

$$L_x = L_0 \cdot K_{Temp} = L_0 \cdot B^{(T_0 - T_x) / 10}$$

$$K_{Temp} = B^{(T_0 - T_x) / 10}$$

- Where : L_x = Lifetime (hour) of capacitor to be estimated
 L_0 = Base lifetime (hour) of capacitor
 T_0 = Maximum rated category temperature (°C) of capacitor shown in catalog
 T_x = Actual ambient temperature (°C) of capacitor
 B = Temperature acceleration factor (≈ 2)

This equation is similar to Arrhenius' equation that expresses a relationship between chemical reaction rates and temperature, and called Arrhenius' rule of aluminum electrolytic capacitors. The temperature acceleration factor (B) is approximately 2 over an ambient temperature range (T_x) from 40°C to the maximum rated category temperature of each capacitor. It means that the lifetime is approximately halved with every 10°C rise in ambient temperature and can be extended by using the capacitors at low temperatures. For an ambient temperature range (T_x) of 20°C to 40°C, the factor B will be close to 2, and the lifetime will actually be extended. However, operating and surrounding conditions, especially the operating conditions influence ambient temperatures mutually. The ambient temperature in this range will be very changeable; therefore, lifetime estimation under 40°C should use 40 as T_x .

$K_{Voltage}$ (Effects of applying voltage to life):

Miniature and large sized aluminum electrolytic capacitors for popular applications, such as surface mount types, radial lead types, snap-in types and block types, have little voltage effect on their life. Other factors like temperature and ripple current determine the life in comparison with voltage, as long as the capacitors are used at voltages and temperatures within the specifications prescribed in the catalog. Consequently, $K_{Voltage}=1$ is used for these capacitors. 350V and higher screw-mount terminal types of capacitors for customer-use power electronics applications allow the life time to extend by applying low voltage, relating to the characteristics of their aluminum oxide layer. RWE, RWY, RWL, RWF, LX(Screw-mount), LXA(Screw-mount) and LXR series are applicable to the method. For $K_{Voltage}$ values of these products, please contact a representative of Nippon Chemi-Con.

K_{Ripple} (Effects of ripple current to life):

Aluminum electrolytic capacitors have higher $\tan\delta$ than any other types of capacitors; therefore, the ripple current gives aluminum electrolytic capacitors higher internal heat. Be sure to check the rated ripple current which is specified in the catalog for assuring the life.

The ripple current through the capacitor produces heat by dissipating power from the capacitor. This leads to temperature increase. Internal heating produced by ripple currents can be expressed by:

$$W = (I_{\text{Ripple}})^2 \cdot R_{\text{ESR}} + V \cdot I_{\text{Leakage}}$$

Where : W = Internal power loss
 I_{Ripple} = R.M.S. ripple current
 R_{ESR} = Internal resistance (ESR) at ripple frequency
 V = Applied voltage
 I_{Leakage} = Leakage current

Leakage current may be 5 to 10 times higher than the values measured at 20°C, but compared with ripple, the leakage current value is very small and negligible. Thus, the above equation can be simplified:

$$W = (I_{\text{Ripple}})^2 \cdot R_{\text{ESR}}$$

The following equation gives the internal heat rise; it is heat rise to stable condition. (It is necessary to input several factors.):

$$(I_{\text{Ripple}})^2 \cdot R_{\text{ESR}} = \beta \cdot A \cdot \Delta T$$

Where : β = Heat transfer constant
 A = Surface area of can case
 $A = (\pi/4) \cdot D \cdot (D + 4L)$
 Where : D = Can diameter
 L = Can length
 ΔT = An increase in core temperature by internal heating due to ripple current
 (ΔT = Core temperature - Ambient temperature)

From the above equation, internal temperature rise (ΔT) produced by ripple current is given by:

$$\Delta T = (I_{\text{Ripple}})^2 \cdot R_{\text{ESR}} / (\beta \cdot A)$$

When the ripple frequency is 120Hz, R_{ESR} at 120Hz is expressed by
 $R_{\text{ESR}} = \tan \delta / (\omega \cdot C)$
 $\Delta T = (I_{\text{Ripple}})^2 \cdot \tan \delta / (\beta \cdot A \cdot \omega \cdot C)$
 Where : $\tan \delta$ = 120Hz value
 $\omega = 2\pi \cdot f = 2\pi \cdot 120\text{Hz}$
 C = 120Hz capacitance value

As above equation, ΔT varies with frequency of ripple, frequency and temperature dependent ESR, and application dependent β (even ripple current is constant). We really recommend that customers measure ΔT with a thermocouple at the actual operating conditions of the application in lieu of using the above equation. (Another approximation of ΔT will be stated later.)

As mentioned in the paragraph of K_{Temp} , aluminum electrolytic capacitors will slowly increase in $\tan \delta$ and ESR during their service life. The application without ripple current has no influence on the life of the capacitor even though the ESR will increase during life. In other words, the application with ripple current makes ΔT increase; furthermore, a ΔT increase results in ESR increase. The ESR increase then makes ΔT increase. It is a chain reaction. Theoretically, the ripple current acceleration term (K_{Ripple}) cannot be simply expressed like the ambient temperature acceleration term (K_{Temp}). Practically, the ripple current acceleration term (K_{Ripple}) can be approximately expressed by an equation using a ΔT initially measured. The following table shows the ripple current acceleration term (K_{Ripple}) for each capacitor design group.

K_{Ripple}	Products		
	Type	Series	
$2^{(-\Delta T / 5)}$	Surface mount	MVS, MVA, MV, MVE, MVK, MKA, MZA, MVY, MLA MVJ, MVL, MVH, MV-BP, MVK-BP	
	Radial lead	KMA, KME-BP, KRE, KRG, LLA, SME, SMQ, SME-BP, SMG, SRA, SRE, SRG, SRM	
	Screw-mount terminal	KW	
$2^{(\Delta T_0 - \Delta T) / 5}$	$\Delta T_0 = 5 \text{ deg}$	Radial lead	FL, GXE ($T_0 \leq 105^\circ\text{C}$), KLG, KME, KMQ, KMF, KMG, KMH, KMX, KXG, PAG, LBG, LXV, LXW, LXZ, KZM, KZH, KZE, KY, KXJ, GPA, KLJ, KMR
		Pin terminal	KMH, KMM, KMQ, LXG, LXM, LXH, LXQ, CHA
		Screw-mount terminal	LXA (10 to 250V _{dc}), KMH
	$\Delta T_0 = 5 \text{ to } 10 \text{ deg}$ Contact us for details	Radial lead	SMH
		Pin terminal	SMH, SMM, SMQ, SLM, RWE-LR
		Screw-mount terminal	SME
$2^{[-2 + (25 - \Delta T) / b]}$	Screw-insert terminal	LXA (350 to 525V _{dc}), RWE, RWF, RWL, LXR, RWY, RWG	
Note : ΔT = An increase (deg) in core temperature produced by internal heating due to actual operating ripple current. The ΔT is the difference between the core temperature and ambient temperature measured at the actual operating conditions. ΔT_0 = An increase (deg) in core temperature by internal heating due to rated ripple current. b = Factor b varies from 5 to 10 by the conditions of ripple frequency and ΔT . Please contact a representative of Nippon Chemi-Con for the details			

Note that a ΔT over a certain maximum limit may over-heat the capacitors, though the lifetime estimation will not give you practical lifetime. For instance, the following shows a guide limit of ΔT at each ambient temperature for 105°C maximum rated products.

Ambient temperature T_x (°C)	85	105
Guide limit of ΔT (deg)	15	5
Core temperature (= $T_x + \Delta T$)	100	110

Approximation of ΔT

Estimation of the lifetime requires two temperature measurements; first obtain ΔT by actually measuring the core temperature, inserting the thermocouple inside the operating capacitor and secondary, the ambient temperature. A more convenient way to get the ΔT is to convert the surface temperature of the capacitor case and the ambient temperature by using a coefficient specified for each case diameter as follows:

$$\Delta T = K_c \cdot (T_s - T_x)$$

Where : K_c = Coefficient from table below
 T_s = Surface temperature (deg) of capacitor case
 T_x = Ambient temperature (deg)

No air flow conditions.

Diameter (mm)	$\phi 5$ to $\phi 8$	$\phi 10$	$\phi 12.5$	$\phi 16$	$\phi 18$	$\phi 22$	$\phi 25$	
K_c	1.10	1.15	1.20	1.25	1.30	1.35	1.40	
Diameter (mm)	$\phi 30$	$\phi 35$	$\phi 40$	$\phi 50$	$\phi 63.5$	$\phi 76$	$\phi 89$	$\phi 100$
K_c	1.50	1.65	1.75	1.90	2.20	2.50	2.80	3.10

Also, you can roughly estimate a ΔT by using the following equation without need to measure.

$$\Delta T = \Delta T_0 \cdot (I_x / I_0)^2$$

Where : $\Delta T_0 = 5$ deg for 105°C maximum rated capacitors.
 I_0 = Rated ripple current (A_{RMS}) : if its frequency is different from operating ripple current I_x , it needs converting by using a frequency multiplier prescribed in the catalog.
 I_x = Operating ripple current (A_{RMS}) actually flowing into a capacitor

Like switching power supplies, if the operating ripple current consists of commercial frequency element and switching frequency element(s), an internal power loss is expressed by the following equation.

$$W = (I_{f1})^2 \cdot ESR_{f1} + (I_{f2})^2 \cdot ESR_{f2} + \dots + (I_{fn})^2 \cdot ESR_{fn}$$

Where : W = Internal power loss
 $I_{f1} \dots I_{fn}$ = Ripple currents at every frequencies $f_1 \dots f_n$
 $ESR_{f1} \dots ESR_{fn} = ESR$'s at every frequencies $f_1 \dots f_n$

The above equation can be transformed into another equation to get a ripple current value in accordance with the frequency of the rated ripple current, each of $ESR_{f1} \dots ESR_{fn}$ is approximately equal to ESR_{f0} divided by square value of the frequency multiplier ($F_{f1} \dots F_{fn}$). Here ESR_{f0} is the value at the frequency of the rated ripple current and $F_{f1} \dots F_{fn}$ is a conversion coefficient from one frequency to another in accordance with the frequency $f_1 \dots f_n$.

$$\begin{aligned} ESR_{f1} &= ESR_{f0} / (F_{f1})^2 \\ &\vdots \\ ESR_{fn} &= ESR_{f0} / (F_{fn})^2 \end{aligned}$$

Relationship of $w = (L_{Ripple})^2 \cdot R_{ESR}$ leads I_x as follows:

$$I_x = \sqrt{W / ESR_{f0}}$$


The above is rewritten in the following equation:

$$I_x = \sqrt{(I_{f1}/F_{f1})^2 + (I_{f2}/F_{f2})^2 + \dots + (I_{fn}/F_{fn})^2}$$

Where : I_x = Ripple current in accordance with the frequency of the rated ripple current
 $I_{f1} \dots I_{fn}$ = Operating ripple currents at every frequency $f_1 \dots f_n$
 $F_{f1} \dots F_{fn}$ = Frequency multipliers for every frequency $f_1 \dots f_n$ prescribed in the catalog, based on the fact that the internal resistance of a capacitor varies with frequency.


Cleaning Agents

- Cleaning agents penetrate into a capacitor.
Solvent contacts the rubber seal of a capacitor. Some percentage of solvent does not penetrate but a percentage succeeds in entering and defusing inside the capacitor.
- Cleaning agents decompose and release halogen ions.
In the electrolyte of the inside element, the halides in the cleaning agents become hydrolyzed and release halogen ions as follows,



c. Corrosion

The halogen ions attack the aluminum foil by the following anodic half-cell reaction:



The AlX_3 further becomes hydrolyzed and release the halogen ion again:



The halogen ions release by this hydrolysis reaction further attacks the aluminum according to the previous reaction formula, and these reactions are repeated and accelerated when voltage and temperature is applied. Also, the hydrogen ions increase the local acidity which causes the oxide dielectric to dissolve. Thus, localized corrosion accelerates to corrode both the aluminum metal and the dielectric. In addition, a terpene or petroleum system cleaning solvent will be absorbed into the rubber seal of the capacitor. The rubber seal finally weakens. An alkaline saponification detergent will damage the aluminum metal and marking. In summary, recommended cleaning agents are halogen free. Terpene, petroleum, alkali detergent and any solvent making the rubber seal material deteriorate are not recommended.

Compatible cleaning agents:

In line with recent global environmental warnings (Greenhouse effect and other environmental destruction by depletion of the ozone layer), new types of cleaning agents have been commercialized and substituted as CFC-113, 1,1,2-trichloroethylene and 1,1,1-trichloroethylene. The following are recommended cleaning conditions for some of new cleaning agents.

Higher alcohol system cleaning agents

Recommended cleaning agents:

Pine Alpha ST-100S (Arakawa Chemical)
 Clean Through 750H, 750K, 750L, and 710M (Kao)
 Technocare FRW-14 through 17 (GE Toshiba Silicones)

Cleaning conditions:

- Capacitors are capable of withstanding immersion or ultrasonic cleaning for 10 minutes at a maximum liquid temperature of 60°C using the above cleaning agents. Find the optimum conditions for washing, rinsing, and drying. Be sure not to rub the marking off the capacitor by contact with any other components on the PC board. Note that shower cleaning adversely affects the marking.
- To rinse by water, control the conditions such as temperature and water pressure to avoid sleeve shrinkage.
- Clean Through 750H and similar are weak-alkaline solvents. Do not leave the alkaline on the capacitor after cleaning process.

CFCs substitute solvents (HCFC system)

Asahi Glass AK225AES solvent is usable only with solvent-proof type capacitors, which are designed with reinforced seal constructions and modified electrolyte. This product does not penetrate the capacitor and deactivate halogen ions. However, AK225AES is one of the solvents which will have a restricted usage in future from the environmental point of view.



PRECAUTIONS AND GUIDELINES

Non-Halogenated Solvent Cleaning

HCFC solvents: AK225AES (Asahi Glass)

Cleaning conditions:

Solvent-proof type capacitors are capable of withstanding immersion, ultrasonic or vapor cleaning for 5 minutes; exception is 2 minutes max. for KRE and KRE-BP series capacitors for 3 minutes and SRM series capacitors.

Applicable series (only for solvent-proof products):

Surface mount : MVS, MVA(4 to 63V_{dc}), MV, MVE(6.3 to 63V_{dc}), MVK, MKA, MZA, MLA, MVY(6.3 to 63V_{dc}), MVJ, MVL, MVH(10 to 50V_{dc}), MV-BP, MVK-BP, PXF, PXE, PXA, PXH, MZD, MLD

Radial lead : SRM, KRE, KMA, SRG, KRG, SMG(6.3 to 250V_{dc}), SME-BP, KMQ(6.3 to 100V_{dc}), KMG(6.3 to 250V_{dc}), KME-BP, LXZ, LXY, LXV, FL, GXE(10 to 50V_{dc}), GXL, LBG, LLA, PS, PSC, PSA, GPA

Isopropyl alcohol cleaning agents

IPA (Isopropyl Alcohol) is one of the most acceptable cleaning agents; it is necessary to maintain a flux content in the cleaning liquid at a maximum limit of 2 Wt. %, because chlorides in flux dissolves in the cleaning liquid during the cleaning process.

Xylene -additive IPA may make the rubber seal deteriorate.

Non-clean flux

Both ionic halogen and non-ionic halogens damage the capacitor when they penetrate in through the rubber seal. Note that some of the fluxes called non-halogenated flux contains less ionic halogen activator but actually a large amount of non-ionic halogen.

Per our analysis, AHQ3100K(Asahi) and POZ6(Senjyu) minimize ionic and non-ionic halogens.


Other Precautions to wash capacitors

- a) Monitor conductivity, pH, specific gravity and water content of cleaning agents. Contamination adversely affects the characteristics.
- b) The solvent may stay between the end seal and the PC board if the capacitor is mounted directly onto the PCB without a small gap. The residual solvent can cause defects. Also, washing for more than the specified time causes solvent residual. Therefore, wash the assembly board for at least 10 minutes at the recommended temperature. Be sure not to expose the capacitors under solvent rich conditions or keep capacitors inside a closed container.
- c) Reforming the leads of the capacitor to fit lead spacing on the PC board causes cleaning agents to get into the inside capacitor. This may result in corrosion to the foil. Therefore, use the capacitors, which fit the hole spacing on the PC board or reform the lead wires in a manner which will not cause mechanical stress to the capacitor body.

A guide to global code (Surface mount type)

(Example : MVA series, 25V-47 μ F, ϕ 6.3X5.2L)

Refer to the following table about global code for surface mount type

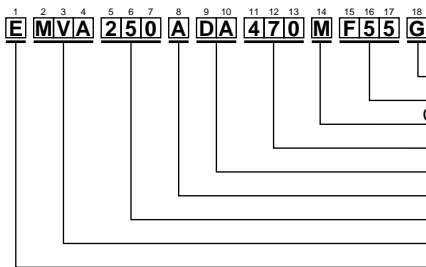

①Category

Contents	Code
	1st
Polar	E
Bi-polar	B

②Series code

Series name	Code		
	2nd	3rd	4th
MVA	M	V	A
MV	M	V	—
No series name	C	S	T

③Voltage code

Voltage (V)	Code		
	5th	6th	7th
4	4	R	0
6.3	6	R	3
10	1	0	0
16	1	6	0
25	2	5	0
35	3	5	0
50	5	0	0
63	6	3	0
80	8	0	0
100	1	0	1
160	1	6	1
200	2	0	1
250	2	5	1
400	4	0	1
450	4	5	1

④Terminal code

Type		Code
		8th
Vertical	No dummy terminal	A
	With dummy terminal	G
Horizontal	No dummy terminal	C
	With dummy terminal	D

⑤Taping / Tray code

Taping type	Reel dia. ϕ (mm)	Code		Application size ϕ D (mm)
		9th	10th	
Reel (Cardboard)	380	D	A	ϕ D=3 to 18 (not ϕ D=12.5)
Reel (Cardboard)	330	D	B	ϕ D=3 to 18
Reel (Plastic)	380	P	A	ϕ D=3 to 10
Reel for reuse	380	R	A	ϕ D=3 to 12.5

Package	Code		Application size ϕ D(mm)
	9th	10th	
Tray	T	R	ϕ D=12.5 to 18

Refer product guide for taping and tray specifications.

⑥Capacitance code

Cap. (μ F)	Code		
	11th	12th	13th
0.1	R	1	0
0.15	R	1	5
0.22	R	2	2
0.33	R	3	3
0.47	R	4	7
0.68	R	6	8
1.0	1	R	0
1.5	1	R	5
2.2	2	R	2
3.3	3	R	3
4.7	4	R	7
6.8	6	R	8
10	1	0	0
15	1	5	0
22	2	2	0
33	3	3	0
47	4	7	0
56	5	6	0
68	6	8	0
100	1	0	1
150	1	5	1
180	1	8	1
220	2	2	1
330	3	3	1
470	4	7	1
680	6	8	1
820	8	2	1
1,000	1	0	2
1,500	1	5	2
2,200	2	2	2
3,300	3	3	2
4,700	4	7	2
6,800	6	8	2
8,200	8	2	2
10,000	1	0	3

⑦Capacitance tolerance

Tol. (%)	Code
	14th
\pm 20	M

⑧Size code (Vertical)

ϕ D (mm)	Code
	15th
3	B
4	D
5	E
6.3	F
8	H
10	J
12.5	K
16	L
18	M

L (mm)	Code	
	16th	17th
4.5	4	6
5.2	5	5
5.7	6	0
5.8	6	1
6.3	6	3
7.0	7	3
7.7	8	0
8.7	9	0
10	A	0
13.5	E	0
16	G	5
16.5	H	0
21.5	N	0


⑨Supplement code

ϕ D (mm)	Terminal plating material	Code
		18th
~10	Sn-Pb	N
	Sn-Bi	G
12.5~	Sn-Pb	N
	Sn100%	S

* Refer to the appendix (Global code) for codes does not listed.

Alchip™ - **MVS** Series

- 4.5mm height
- Endurance : 2,000 hours at 85°C
- Reflow capability
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant




◆ **SPECIFICATIONS**

Items	Characteristics	
Category Temperature Range	-40 to +85°C	
Rated Voltage Range	4 to 50V _{dc}	
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)	
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)	
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	4V 6.3V 10V 16V 25V 35V 50V
	tanδ (Max.)	0.50 0.30 0.24 0.19 0.16 0.14 0.14 (at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	4V 6.3V 10V 16V 25V 35V 50V
	Z(-25°C)/Z(+20°C)	7 4 3 2 2 2 2
	Z(-40°C)/Z(+20°C)	15 8 8 4 4 3 3 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C.	
	Rated voltage	4 & 6.3V _{dc} 10 to 50V _{dc}
	Capacitance change	≤±30% of the initial value ≤±25% of the initial value
	DF (tanδ)	≤300% of the initial specified value ≤300% of the initial specified value
	Leakage current	≤The initial specified value ≤The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.	
	Rated voltage	4 & 6.3V _{dc} 10 to 50V _{dc}
	Capacitance change	≤±30% of the initial value ≤±25% of the initial value
	DF (tanδ)	≤300% of the initial specified value ≤300% of the initial specified value
	Leakage current	≤The initial specified value ≤The initial specified value


◆ **DIMENSIONS [mm]**

● Terminal Code : A

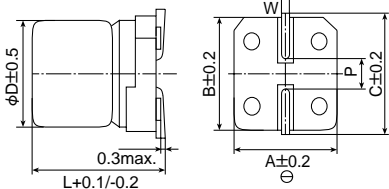

Size code	D	L	A	B	C	W	P
D46	4	4.5	4.3	4.3	5.1	0.5 to 0.8	1.0
E46	5	4.5	5.3	5.3	5.9	0.5 to 0.8	1.4
F46	6.3	4.5	6.6	6.6	7.2	0.5 to 0.8	1.9

◆ **PART NUMBERING SYSTEM**

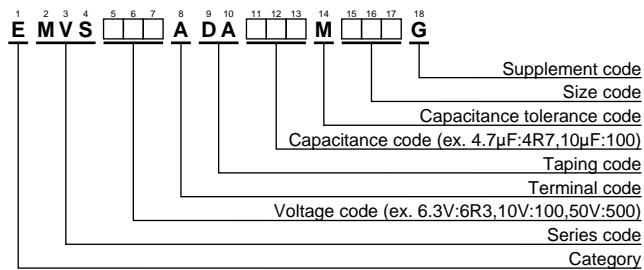

Please refer to "A guide to global code (surface mount type)"

◆ **MARKING**

EX) 16V47μF



◆ **STANDARD RATINGS**


WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{RMS} /85°C, 120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{RMS} /85°C, 120Hz)	Part No.
4	33	D46	0.50	28	EMVS4R0ADA330MD46G	35	4.7	D46	0.14	18	EMVS350ADA4R7MD46G
	47	D46	0.50	33	EMVS4R0ADA470MD46G		10	E46	0.14	29	EMVS350ADA100ME46G
	100	E46	0.50	56	EMVS4R0ADA101ME46G		22	F46	0.14	46	EMVS350ADA220MF46G
	220	F46	0.50	96	EMVS4R0ADA221MF46G		50	0.10	D46	0.14	1.0
6.3	22	D46	0.30	28	EMVS6R3ADA220MD46G	0.22		D46	0.14	2.0	EMVS500ADAR22MD46G
	47	E46	0.30	45	EMVS6R3ADA470ME46G	0.33		D46	0.14	2.8	EMVS500ADAR33MD46G
	100	F46	0.30	70	EMVS6R3ADA101MF46G	0.47		D46	0.14	4.0	EMVS500ADAR47MD46G
10	33	E46	0.24	41	EMVS100ADA330ME46G	1.0		D46	0.14	8.4	EMVS500ADA1R0MD46G
	10	D46	0.19	23	EMVS160ADA100MD46G	2.2		D46	0.14	13	EMVS500ADA2R2MD46G
16	22	E46	0.19	37	EMVS160ADA220ME46G	3.3		D46	0.14	17	EMVS500ADA3R3MD46G
	47	F46	0.19	58	EMVS160ADA470MF46G	4.7		E46	0.14	20	EMVS500ADA4R7ME46G
25	33	F46	0.16	52	EMVS250ADA330MF46G	10	F46	0.14	33	EMVS500ADA100MF46G	

Alchip™-MVA Series

- φ4 through φ18 case sizes are fully lined up
- Endurance : 2,000 hours at 85°C
- Suitable to fit for downsized equipment
- Solvent-proof type except 100 to 450V_{dc} (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

MVA

↓ Downsized
↑ Expanded case size
MV




◆SPECIFICATIONS

Items	Characteristics													
Category Temperature Range	-40 to +85°C													
Rated Voltage Range	4 to 450V _{dc}													
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)													
Leakage Current	Rated voltage (V _{dc})	4 to 100V							160 to 450V					
	D55 to JA0	I=0.01CV or 3μA, whichever is greater.(after 2 minutes)												
	KE0 to MNO	I=0.03CV or 4μA, whichever is greater.(after 1 minute)												
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C)													
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	400 & 450V		
	tanδ (Max.)	D55 to JA0	0.42	0.35	0.30	0.26	0.16	0.14	0.12	0.12	0.12	—	—	
		KE0 to MNO	—	0.38	0.34	0.30	0.26	0.22	0.18	0.14	0.10	0.20	0.25	
When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)														
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	400 & 450V		
	D55 to JA0	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2	2	3	—	—	
		Z(-40°C)/Z(+20°C)	17	10	8	6	4	3	3	3	4	—	—	
	KE0 to MNO	Z(-25°C)/Z(+20°C)	—	5	4	3	2	2	2	2	2	3	6	
Z(-40°C)/Z(+20°C)		—	12	10	8	5	4	3	3	3	6	10		
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C.													
	Size code	D55 to JA0			D55 to JA0				KE0 to MNO					
	Rated voltage (V _{dc})	4V & 6.3V			10 to 100V				6.3 to 450V					
	Capacitance change	≤±30% of the initial value				≤±20% of the initial value								
	DF (tanδ)	≤200% of the initial specified value				≤200% of the initial specified value								
	Leakage current	≤The initial specified value				≤The initial specified value								
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.													
	Size code	D55 to JA0			D55 to JA0				KE0 to MNO					
	Rated voltage	4V & 6.3V			10 to 100V				6.3 to 450V					
	Capacitance change	≤±30% of the initial value				≤±20% of the initial value								
	DF (tanδ)	≤200% of the initial specified value				≤200% of the initial specified value								
	Leakage current	≤The initial specified value				≤The initial specified value								

◆DIMENSIONS [mm]

- Terminal Code : A
- Size code : D55 to MNO

- Terminal Code : G
- Size code : LH0 to MNO

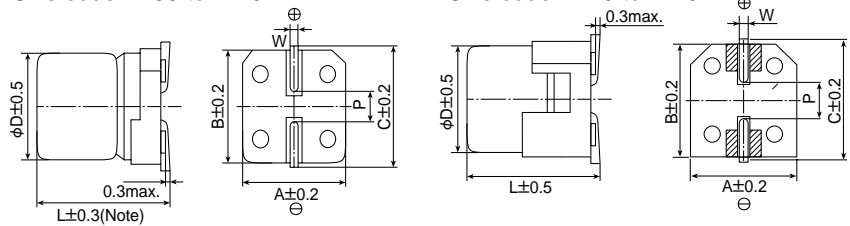


Note : L±0.5 for HA0 to MNO

▨ : Dummy terminals


Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MNO	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

◆PART NUMBERING SYSTEM

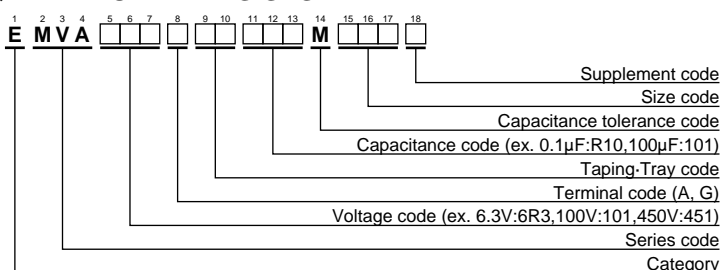

Please refer to "A guide to global code (surface mount type)"

◆MARKING

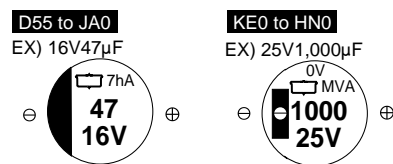



◆STANDARD RATINGS


□ is non solvent-proof.

Table with columns: WV (Vdc), Cap (μF), Size code, tanδ, Rated ripple current (mA rms/85°C, 120Hz), Part No. The table lists various capacitor models and their specifications across multiple rows.

□ : Fill with appropriate terminal code.

Alchip™ - MV Series

- From 5.2L height
- Suitable to fit for downsized equipment
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant




◆ SPECIFICATIONS

Items	Characteristics									
Category	Temperature Range									
Temperature Range	-40 to +85°C									
Rated Voltage Range	4 to 63V _{dc}									
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)									
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)									
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	63V	
	tanδ (Max.)	B55	0.42	0.27	0.23	0.19	0.16	0.14	0.12	—
		D55 to F60	0.42	0.24	0.20	0.16	0.14	0.12	0.10	0.12
H63 to JA0	—	0.40	0.30	0.26	0.16	0.14	0.12	0.12		
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	63V	
	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2	2	
	Z(-40°C)/Z(+20°C)	B55	17	10	8	6	4	3	3	—
		D55 to F60	15	10	8	6	4	3	3	3
H63 to JA0	—	10	8	6	4	3	3	3		
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours (B55 size 1,000 hours) at 85°C.									
	Capacitance change	≤±20% of the initial value								
	D.F. (tanδ)	≤200% of the initial specified value								
	Leakage current	≤The initial specified value								
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 85°C without voltage applied.									
	Case code	B55				D55 to JA0				
	Capacitance change	≤±20% of the initial value				≤±15% of the initial value				
	D.F. (tanδ)	≤200% of the initial specified value				≤150% of the initial specified value				
	Leakage current	≤The initial specified value				≤The initial specified value				

◆ DIMENSIONS [mm]

● Terminal Code : A

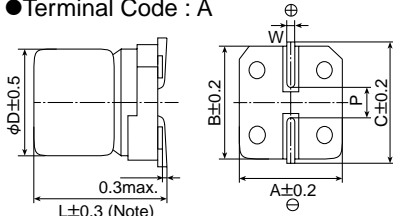


Note : L±0.5 for H63 to JA0


Size code	D	L	A	B	C	W	P
B55	3	5.2	3.3	3.3	3.7	0.45 to 0.75	0.8
D55 & D60	4	*5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55 & E60	5	*5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55 & F60	6.3	*5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

* : L=5.7 for D60, E60 and F60.

◆ MARKING



◆ PART NUMBERING SYSTEM

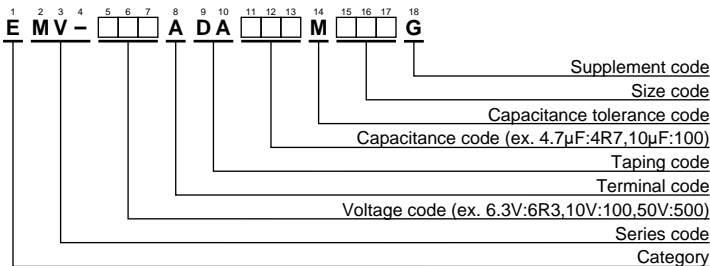

Please refer to "A guide to global code (surface mount type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{RMS} /85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{RMS} /85°C,120Hz)	Part No.
4	22	B55	0.42	14	EMV-4R0ADA220MB55G	50	0.10	B55	0.12	1.0	EMV-500ADAR10MB55G
	33	D55	0.42	23	EMV-4R0ADA330MD55G		0.10	D55	0.10	1.3	EMV-500ADAR10MD55G
	47	D55	0.42	27	EMV-4R0ADA470MD55G		(0.15)	(B55)	(0.12)	(2.0)	EMV-500ADAR15MB55G
	(68)	(E55)	(0.42)	(38)	EMV-4R0ADA680ME55G		(0.15)	(D55)	(0.10)	(2.0)	EMV-500ADAR15MD55G
	100	E55	0.42	46	EMV-4R0ADA101ME55G		0.22	B55	0.12	2.0	EMV-500ADAR22MB55G
220	F55	0.42	74	EMV-4R0ADA221MF55G	0.22		D55	0.10	2.9	EMV-500ADAR22MD55G	
6.3	(15)	(B55)	(0.27)	(14.5)	EMV-6R3ADA150MB55G		0.33	B55	0.12	3.0	EMV-500ADAR33MB55G
	22	B55	0.27	17.5	EMV-6R3ADA220MB55G		0.33	D55	0.10	3.5	EMV-500ADAR33MD55G
	22	D55	0.24	23	EMV-6R3ADA220MD55G		0.47	B55	0.12	3.8	EMV-500ADAR47MB55G
	47	E55	0.24	38	EMV-6R3ADA470ME55G		0.47	D55	0.10	4.2	EMV-500ADAR47MD55G
	100	F55	0.24	60	EMV-6R3ADA101MF55G		(0.68)	(B55)	(0.12)	(4.6)	EMV-500ADAR68MB55G
	330	H63	0.40	190	EMV-6R3ADA331MH63G		(0.68)	(D55)	(0.10)	(5.1)	EMV-500ADAR68MD55G
10	470	HA0	0.40	265	EMV-6R3ADA471MHA0G		1.0	B55	0.12	5.6	EMV-500ADA1R0MB55G
	1,000	JA0	0.40	400	EMV-6R3ADA102MJA0G		1.0	D55	0.10	6.2	EMV-500ADA1R0MD55G
	10	B55	0.23	12.8	EMV-100ADA100MB55G		(1.5)	(B55)	(0.12)	(6.9)	EMV-500ADA1R5MB55G
	(15)	(D55)	(0.20)	(20)	EMV-100ADA150MD55G	(1.5)	(D55)	(0.10)	(7.5)	EMV-500ADA1R5MD55G	
	33	E55	0.20	35	EMV-100ADA330ME55G	2.2	B55	0.12	8.3	EMV-500ADA2R2MB55G	
	(68)	(F55)	(0.20)	(54)	EMV-100ADA330ME55G	2.2	D55	0.10	10	EMV-500ADA2R2MD55G	
16	100	F60	0.20	70	EMV-100ADA101MF60G	3.3	D55	0.10	14	EMV-500ADA3R3MD55G	
	220	H63	0.30	175	EMV-100ADA221MH63G	4.7	E55	0.10	19	EMV-500ADA4R7ME55G	
	(6.8)	(B55)	(0.19)	(11.6)	EMV-160ADA6R8MB55G	(6.8)	(F55)	(0.10)	(24)	EMV-500ADA6R8MF55G	
	10	B55	0.19	14	EMV-160ADA100MB55G	10	F55	0.10	29	EMV-500ADA100MF55G	
	10	D55	0.16	17	EMV-160ADA100MD55G	(15)	(F60)	(0.10)	(32)	EMV-500ADA150MF60G	
	(15)	(E55)	(0.16)	(26)	EMV-160ADA150ME55G	22	F60	0.10	45	EMV-500ADA220MF60G	
	22	E55	0.16	32	EMV-160ADA220ME55G	33	H63	0.12	95	EMV-500ADA330MH63G	
	47	F55	0.16	50	EMV-160ADA470MF55G	47	HA0	0.12	140	EMV-500ADA470MHA0G	
	(68)	(F60)	(0.16)	(78)	EMV-160ADA680MF60G	(68)	(JA0)	(0.12)	(170)	EMV-500ADA680MJA0G	
	220	HA0	0.26	215	EMV-160ADA221MHA0G	100	JA0	0.12	195	EMV-500ADA101MJA0G	
25	330	HA0	0.26	270	EMV-160ADA331MHA0G	63	0.10	D55	0.12	1.3	EMV-630ADAR10MD55G
	470	JA0	0.26	330	EMV-160ADA471MJA0G		(0.15)	(D55)	(0.12)	(2.0)	EMV-630ADAR15MD55G
	4.7	B55	0.16	10.5	EMV-250ADA4R7MB55G		0.22	D55	0.12	2.9	EMV-630ADAR22MD55G
	(6.8)	(D55)	(0.14)	(16)	EMV-250ADA6R8MD55G		0.33	D55	0.12	3.5	EMV-630ADAR33MD55G
	33	F55	0.14	45	EMV-250ADA330MF55G		0.47	D55	0.12	4.2	EMV-630ADAR47MD55G
	47	F60	0.14	65	EMV-250ADA470MF60G		(0.68)	(D55)	(0.12)	(5.1)	EMV-630ADAR68MD55G
35	(68)	(H63)	(0.16)	(115)	EMV-250ADA680MH63G		1.0	D60	0.12	7.0	EMV-630ADA1R0MD60G
	100	H63	0.16	145	EMV-250ADA101MH63G		(1.5)	(D60)	(0.12)	(8.4)	EMV-630ADA1R5MD60G
	330	JA0	0.16	305	EMV-250ADA331MJA0G		2.2	D60	0.12	10	EMV-630ADA2R2MD60G
	2.2	B55	0.14	7.7	EMV-350ADA2R2MB55G		3.3	E60	0.12	13	EMV-630ADA3R3ME60G
	3.3	B55	0.14	9.4	EMV-350ADA3R3MB55G		4.7	F60	0.12	18.5	EMV-630ADA4R7MF60G
4.7	D55	0.12	15	EMV-350ADA4R7MD55G	(6.8)		(F60)	(0.12)	(21)	EMV-630ADA6R8MF60G	
35	(6.8)	(E55)	(0.12)	(20)	EMV-350ADA6R8ME55G		10	HA0	0.12	46	EMV-630ADA100MHA0G
	10	E55	0.12	25	EMV-350ADA100ME55G		(15)	(HA0)	(0.12)	(52)	EMV-630ADA150MHA0G
	(15)	(F55)	(0.12)	(33)	EMV-350ADA150MF55G		22	HA0	0.12	69	EMV-630ADA220MHA0G
	22	F55	0.12	40	EMV-350ADA220MF55G	33	HA0	0.12	85	EMV-630ADA330MHA0G	
	33	F60	0.12	55	EMV-350ADA330MF60G	47	HA0	0.12	101	EMV-630ADA470MHA0G	
	47	H63	0.14	105	EMV-350ADA470MH63G	(68)	(JA0)	(0.12)	(125)	EMV-630ADA680MJA0G	
	(68)	(HA0)	(0.14)	(157)	EMV-350ADA680MHA0G						
	100	HA0	0.14	175	EMV-350ADA101MHA0G						
	220	JA0	0.14	265	EMV-350ADA221MJA0G						

() : Second standard

Alchip™ - MVE Series

- Rated voltage range : 6.3 to 450V, capacitance range : 0.47 to 6,800μF
- Endurance : 1,000 to 2,000 hours at 105°C
- Case size range : φ4×5.2L to φ18×21.5L
- Solvent-proof type except 100 to 450V_{dc} (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

MVE

↓
Downsized
Expanded case size
↑
MVK




◆ **SPECIFICATIONS**

Items	Characteristics												
Category Temperature Range	-40 to +105°C												
Rated Voltage Range	6.3 to 450V _{dc}												
Capacitance Tolerance	±20%(M) (20°C, 120Hz)												
Leakage Current	Rated voltage(V _{dc})	6.3 to 100V						160 to 450V					
	D55 to JA0	I=0.01CV or 3μA, whichever is greater (2 minutes)						—					
	KE0 to MN0	I=0.03CV or 4μA, whichever is greater (1 minute)						I=0.04CV+100μA (1minute)					
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (20°C)												
Dissipation Factor (tanδ)	See STANDARD RATINGS (20°C, 120Hz)												
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	400 to 450V		
		Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	2	3	—	—	
	D55 to JA0	Z(-40°C)/Z(+20°C)	12	8	6	4	3	3	3	4	—	—	
		KE0 to MN0	Z(-25°C)/Z(+20°C)	5	4	3	2	2	2	2	2	3	6
Z(-40°C)/Z(+20°C)	10		8	6	4	3	3	3	3	6	10	(120Hz)	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for the specified period of time at 105°C.												
	Size code	D55 to F80					HA0 to MN0						
	Time	1,000 hours					2,000 hours						
	Capacitance change	≤±30% of the initial value					≤±20% of the initial value						
	D.F. (tanδ)	≤300% of the initial specified value					≤200% of the initial specified value						
	Leakage current	≤The initial specified value					≤The initial specified value						
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours (500 hours for B55 to F80 size) at 105°C without voltage applied.												
	Size code	D55 to F80					HA0 to MN0						
	Capacitance change	≤±25% of the initial value					≤±20% of the initial value						
	D.F. (tanδ)	≤200% of the initial specified value					≤200% of the initial specified value						
	Leakage current	≤The initial specified value					≤The initial specified value						

◆ **DIMENSIONS [mm]**

- Terminal Code : A
- Size code : D55 to MN0

- Terminal Code : G
- Size code : LH0 to MN0

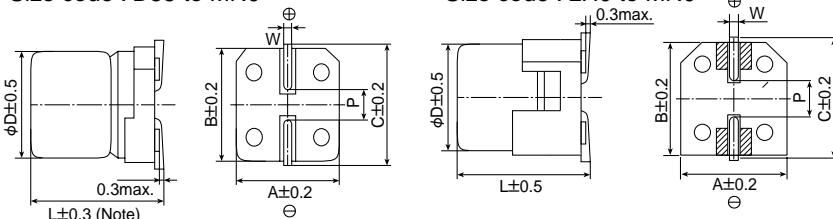


Note : L±0.5 for HA0 to MN0

▨ : Dummy terminals


Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MN0	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

◆ **PART NUMBERING SYSTEM**

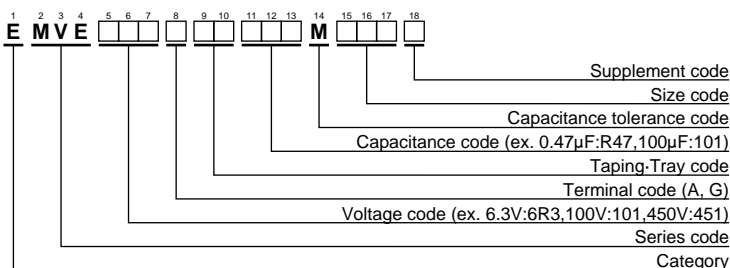

Please refer to "A guide to global code (surface mount type)"

◆ **MARKING**

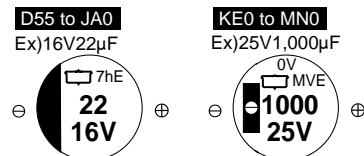



Alchip™-MVE Series

◆STANDARD RATINGS



□ is non solvent-proof.

Table with columns: WV (Vdc), Cap (µF), Size code, tanδ, Rated ripple current (mA/105°C, 120Hz), Part No. The table is divided into two main sections, each containing multiple rows for different voltage ratings (6.3V, 10V, 16V, 25V, 35V, 35V, 50V, 63V, 100V, 160V, 200V, 250V, 400V, 450V).

□ : Fill with appropriate terminal code.

Alchip™ - MVK Series

- Endurance : 1,000 to 2,000 hours at 105°C
- Suitable to fit for downsized equipment
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant




◆ **SPECIFICATIONS**

Items	Characteristics						
Category Temperature Range	-40 to +105°C						
Rated Voltage Range	6.3 to 50V _{dc}						
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)						
Leakage Current	I = 0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)						
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V
	tanδ (Max.)	D55 to F55	0.30	0.24	0.20	0.16	0.14
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2
	Z(-40°C)/Z(+20°C)	10	8	6	4	3	3
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for the specified period of time at 105°C.						
	Case code	D55 to F55			H63 to JA0		
	Time	1,000hours			2,000hours		
	Capacitance change	≤±30% of the initial value			≤±20% of the initial value		
	D.F. (tanδ)	≤300% of the initial specified value			≤200% of the initial specified value		
	Leakage current	≤The initial specified value			≤The initial specified value		
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for the specified time at 105°C without voltage applied.						
	Case code	D55 to F55			H63 to JA0		
	Time	500hours			1,000hours		
	Capacitance change	≤±25% of the initial value			≤±20% of the initial value		
	D.F. (tanδ)	≤200% of the initial specified value			≤200% of the initial specified value		
	Leakage current	≤The initial specified value			≤The initial specified value		

◆ **DIMENSIONS [mm]**

● Terminal Code : A

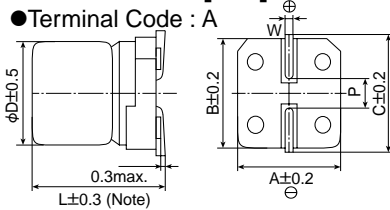

Note : L±0.5 for H63 to JA0


Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

◆ **MARKING**

EX) 6.3V100μF



◆ **PART NUMBERING SYSTEM**

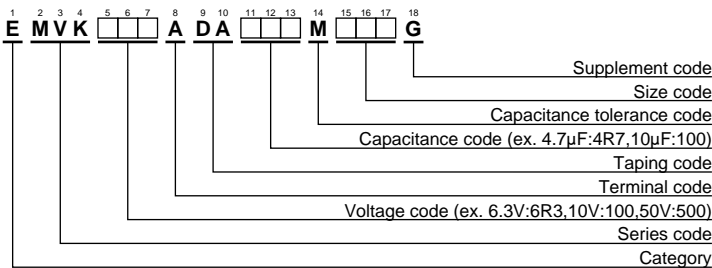

Please refer to "A guide to global code (surface mount type)"



◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case code	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case code	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.
6.3	22	D55	0.30	21	EMVK6R3ADA220MD55G	35	10	E55	0.14	25	EMVK350ADA100ME55G
	47	E55	0.30	36	EMVK6R3ADA470ME55G		22	F55	0.14	40	EMVK350ADA220MF55G
	100	F55	0.30	56	EMVK6R3ADA101MF55G		33	H63	0.14	80	EMVK350ADA330MH63G
	330	HA0	0.40	290	EMVK6R3ADA331MHA0G		220	JA0	0.14	375	EMVK350ADA221MJA0G
	1,000	JA0	0.40	410	EMVK6R3ADA102MJA0G		50	0.10	D55	0.12	1.3
10	33	E55	0.24	34	EMVK100ADA330ME55G	0.22		D55	0.12	2.6	EMVK500ADAR22MD55G
	100	H63	0.30	90	EMVK100ADA101MH63G	0.33		D55	0.12	3.2	EMVK500ADAR33MD55G
	220	HA0	0.30	180	EMVK100ADA221MHA0G	0.47		D55	0.12	3.8	EMVK500ADAR47MD55G
16	10	D55	0.20	16	EMVK160ADA100MD55G	1.0		D55	0.12	5.6	EMVK500ADA1R0MD55G
	22	E55	0.20	30	EMVK160ADA220ME55G	2.2		D55	0.12	10	EMVK500ADA2R2MD55G
	47	F55	0.20	48	EMVK160ADA470MF55G	3.3		D55	0.12	14	EMVK500ADA3R3MD55G
	470	JA0	0.26	460	EMVK160ADA471MJA0G	4.7		E55	0.12	19	EMVK500ADA4R7ME55G
25	33	F55	0.16	45	EMVK250ADA330MF55G	10		F55	0.12	29	EMVK500ADA100MF55G
	47	H63	0.16	80	EMVK250ADA470MH63G	22		H63	0.12	70	EMVK500ADA220MH63G
	100	HA0	0.16	180	EMVK250ADA101MHA0G	33		HA0	0.12	140	EMVK500ADA330MHA0G
	330	JA0	0.16	450	EMVK250ADA331MJA0G	47		HA0	0.12	170	EMVK500ADA470MHA0G
35	4.7	D55	0.14	15	EMVK350ADA4R7MD55G	100		JA0	0.12	310	EMVK500ADA101MJA0G

Alchip™-**MKA**Series

- Endurance : 1,000 to 2,000 hours at 105°C
- Rated voltage : 6.3V to 50V, Nominal capacitance : 0.1 to 1,000μF
- Case sizes : φ4×5.2L to φ10×10.0L
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

MKA

↑ Higher reflow temp.
MVK




◆SPECIFICATIONS

Items	Characteristics							
Category	-40 to +105°C							
Temperature Range								
Capacitance Tolerance	±20%(M)							(at 20°C, 120Hz)
Leakage Current	I=0.01CV or 3μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C, 2 minute)							
Dissipation Factor (tanδ)	Rated voltage(V _{dc})	6.3V	10V	16V	25V	35V	50V	
	tanδ(Max.)	D55 to F55	0.30	0.24	0.20	0.16	0.14	
		F80 to JA0	0.40	0.30	0.26	0.16	0.14	0.12
								(20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage(V _{dc})	6.3	10	16	25	35	50	
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	
	Z(-40°C)/Z(+20°C)	10	8	6	4	3	3	(120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for the specified period of time at 105°C.							
	Size code	D55 to F55			F80 to JA0			
	Time	1,000 hours			2,000 hours			
	Capacitance change	≤±30% of the initial measured value			≤±20% of the initial measured value			
	D.F. (tanδ)	≤300% of the initial specified value			≤200% of the initial specified value			
	Leakage current	≤The initial specified value			≤The initial specified value			

◆DIMENSIONS [mm]

●Terminal Code : A

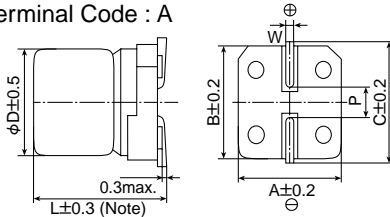

Note : L±0.5 for H63 to JA0


Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

◆MARKING

EX) 16V100μF



◆PART NUMBERING SYSTEM

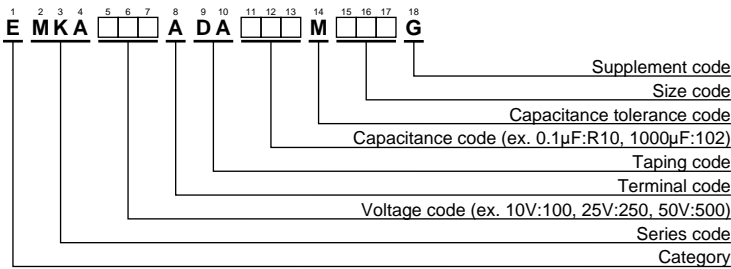

Please refer to "A guide to global code (surface mount type)"

◆RATED VOLTAGE SYMBOL

Rated voltage (V _{dc})	Symbol
6.3	j
10	A
16	C
25	E
35	V
50	H


◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.
6.3	22	D55	0.30	21	EMKA6R3ADA220MD55G	35	10	E55	0.14	25	EMKA350ADA100ME55G
	47	E55	0.30	36	EMKA6R3ADA470ME55G		22	F55	0.14	40	EMKA350ADA220MF55G
	100	F55	0.30	56	EMKA6R3ADA101MF55G		33	F80	0.14	80	EMKA350ADA330MF80G
	330	HA0	0.40	290	EMKA6R3ADA331MHA0G		(33)	(H63)	(0.14)	(80)	EMKA350ADA330MH63G
	1,000	JA0	0.40	410	EMKA6R3ADA102MJA0G		220	JA0	0.14	375	EMKA350ADA221MJA0G
10	33	E55	0.24	34	EMKA100ADA330ME55G	50	0.10	D55	0.12	1.3	EMKA500ADAR10MD55G
	100	F80	0.30	90	EMKA100ADA101MF80G		0.22	D55	0.12	2.6	EMKA500ADAR22MD55G
	(100)	(H63)	(0.30)	(90)	EMKA100ADA101MH63G		0.33	D55	0.12	3.2	EMKA500ADAR33MD55G
	220	HA0	0.30	180	EMKA100ADA221MHA0G		0.47	D55	0.12	3.8	EMKA500ADAR47MD55G
16	10	D55	0.20	16	EMKA160ADA100MD55G		1.0	D55	0.12	5.6	EMKA500ADA1R0MD55G
	22	E55	0.20	30	EMKA160ADA220ME55G		2.2	D55	0.12	10	EMKA500ADA2R2MD55G
	47	F55	0.20	48	EMKA160ADA470MF55G		3.3	D55	0.12	14	EMKA500ADA3R3MD55G
	470	JA0	0.26	460	EMKA160ADA471MJA0G		4.7	E55	0.12	19	EMKA500ADA4R7ME55G
25	33	F55	0.16	45	EMKA250ADA330MF55G		10	F55	0.12	29	EMKA500ADA100MF55G
	47	F80	0.16	80	EMKA250ADA470MF80G		22	F80	0.12	70	EMKA500ADA220MF80G
	(47)	(H63)	(0.16)	(80)	EMKA250ADA470MH63G		(22)	(H63)	(0.12)	(70)	EMKA500ADA220MH63G
	100	HA0	0.16	180	EMKA250ADA101MHA0G		33	HA0	0.12	140	EMKA500ADA330MHA0G
35	330	JA0	0.16	450	EMKA250ADA331MJA0G		47	HA0	0.12	170	EMKA500ADA470MHA0G
	4.7	D55	0.14	15	EMKA350ADA4R7MD55G		100	JA0	0.12	310	EMKA500ADA101MJA0G

() : Second standard

Alchip™-MZA Series

- Lowest impedance, 105°C 2,000 hour-life
- 63V, 80V newly added
- Solvent-proof type
- RoHS Compliant




◆ SPECIFICATIONS

Items	Characteristics								
Category	-55 to +105°C								
Temperature Range									
Rated Voltage Range	6.3 to 80V _{dc}								
Capacitance Tolerance	±20%(M) (20°C, 120Hz)								
Leakage Current	I=0.01CV or 3μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)								
Dissipation Factor (tanδ)	Rated voltage(V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V
	tanδ (Max.)	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.08
Low Temperature Characteristics (Max. impedance Ratio)	Rated voltage(V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V
	Z(-25°C)/Z(+20°C)	2	2	2	2	2	2	2	2
	Z(-40°C)/Z(+20°C)	3	3	3	3	3	3	3	3
	Z(-55°C)/Z(+20°C)	4	4	4	4	3	3	3	3
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 105°C.								
	Capacitance change	≤±30% of the initial measured value							
	D.F. (tanδ)	≤200% of the initial specified value							
	Leakage current	≤The initial specified value							

◆ DIMENSIONS [mm]

● Terminal Code : A

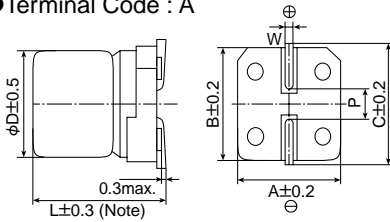

Note : L±0.5 for HA0 and JA0


Size code	D	L	A	B	C	W	P
D61	4	5.8	4.3	4.3	5.1	0.5 to 0.8	1.0
E61	5	5.8	5.3	5.3	5.9	0.5 to 0.8	1.4
F61	6.3	5.8	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

◆ MARKING

EX) 16V220μF



◆ PART NUMBERING SYSTEM

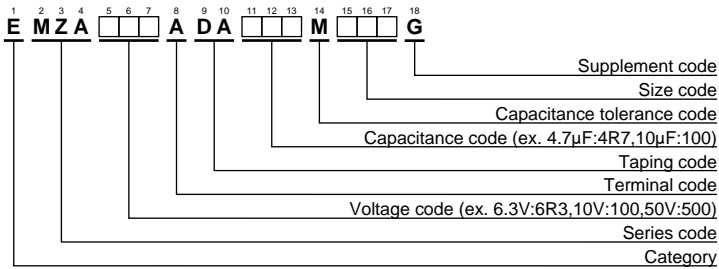

Please refer to "A guide to global code (surface mount type)"

◆ RATED VOLTAGE SYMBOL


Rated voltage (V _{dc})	Symbol
6.3	j
10	A
16	C
25	E
35	V
50	H
63	J
80	K

◆STANDARD RATINGS

WV(Vdc)	Cap(μF)	Case code	tanδ	Impedance ($\Omega_{max/20^\circ C, 100kHz}$)	Rated ripple current (mArms/105°C, 100kHz)	Part No.
6.3	22	D61	0.26	1.35	90	EMZA6R3ADA220MD61G
	47	D61	0.26	1.35	90	EMZA6R3ADA470MD61G
	47	E61	0.26	0.70	160	EMZA6R3ADA470ME61G
	100	E61	0.26	0.70	160	EMZA6R3ADA101ME61G
	100	F61	0.26	0.36	240	EMZA6R3ADA101MF61G
	220	F61	0.26	0.36	240	EMZA6R3ADA221MF61G
	330	F80	0.26	0.34	280	EMZA6R3ADA331MF80G
	470	HA0	0.26	0.16	600	EMZA6R3ADA471MHA0G
	1,000	HA0	0.26	0.16	600	EMZA6R3ADA102MHA0G
1,500	JA0	0.26	0.08	850	EMZA6R3ADA152MJA0G	
10	22	D61	0.19	1.35	90	EMZA100ADA220MD61G
	33	D61	0.19	1.35	90	EMZA100ADA330MD61G
	33	E61	0.19	0.70	160	EMZA100ADA330ME61G
	220	F80	0.19	0.34	280	EMZA100ADA221MF80G
	330	HA0	0.19	0.16	600	EMZA100ADA331MHA0G
	470	HA0	0.19	0.16	600	EMZA100ADA471MHA0G
	680	HA0	0.19	0.16	600	EMZA100ADA681MHA0G
	1,000	JA0	0.19	0.08	850	EMZA100ADA102MJA0G
16	10	D61	0.16	1.35	90	EMZA160ADA100MD61G
	22	D61	0.16	1.35	90	EMZA160ADA220MD61G
	22	E61	0.16	0.70	160	EMZA160ADA220ME61G
	47	E61	0.16	0.70	160	EMZA160ADA470ME61G
	47	F61	0.16	0.36	240	EMZA160ADA470MF61G
	100	F61	0.16	0.36	240	EMZA160ADA101MF61G
	220	F80	0.16	0.34	280	EMZA160ADA221MF80G
	330	HA0	0.16	0.16	600	EMZA160ADA331MHA0G
	470	HA0	0.16	0.16	600	EMZA160ADA471MHA0G
	680	JA0	0.16	0.08	850	EMZA160ADA681MJA0G
25	10	D61	0.14	1.35	90	EMZA250ADA100MD61G
	22	E61	0.14	0.70	160	EMZA250ADA220ME61G
	33	E61	0.14	0.70	160	EMZA250ADA330ME61G
	33	F61	0.14	0.36	240	EMZA250ADA330MF61G
	47	F61	0.14	0.36	240	EMZA250ADA470MF61G
	100	F80	0.14	0.34	280	EMZA250ADA101MF80G
	220	HA0	0.14	0.16	600	EMZA250ADA221MHA0G
	330	HA0	0.14	0.16	600	EMZA250ADA331MHA0G
	470	JA0	0.14	0.08	850	EMZA250ADA471MJA0G
35	4.7	D61	0.12	1.35	90	EMZA350ADA4R7MD61G
	10	D61	0.12	1.35	90	EMZA350ADA100MD61G
	10	E61	0.12	0.70	160	EMZA350ADA100ME61G
	22	E61	0.12	0.70	160	EMZA350ADA220ME61G
	33	F61	0.12	0.36	240	EMZA350ADA330MF61G
	47	F61	0.12	0.36	240	EMZA350ADA470MF61G
	100	F80	0.12	0.34	280	EMZA350ADA101MF80G
	100	HA0	0.12	0.16	600	EMZA350ADA101MHA0G
	220	HA0	0.12	0.16	600	EMZA350ADA221MHA0G
	330	JA0	0.12	0.08	850	EMZA350ADA331MJA0G
50	4.7	D61	0.10	2.90	60	EMZA500ADA4R7MD61G
	10	E61	0.10	1.52	85	EMZA500ADA100ME61G
	10	F61	0.10	0.88	165	EMZA500ADA100MF61G
	22	F61	0.10	0.88	165	EMZA500ADA220MF61G
	33	F80	0.10	0.68	195	EMZA500ADA330MF80G
	47	F80	0.10	0.68	195	EMZA500ADA470MF80G
	100	HA0	0.10	0.34	350	EMZA500ADA101MHA0G
	220	JA0	0.10	0.18	670	EMZA500ADA221MJA0G
63	4.7	E61	0.08	4.8	50	EMZA630ADA4R7ME61G
	10	F61	0.08	2.2	80	EMZA630ADA100MF61G
	22	F80	0.08	2.1	120	EMZA630ADA220MF80G
	33	HA0	0.08	0.70	250	EMZA630ADA330MHA0G
	47	HA0	0.08	0.70	250	EMZA630ADA470MHA0G
	68	HA0	0.08	0.70	250	EMZA630ADA680MHA0G
	100	JA0	0.08	0.45	400	EMZA630ADA101MJA0G
80	3.3	E61	0.08	5.0	25	EMZA800ADA3R3ME61G
	4.7	F61	0.08	3.0	40	EMZA800ADA4R7MF61G
	10	F80	0.08	2.4	60	EMZA800ADA100MF80G
	22	HA0	0.08	1.3	130	EMZA800ADA220MHA0G
	33	HA0	0.08	1.3	130	EMZA800ADA330MHA0G
	47	JA0	0.08	0.70	200	EMZA800ADA470MJA0G

Alchip™-MVY Series

- Endurance : 1,000 to 5,000 hours at 105°C
- Low impedance
- For digital equipment, especially DC-DC converters
- Solvent-proof type except 80 & 100V_{dc} (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant




SPECIFICATIONS

Items	Characteristics	
Category	-55 to +105°C (6.3 to 63V _{dc}) -40 to +105°C (80 & 100V _{dc})	
Temperature Range		
Rated Voltage Range	6.3 to 100V _{dc}	
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)	
Leakage Current	I ≤ 0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)	
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V 10V 16V 25V 35V 50V 63V 80V 100V
	tanδ (Max.)	D55 to F80 0.24 0.20 0.16 0.14 0.12 0.12 — — — HA0 & JA0 0.28 0.24 0.20 0.16 0.14 0.12 — — — KE0 to MN0 0.26 0.22 0.18 0.16 0.14 0.12 0.14 0.10 0.10
	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V 10V 16V 25V 35V 50V 63V 80V 100V
	Z(-40°C)/Z(+20°C)	D55 to JA0 3 2 2 2 2 2 — — — KE0 to MN0 10 8 6 4 3 3 3 3 3
	(at 120Hz)	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for specified time at 105°C.	
	Time	D55 to F80 : 1,000 hours HA0 & JA0 : 2,000 hours KE0 to MN0 : 5,000 hours
	Rated voltage	6.3V _{dc} (D55 to JA0) 6.3 to 100V _{dc}
	Capacitance change	≤ ±30% of the initial value ≤ ±20% of the initial value
	D.F. (tanδ)	≤ 300% of the initial specified value ≤ 200% of the initial specified value
	Leakage current	≤ The initial specified value ≤ The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.	
	Rated voltage	6.3V _{dc} (D55 to JA0) 6.3 to 100V _{dc}
	Capacitance change	≤ ±30% of the initial value ≤ ±20% of the initial value
	D.F. (tanδ)	≤ 300% of the initial specified value ≤ 200% of the initial specified value
	Leakage current	≤ The initial specified value ≤ The initial specified value


DIMENSIONS [mm]

- Terminal Code : A
- Size code : D55 to MN0
- Terminal Code : G
- Size code : LH0 to MN0

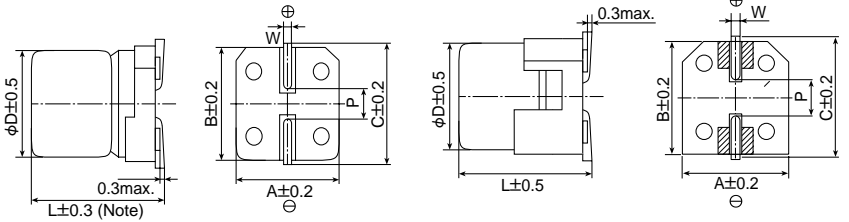


Size code	φD	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MN0	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

PART NUMBERING SYSTEM

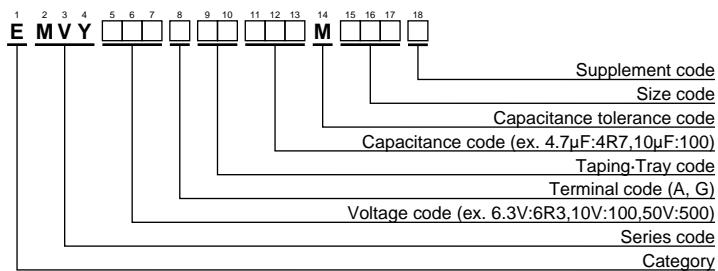

MARKING

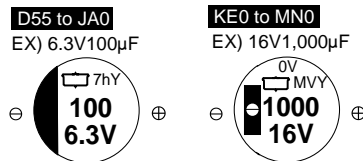

Please refer to "A guide to global code (surface mount type)"



Alchip™-MVY Series

◆STANDARD RATINGS

□ is non solvent-proof (80/100V_{dc}).

WV (V _{dc})	Cap (μF)	Size code	Impedance (Ω _{max} /20°C, 100kHz)	Rated ripple current (mA _{rms} /105°C, 100kHz)	Part No.	WV (V _{dc})	Cap (μF)	Size code	Impedance (Ω _{max} /20°C, 100kHz)	Rated ripple current (mA _{rms} /105°C, 100kHz)	Part No.		
6.3	22	D55	3.0	60	EMVY6R3ADA220MD55G	25	330	HA0	0.30	450	EMVY250ADA331MHA0G		
	33	E55	1.8	95	EMVY6R3ADA330ME55G		470	JA0	0.15	670	EMVY250ADA471MJA0G		
	47	E55	1.8	95	EMVY6R3ADA470ME55G		1,000	LH0	0.054	1,260	EMVY250□DA102MLH0S		
	100	F55	1.0	140	EMVY6R3ADA101MF55G		1,000	MH0	0.054	1,350	EMVY250□DA102MMH0S		
	220	F55	1.0	140	EMVY6R3ADA221MF55G		2,200	LN0	0.038	1,630	EMVY250□DA222MLN0S		
	330	F80	0.34	280	EMVY6R3ADA331MF80G		2,200	MN0	0.038	1,750	EMVY250□DA222MMN0S		
	470	HA0	0.30	450	EMVY6R3ADA471MHA0G		3,300	MN0	0.038	1,750	EMVY250□DA332MMN0S		
	680	HA0	0.30	450	EMVY6R3ADA681MHA0G		35	4.7	D55	3.0	60	EMVY350ADA4R7MD55G	
	1,000	HA0	0.30	450	EMVY6R3ADA102MHA0G			10	E55	1.8	95	EMVY350ADA100ME55G	
	1,500	JA0	0.15	670	EMVY6R3ADA152MJA0G			22	F55	1.0	140	EMVY350ADA220MF55G	
	2,200	KE0	0.070	820	EMVY6R3ARA222MKE0S			33	F55	1.0	140	EMVY350ADA330MF55G	
	2,200	LH0	0.054	1,260	EMVY6R3□DA222MLH0S			47	F55	1.0	140	EMVY350ADA470MF55G	
	3,300	KG5	0.060	950	EMVY6R3ARA332MKG5S			68	F80	0.34	280	EMVY350ADA680MF80G	
	3,300	MH0	0.054	1,350	EMVY6R3□DA332MMH0S			100	HA0	0.30	450	EMVY350ADA101MHA0G	
	4,700	LN0	0.038	1,630	EMVY6R3□DA472MLN0S			220	HA0	0.30	450	EMVY350ADA221MHA0G	
	4,700	MH0	0.054	1,350	EMVY6R3□DA472MMH0S			330	JA0	0.15	670	EMVY350ADA331MJA0G	
6,800	LN0	0.038	1,630	EMVY6R3□DA682MLN0S	470	KE0		0.070	820	EMVY350ARA471MKE0S			
6,800	MN0	0.038	1,750	EMVY6R3□DA682MMN0S	470	LH0		0.054	1,260	EMVY350□DA471MLH0S			
8,200	MN0	0.038	1,750	EMVY6R3□DA822MMN0S	1,000	LH0		0.054	1,260	EMVY350□DA102MLH0S			
10	22	E55	1.8	95	EMVY100ADA220ME55G	1,000		MH0	0.054	1,350	EMVY350□DA102MMH0S		
	33	E55	1.8	95	EMVY100ADA330ME55G	2,200		MN0	0.038	1,750	EMVY350□DA222MMN0S		
	47	F55	1.0	140	EMVY100ADA470MF55G	50		1.0	D55	5.0	30	EMVY500ADA1R0MD55G	
	100	F55	1.0	140	EMVY100ADA101MF55G			2.2	D55	5.0	30	EMVY500ADA2R2MD55G	
	220	F80	0.34	280	EMVY100ADA221MF80G		3.3	D55	5.0	30	EMVY500ADA3R3MD55G		
	330	HA0	0.30	450	EMVY100ADA331MHA0G		4.7	E55	3.0	50	EMVY500ADA4R7ME55G		
	470	HA0	0.30	450	EMVY100ADA471MHA0G		10	F55	2.0	70	EMVY500ADA100MF55G		
	680	JA0	0.15	670	EMVY100ADA681MJA0G		22	F55	2.0	70	EMVY500ADA220MF55G		
	1,000	JA0	0.15	670	EMVY100ADA102MJA0G		33	F80	0.60	170	EMVY500ADA330MF80G		
	2,200	KG5	0.060	950	EMVY100ARA222MKG5S		47	F80	0.60	170	EMVY500ADA470MF80G		
	2,200	LH0	0.054	1,260	EMVY100□DA222MLH0S		68	HA0	0.60	300	EMVY500ADA680MHA0G		
	3,300	LH0	0.054	1,260	EMVY100□DA332MLH0S		100	HA0	0.60	300	EMVY500ADA101MHA0G		
	3,300	MH0	0.054	1,350	EMVY100□DA332MMH0S		220	JA0	0.30	500	EMVY500ADA221MJA0G		
	4,700	LN0	0.038	1,630	EMVY100□DA472MLN0S		330	KE0	0.11	650	EMVY500ARA331MKE0S		
	4,700	MN0	0.038	1,750	EMVY100□DA472MMN0S		330	LH0	0.087	900	EMVY500□DA331MLH0S		
	6,800	MN0	0.038	1,750	EMVY100□DA682MMN0S		470	LH0	0.087	900	EMVY500□DA471MLH0S		
16	10	D55	3.0	60	EMVY160ADA100MD55G		470	MH0	0.087	1,060	EMVY500□DA471MMH0S		
	22	E55	1.8	95	EMVY160ADA220ME55G		1,000	MN0	0.050	1,520	EMVY500□DA102MMN0S		
	33	F55	1.0	140	EMVY160ADA330MF55G	63	68	KE0	0.19	500	EMVY630ARA680MKE0S		
	47	F55	1.0	140	EMVY160ADA470MF55G		100	KE0	0.19	500	EMVY630ARA101MKE0S		
	100	F55	1.0	140	EMVY160ADA101MF55G		220	KE0	0.19	500	EMVY630ARA221MKE0S		
	220	F80	0.34	280	EMVY160ADA221MF80G		220	LH0	0.12	845	EMVY630□DA221MLH0S		
	330	HA0	0.30	450	EMVY160ADA331MHA0G		330	LH0	0.12	845	EMVY630□DA331MLH0S		
	470	HA0	0.30	450	EMVY160ADA471MHA0G		330	MH0	0.12	905	EMVY630□DA331MMH0S		
	680	JA0	0.15	670	EMVY160ADA681MJA0G		470	LN0	0.085	1,100	EMVY630□DA471MLN0S		
	1,000	KE0	0.070	820	EMVY160ARA102MKE0S		470	MH0	0.12	905	EMVY630□DA471MMH0S		
	1,000	LH0	0.054	1,260	EMVY160□DA102MLH0S		80	100	KE0	0.33	450	EMVY800ARA101MKE0S	
	2,200	LH0	0.054	1,260	EMVY160□DA222MLH0S			220	KG5	0.26	550	EMVY800ARA221MKG5S	
	2,200	MH0	0.054	1,350	EMVY160□DA222MMH0S			330	LN0	0.16	900	EMVY800□DA331MLN0S	
	3,300	LN0	0.038	1,630	EMVY160□DA332MLN0S			330	MH0	0.24	700	EMVY800□DA331MMH0S	
	3,300	MH0	0.054	1,350	EMVY160□DA332MMH0S			470	MN0	0.16	950	EMVY800□DA471MMN0S	
	4,700	MN0	0.038	1,750	EMVY160□DA472MMN0S			100	47	KE0	0.33	450	EMVY101ARA470MKE0S
25	10	E55	1.8	95	EMVY250ADA100ME55G				68	KE0	0.33	450	EMVY101ARA680MKE0S
	22	F55	1.0	140	EMVY250ADA220MF55G				100	KE0	0.33	450	EMVY101ARA101MKE0S
	33	F55	1.0	140	EMVY250ADA330MF55G	100	LH0		0.24	650	EMVY101□DA101MLH0S		
	47	F55	1.0	140	EMVY250ADA470MF55G	220	LN0		0.16	900	EMVY101□DA221MLN0S		
	100	F80	0.34	280	EMVY250ADA101MF80G	220	MH0		0.24	700	EMVY101□DA221MMH0S		
	220	HA0	0.30	450	EMVY250ADA221MHA0G	330	MN0		0.16	950	EMVY101□DA331MMN0S		


□ : Fill with appropriate terminal code.



SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS Low impedance, 5000-hours-life, 105°C

New! Alchip™-MZD Series

- Endurance : 5,000 hours at 105°C
- Low impedance
- Rated voltage range : 6.3 to 50V
- Nominal capacitance range : 10 to 470μF
- Suitable for high reliability products
- RoHS Compliant




◆SPECIFICATIONS


Items	Characteristics							
Category Temperature Range	-25 to +105°C							
Rated Voltage Range	6.3 to 50V _{dc}							
Capacitance Tolerance	±20%(M) (at 20°C,120Hz)							
Leakage Current	I=0.01CV or 3μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C, after 2 minutes)							
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	(at 20°C,120Hz)
	tanδ (Max.)	0.32	0.28	0.26	0.16	0.14	0.14	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage(V _{dc})	6.3V	10V	16V	25V	35V	50V	(at 120Hz)
	Z(-10°C)/Z(+20°C)	4	3	2	2	2	2	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 5,000 hours at 105°C.							
	Capacitance change	≤±30% of the initial value						
	D.F. (tanδ)	≤300% of the initial specified value						
	Leakage current	≤The initial specified value						
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.							
	Capacitance change	≤±30% of the initial value						
	D.F. (tanδ)	≤300% of the initial specified value						
	Leakage current	≤The initial specified value						

◆DIMENSIONS [mm]

- Terminal Code : A

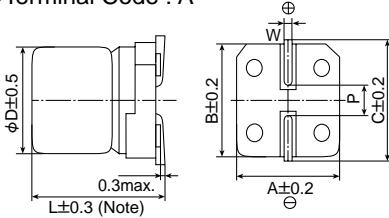

◆PART NUMBERING SYSTEM

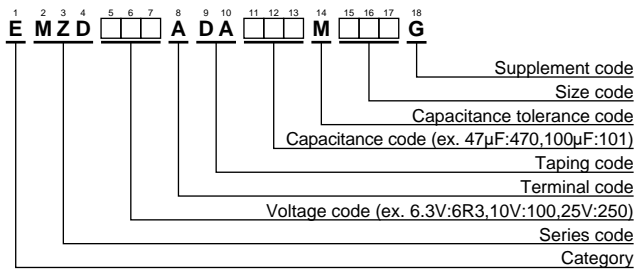

Size code	D	L	A	B	C	W	P
E73	5	7.0	5.3	5.3	5.9	0.5 to 0.8	1.4
F73	6.3	7.0	6.6	6.6	7.2	0.5 to 0.8	1.9
F90	6.3	8.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

Please refer to "A guide to global code (surface mount type)"

◆MARKING

EX) 16V47μF



- Rated voltage code


Rated voltage	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size code	Impedance (Ω _{max} /20°C, 100kHz)	Rated ripple current (mA _{RMS} /105°C, 100kHz)	Part No.	WV (V _{dc})	Cap (μF)	Size code	Impedance (Ω _{max} /20°C, 100kHz)	Rated ripple current (mA _{RMS} /105°C, 100kHz)	Part No.	
6.3	47	E73	2.2	95	EMZD6R3ADA470ME73G	25	47	F73	1.1	140	EMZD250ADA470MF73G	
	100	F73	1.1	140	EMZD6R3ADA101MF73G		100	F90	1.0	230	EMZD250ADA101MF90G	
	220	F90	1.0	230	EMZD6R3ADA221MF90G		220	HA0	0.22	600	EMZD250ADA221MHA0G	
	330	F90	1.0	230	EMZD6R3ADA331MF90G		330	HA0	0.22	600	EMZD250ADA331MHA0G	
	470	HA0	0.22	600	EMZD6R3ADA471MHA0G		470	JA0	0.16	850	EMZD250ADA471MJA0G	
10	33	E73	2.2	95	EMZD100ADA330ME73G	35	10	E73	2.2	95	EMZD350ADA100ME73G	
	150	F73	1.1	140	EMZD100ADA151MF73G		10	F73	1.1	140	EMZD350ADA100MF73G	
16	22	E73	2.2	95	EMZD160ADA220ME73G		22	E73	2.2	95	EMZD350ADA220ME73G	
	47	F73	1.1	140	EMZD160ADA470MF73G		22	F73	1.1	140	EMZD350ADA220MF73G	
	100	F73	1.1	140	EMZD160ADA101MF73G		33	F90	1.0	230	EMZD350ADA330MF90G	
	150	F90	1.0	230	EMZD160ADA151MF90G		47	F90	1.0	230	EMZD350ADA470MF90G	
	220	F90	1.0	230	EMZD160ADA221MF90G		220	HA0	0.22	600	EMZD350ADA221MHA0G	
	330	HA0	0.22	600	EMZD160ADA331MHA0G		330	JA0	0.16	850	EMZD350ADA331MJA0G	
25	470	HA0	0.22	600	EMZD160ADA471MHA0G		50	47	HA0	0.53	350	EMZD500ADA470MHA0G
	22	E73	2.2	95	EMZD250ADA220ME73G			100	HA0	0.53	350	EMZD500ADA101MHA0G
33	F73	1.1	140	EMZD250ADA330MF73G	220	JA0		0.35	670	EMZD500ADA221MJA0G		

Alchip™-**MLA** Series

- Low impedance, long life
- Rated voltage 6.3 to 50V, Capacitance 10 to 1,000μF
- Case size φ5×5.8L to φ10×10L
- Suitable for applications requiring long life and low impedance such as continuously operating equipment, industrial applications, etc.
- RoHS Compliant




◆ **SPECIFICATIONS**

Items	Characteristics						
Category	-40 to +105°C						
Temperature Range							
Rated Voltage Range	6.3 to 50V _{dc}						
Capacitance Tolerance	±20%(M) (20°C, 120Hz)						
Leakage Current	I=0.01CV or 3μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)						
Dissipation Factor (tanδ)	Rated voltage(V _{dc})	6.3V	10V	16V	25V	35V	50V
	E61 to F61	0.28	0.24	0.22	0.16	0.13	0.12
	F80	0.32	0.27	0.24	0.16	0.13	0.12
	HA0 to JA0	0.28	0.24	0.22	0.16	0.13	0.12
Low Temperature Characteristics (Max. impedance Ratio)	Rated voltage(V _{dc})	6.3V	10V	16V	25V	35V	50V
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2
	Z(-40°C)/Z(+20°C)	10	7	5	3	3	3
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 3,000 hours at 105°C.						
	Capacitance change	≤±30% of the initial measured value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					
Shelf life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.						
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					

◆ **DIMENSIONS [mm]**

● Terminal Code : A

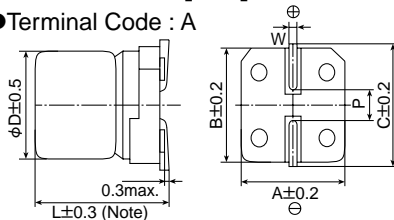

Note : L±0.5 for HA0 and JA0


Case code	D	L	A	B	C	W	P
E61	5	5.8	5.3	5.3	5.9	0.5 to 0.8	1.4
F61	6.3	5.8	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

◆ **MARKING**

EX) 16V100μF



◆ **PART NUMBERING SYSTEM**

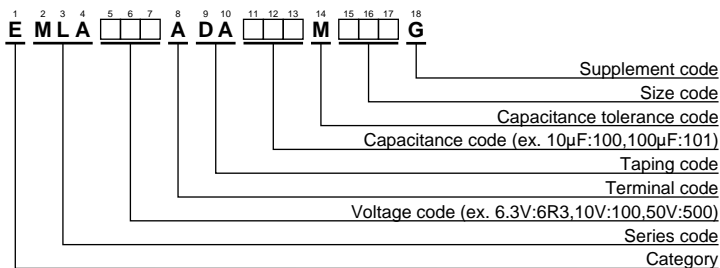

Please refer to "A guide to global code (surface mount type)"

◆ **RATED VOLTAGE SYMBOL**


Rated voltage (V _{dc})	Symbol
6.3	j
10	A
16	C
25	E
35	V
50	H

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Size code	tanδ	Impedance (Ωmax/20°C, 100kHz)	Rated ripple current (mA rms/105°C, 100kHz)	Part No.	WV (Vdc)	Cap (μF)	Size code	tanδ	Impedance (Ωmax/20°C, 100kHz)	Rated ripple current (mA rms/105°C, 100kHz)	Part No.
6.3	47	E61	0.28	1.30	95	EMLA6R3ADA470ME61G	25	33	F61	0.16	0.70	140	EMLA250ADA330MF61G
	100	F61	0.28	0.70	140	EMLA6R3ADA101MF61G		47	F61	0.16	0.70	140	EMLA250ADA470MF61G
	150	F61	0.28	0.70	140	EMLA6R3ADA151MF61G		47	F80	0.16	0.70	230	EMLA250ADA470MF80G
	220	F80	0.32	0.70	230	EMLA6R3ADA221MF80G		100	F80	0.16	0.70	230	EMLA250ADA101MF80G
	330	F80	0.32	0.70	230	EMLA6R3ADA331MF80G		100	HA0	0.16	0.16	600	EMLA250ADA101MHA0G
	330	HA0	0.28	0.16	600	EMLA6R3ADA331MHA0G		150	HA0	0.16	0.16	600	EMLA250ADA151MHA0G
	470	HA0	0.28	0.16	600	EMLA6R3ADA471MHA0G		220	HA0	0.16	0.16	600	EMLA250ADA221MHA0G
	1,000	JA0	0.28	0.08	850	EMLA6R3ADA102MJA0G		330	HA0	0.16	0.16	600	EMLA250ADA331MHA0G
10	33	E61	0.24	1.30	95	EMLA100ADA330ME61G	330	JA0	0.16	0.08	850	EMLA250ADA331MJA0G	
	47	F61	0.24	0.70	140	EMLA100ADA470MF61G	470	JA0	0.16	0.08	850	EMLA250ADA471MJA0G	
	100	F61	0.24	0.70	140	EMLA100ADA101MF61G	35	10	E61	0.13	1.30	95	EMLA350ADA100ME61G
	150	F61	0.24	0.70	140	EMLA100ADA151MF61G		22	F61	0.13	0.70	140	EMLA350ADA220MF61G
	220	F80	0.27	0.70	230	EMLA100ADA221MF80G		33	F61	0.13	0.70	140	EMLA350ADA330MF61G
	220	HA0	0.24	0.16	600	EMLA100ADA221MHA0G		33	F80	0.13	0.70	230	EMLA350ADA330MF80G
	330	HA0	0.24	0.16	600	EMLA100ADA331MHA0G		47	F80	0.13	0.70	230	EMLA350ADA470MF80G
470	HA0	0.24	0.16	600	EMLA100ADA471MHA0G	100		F80	0.13	0.70	230	EMLA350ADA101MF80G	
22	E61	0.22	1.30	95	EMLA160ADA220ME61G	100		HA0	0.13	0.16	600	EMLA350ADA101MHA0G	
16	33	F61	0.22	0.70	140	EMLA160ADA330MF61G	150	HA0	0.13	0.16	600	EMLA350ADA151MHA0G	
	47	F61	0.22	0.70	140	EMLA160ADA470MF61G	220	HA0	0.13	0.16	600	EMLA350ADA221MHA0G	
	100	F61	0.22	0.70	140	EMLA160ADA101MF61G	220	JA0	0.13	0.08	850	EMLA350ADA221MJA0G	
	100	F80	0.24	0.70	230	EMLA160ADA101MF80G	330	JA0	0.13	0.08	850	EMLA350ADA331MJA0G	
	150	F80	0.24	0.70	230	EMLA160ADA151MF80G	50	10	F61	0.12	2.00	70	EMLA500ADA100MF61G
	220	F80	0.24	0.70	230	EMLA160ADA221MF80G		22	F61	0.12	2.00	70	EMLA500ADA220MF61G
	220	HA0	0.22	0.16	600	EMLA160ADA221MHA0G		33	F80	0.12	1.60	100	EMLA500ADA330MF80G
	330	HA0	0.22	0.16	600	EMLA160ADA331MHA0G		47	F80	0.12	1.60	100	EMLA500ADA470MF80G
	470	HA0	0.22	0.16	600	EMLA160ADA471MHA0G		47	HA0	0.12	0.34	350	EMLA500ADA470MHA0G
	470	JA0	0.22	0.08	850	EMLA160ADA471MJA0G		100	HA0	0.12	0.34	350	EMLA500ADA101MHA0G
10	E61	0.16	1.30	95	EMLA250ADA100ME61G	100		JA0	0.12	0.18	670	EMLA500ADA101MJA0G	
22	E61	0.16	1.30	95	EMLA250ADA220ME61G	150		JA0	0.12	0.18	670	EMLA500ADA151MJA0G	
22	F61	0.16	0.70	140	EMLA250ADA220MF61G	220		JA0	0.12	0.18	670	EMLA500ADA221MJA0G	

Alchip™ - MVJ Series

- Endurance : 105°C 2,000 hours
- Solvent-proof type
- RoHS Compliant




◆ SPECIFICATIONS

Items	Characteristics							
Category Temperature Range	-40 to +105°C							
Rated Voltage Range	6.3 to 50V _{dc}							
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)							
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)							
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	(at 20°C, 120Hz)
	tanδ (Max.)	0.30	0.24	0.20	0.16	0.14	0.12	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	(at 120Hz)
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	
	Z(-40°C)/Z(+20°C)	12	8	6	4	3	3	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 105°C.							
	Rated voltage	6.3V _{dc}			10 & 16V _{dc}		25 to 50V _{dc}	
	Capacitance change	≤±30% of the initial value			≤±25% of the initial value		≤±20% of the initial value	
	D.F. (tanδ)	≤300% of the initial specified value			≤300% of the initial specified value		≤200% of the initial specified value	
	Leakage current	The initial specified value			≤The initial specified value		≤The initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.							
	Rated voltage	6.3V _{dc}			10 & 16V _{dc}		25 to 50V _{dc}	
	Capacitance change	≤±30% of the initial value			≤±25% of the initial value		≤±20% of the initial value	
	D.F. (tanδ)	≤300% of the initial specified value			≤300% of the initial specified value		≤200% of the initial specified value	
	Leakage current	≤The initial specified value			≤The initial specified value		≤The initial specified value	


◆ DIMENSIONS [mm]

● Terminal Code : A

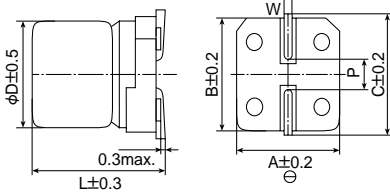

Size code	D	L	A	B	C	W	P
D60	4	5.7	4.3	4.3	5.1	0.5 to 0.8	1.0
E60	5	5.7	5.3	5.3	5.9	0.5 to 0.8	1.4
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9

◆ PART NUMBERING SYSTEM

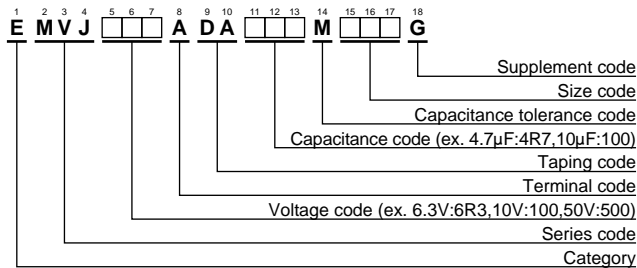

Please refer to "A guide to global code (surface mount type)"

◆ MARKING

EX) 6.3V100μF




◆ STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mArms/105°C,120Hz)	Part No.
6.3	22	D60	0.30	21	EMVJ6R3ADA220MD60G
	47	E60	0.30	36	EMVJ6R3ADA470ME60G
	100	F60	0.30	56	EMVJ6R3ADA101MF60G
10	33	E60	0.24	34	EMVJ100ADA330ME60G
	10	D60	0.20	16	EMVJ160ADA100MD60G
	22	E60	0.20	30	EMVJ160ADA220ME60G
16	47	F60	0.20	48	EMVJ160ADA470MF60G
	25	F60	0.16	45	EMVJ250ADA330MF60G
	35	F60	0.16	45	EMVJ250ADA330MF60G
35	4.7	D60	0.14	15	EMVJ350ADA4R7MD60G
	10	E60	0.14	25	EMVJ350ADA100ME60G
	35	F60	0.14	40	EMVJ350ADA220MF60G
50	0.10	D60	0.12	1.3	EMVJ500ADAR10MD60G
	0.22	D60	0.12	2.6	EMVJ500ADAR22MD60G
	0.33	D60	0.12	3.2	EMVJ500ADAR33MD60G
	0.47	D60	0.12	3.8	EMVJ500ADAR47MD60G
	1.0	D60	0.12	5.6	EMVJ500ADA1R0MD60G
	2.2	D60	0.12	10	EMVJ500ADA2R2MD60G
	3.3	D60	0.12	14	EMVJ500ADA3R3MD60G
	4.7	E60	0.12	19	EMVJ500ADA4R7ME60G
	10	F60	0.12	29	EMVJ500ADA100MF60G
	10	F60	0.12	29	EMVJ500ADA100MF60G

New!

Alchip™-MLD Series

- Endurance : 5,000 hours at 105°C
- Rated voltage range : 6.3 to 50V
- Nominal capacitance range : 0.1 to 1,000µF
- Suitable for high reliability products
- RoHS Compliant




◆SPECIFICATIONS

Items	Characteristics						
Category Temperature Range	-25 to +105°C						
Rated Voltage Range	6.3 to 50V _{dc}						
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)						
Leakage Current	I=0.03CV or 4µA, whichever is greater Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C, after 2 minutes)						
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V
	tanδ (Max.)	0.32	0.28	0.26	0.16	0.14	0.14
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage(V _{dc})	6.3V	10V	16V	25V	35V	50V
	Z(-10°C)/Z(+20°C)	4	3	2	2	2	2
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 5,000 hours at 105°C.						
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.						
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					

◆DIMENSIONS [mm]


●Terminal Code : A

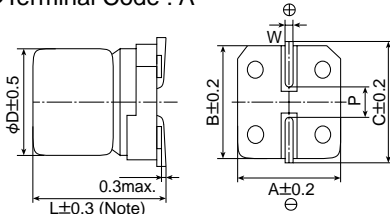

Note : L±0.5 for HA0 and JA0

Size code	D	L	A	B	C	W	P
D73	4	7.0	4.3	4.3	5.1	0.5 to 0.8	1.0
E73	5	7.0	5.3	5.3	5.9	0.5 to 0.8	1.4
F73	6.3	7.0	6.6	6.6	7.2	0.5 to 0.8	1.9
F90	6.3	8.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

◆PART NUMBERING SYSTEM

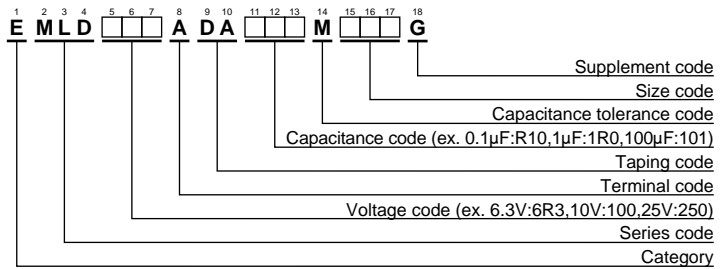

Please refer to "A guide to global code (surface mount type)"

◆MARKING

EX) 16V47µF



●Rated voltage code


Rated voltage	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

◆STANDARD RATINGS

WV (Vdc)	Cap (µF)	Size code	tanδ	Rated ripple current (mA _{rms} /105°C, 120Hz)	Part No.	WV (Vdc)	Cap (µF)	Size code	tanδ	Rated ripple current (mA _{rms} /105°C, 120Hz)	Part No.
6.3	22	D73	0.32	22	EMLD6R3ADA220MD73G	35	0.1	D73	0.14	1.0	EMLD350ADAR10MD73G
	47	E73	0.32	36	EMLD6R3ADA470ME73G		0.22	D73	0.14	2.6	EMLD350ADAR22MD73G
	100	F73	0.32	60	EMLD6R3ADA101MF73G		0.33	D73	0.14	3.2	EMLD350ADAR33MD73G
	220	F90	0.32	101	EMLD6R3ADA221MF90G		0.47	D73	0.14	3.8	EMLD350ADAR47MD73G
	330	HA0	0.32	160	EMLD6R3ADA331MHA0G		1.0	D73	0.14	6.2	EMLD350ADA1R0MD73G
	1,000	JA0	0.32	313	EMLD6R3ADA102MJA0G		2.2	D73	0.14	11	EMLD350ADA2R2MD73G
10	33	E73	0.28	35	EMLD100ADA330ME73G		3.3	D73	0.14	14	EMLD350ADA3R3MD73G
	220	HA0	0.28	141	EMLD100ADA221MHA0G		4.7	D73	0.14	15	EMLD350ADA4R7MD73G
	10	D73	0.26	18	EMLD160ADA100MD73G		4.7	E73	0.14	19	EMLD350ADA4R7ME73G
16	22	E73	0.26	30	EMLD160ADA220ME73G		10	E73	0.14	25	EMLD350ADA100ME73G
	47	F73	0.26	50	EMLD160ADA470MF73G		10	F73	0.14	30	EMLD350ADA100MF73G
	100	F90	0.26	81	EMLD160ADA101MF90G		22	F73	0.14	42	EMLD350ADA220MF73G
	470	JA0	0.26	254	EMLD160ADA471MJA0G	22	F90	0.14	49	EMLD350ADA220MF90G	
25	33	F73	0.16	48	EMLD250ADA330MF73G	33	F90	0.14	57	EMLD350ADA330MF90G	
	47	F90	0.16	63	EMLD250ADA470MF90G	220	JA0	0.14	216	EMLD350ADA221MJA0G	
	100	HA0	0.16	116	EMLD250ADA101MHA0G	33	HA0	0.14	77	EMLD500ADA330MHA0G	
	47	HA0	0.14	92	EMLD500ADA470MHA0G	100	JA0	0.14	151	EMLD500ADA101MJA0G	

Alchip™-MVL Series

- Endurance : 3,000 to 5,000 hours at 105°C
- Suitable for applications requiring long life such as continuously operating equipment, industrial applications, etc
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant




◆SPECIFICATIONS

Items	Characteristics
Category	
Temperature Range	-40 to +105°C
Rated Voltage Range	6.3 to 50V _{dc}
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)
Leakage Current	I=0.03CV or 4μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C, after 2 minutes)
Dissipation Factor (tanδ)	Rated voltage (V _{dc})
	Max. tanδ
Low Temperature Characteristics (Max. impedance Ratio)	Rated voltage (V _{dc})
	Z(-25°C)/Z(+20°C)
	Z(-40°C)/Z(+20°C)
Endurance	After the capacitors are subjected to the rated DC voltage for 3,000 hours (HA0 & JA0 sizes 5,000 hours) at 105°C, the following specifications shall be satisfied when the capacitors are restored to 20°C.
	Capacitance change
	D.F. (tanδ)
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.
	Capacitance change
	D.F. (tanδ)


◆DIMENSIONS [mm]

●Terminal Code : A

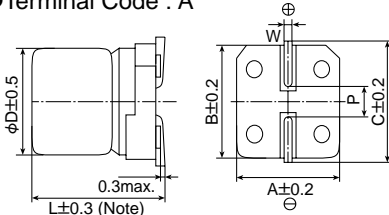


Size code	D	L	A	B	C	W	P
D60	4	5.7	4.3	4.3	5.1	0.5 to 0.8	1.0
E60	5	5.7	5.3	5.3	5.9	0.5 to 0.8	1.4
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

◆PART NUMBERING SYSTEM

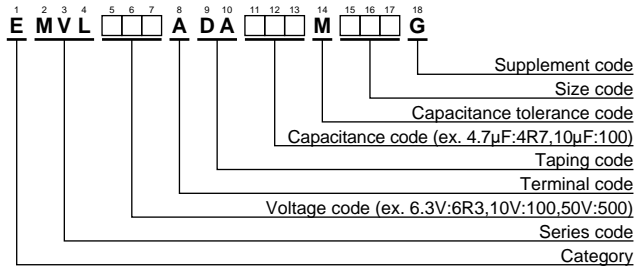

Please refer to "A guide to global code (surface mount type)"

◆MARKING



◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mArms/105°C, 120Hz)	Part No.	
6.3	22	D60	0.28	22	EMVL6R3ADA220MD60G	
	47	E60	0.28	36	EMVL6R3ADA470ME60G	
	100	F60	0.28	60	EMVL6R3ADA101MF60G	
	220	F80	0.28	101	EMVL6R3ADA221MF80G	
	330	HA0	0.28	160	EMVL6R3ADA331MHA0G	
	1,000	JA0	0.28	313	EMVL6R3ADA102MJA0G	
10	33	E60	0.24	35	EMVL100ADA330ME60G	
	220	HA0	0.24	141	EMVL100ADA221MHA0G	
	10	D60	0.20	18	EMVL160ADA100MD60G	
16	22	E60	0.20	30	EMVL160ADA220ME60G	
	47	F60	0.20	50	EMVL160ADA470MF60G	
	100	F80	0.20	81	EMVL160ADA101MF80G	
	470	JA0	0.20	254	EMVL160ADA471MJA0G	
	25	33	F60	0.16	48	EMVL250ADA330MF60G
47		F80	0.16	63	EMVL250ADA470MF80G	
100		HA0	0.16	116	EMVL250ADA101MHA0G	
330		JA0	0.16	238	EMVL250ADA331MJA0G	
35		4.7	D60	0.13	15	EMVL350ADA4R7MD60G
	10	E60	0.13	25	EMVL350ADA100ME60G	
	22	F60	0.13	42	EMVL350ADA220MF60G	
	33	F80	0.13	57	EMVL350ADA330MF80G	
	220	JA0	0.13	216	EMVL350ADA221MJA0G	
	50	0.10	D60	0.12	1.0	EMVL500ADAR10MD60G
		0.22	D60	0.12	2.6	EMVL500ADAR22MD60G
		0.33	D60	0.12	3.2	EMVL500ADAR33MD60G
		0.47	D60	0.12	3.8	EMVL500ADAR47MD60G
		1.0	D60	0.12	6.2	EMVL500ADA1R0MD60G
2.2		D60	0.12	11	EMVL500ADA2R2MD60G	
3.3		D60	0.12	14	EMVL500ADA3R3MD60G	
4.7		E60	0.12	19	EMVL500ADA4R7ME60G	
10		F60	0.12	30	EMVL500ADA100MF60G	
22		F80	0.12	49	EMVL500ADA220MF80G	
100	33	HA0	0.12	77	EMVL500ADA330MHA0G	
	47	HA0	0.12	92	EMVL500ADA470MHA0G	
	100	JA0	0.12	151	EMVL500ADA101MJA0G	

Alchip™ - **MVH** Series

- Lower ESR, Higher ripple current
- Endurance : 1,000 to 5,000 hours at 125°C
- Suitable to fit for automotive equipment
- Solvent-proof type (10 to 50V)
- RoHS Compliant

MVH

↑ 125°C
Expanded case size
MVK




◆ SPECIFICATIONS


Items	Characteristics													
Category	-40 to +125°C													
Temperature Range	-40 to +125°C													
Rated Voltage Range	10 to 450V _{dc}													
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)													
Leakage Current	Rated voltage (V _{dc})	10 to 100V _{dc}						160 to 450V _{dc}						
	F60 to JA0	I=0.01CV or 3μA, whichever is greater.						I=0.04CV+100						
	KE0 to MN0	I=0.03CV or 4μA, whichever is greater.												
Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)														
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	10V	16V	25V	35V	50V	63V	80V	100V	160 to 250V	400 & 450V			
	tanδ (Max.)	F60 to JA0	0.24	0.20	0.16	0.14	0.14	0.12	0.12	0.10	—	—		
		KE0 to MN0	0.22	0.18	0.16	0.14	0.12	0.14	—	0.10	0.20	0.24		
When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)														
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	10V	16V	25V	35V	50V	63V	80V	100V	160 to 250V	400 & 450V			
	F60 to JA0	Z(-25°C)/Z(+20°C)	3	2	2	2	2	2	2	2	—	—		
		Z(-40°C)/Z(+20°C)	6	4	4	3	3	3	3	3	—	—		
	KE0 to MN0	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	—	2	3	6		
		Z(-40°C)/Z(+20°C)	8	6	4	3	3	3	—	3	6	10	(at 120Hz)	
Endurance														
The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for the specified time at 125°C.														
Time	F60 to H63 (10 to 100V _{dc}) : 1,000hours HA0 to JA0 (10 to 100V _{dc}) : 2,000hours KE0 to MN0 (10 to 100V _{dc}) : 5,000hours KE0 to MN0 (160 to 450V _{dc}) : 2,000hours													
Capacitance change	≤±30% of the initial value													
D.F. (tanδ)	≤300% of the initial specified value													
Leakage current	≤The initial specified value													
Shelf Life														
The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours (500 hours for 400 to 450VV) at 125°C without voltage applied.														
Rated voltage(V _{dc})	10 to 50V _{dc}						63 to 450V _{dc}							
Capacitance change	≤±30% of the initial value						≤±30% of the initial value							
D.F. (tanδ)	≤300% of the initial specified value						≤300% of the initial specified value							
Leakage current	≤The initial specified value						≤500% of the initial specified value							

◆ DIMENSIONS [mm]

- Terminal Code : A
- Size code : F60 to MN0

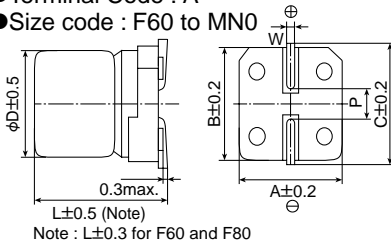

- Terminal Code : G
- Size code : LH0 to MN0

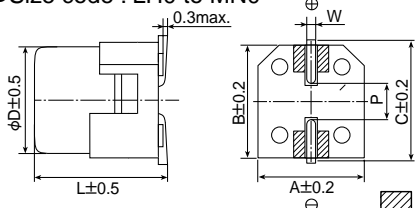


Size code	D	L	A	B	C	W	P
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MN0	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

◆ MARKING

F60 to JA0
EX) 35V47μF




KE0 to MN0
EX) 16V1,000μF





Alchip™-MVH Series

◆PART NUMBERING SYSTEM

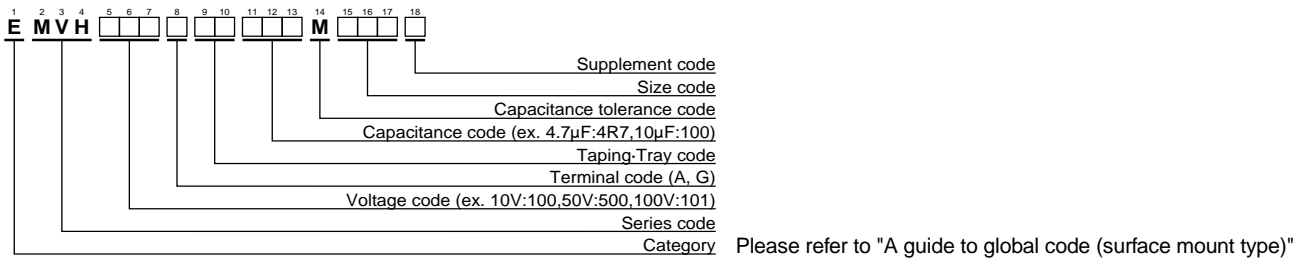

◆STANDARD RATINGS

□ is non solvent-proof (63 to 450Vdc).

VV (Vdc)	Cap (μF)	Size code	ESR (Ωmax/ 100kHz)		Rated ripple current (mArms/125°C)		Part No.	
			20°C	-40°C	100kHz	120Hz		
10	100	F80	0.90	14.0	110	—	EMVH100ADA101MF80G	
	100	H63	0.90	14.0	110	—	EMVH100ADA101MH63G	
	220	F80	0.90	14.0	110	—	EMVH100ADA221MF80G	
	220	H63	0.90	14.0	110	—	EMVH100ADA221MH63G	
	220	HA0	0.40	6.0	220	—	EMVH100ADA221MHA0G	
	330	HA0	0.40	6.0	220	—	EMVH100ADA331MHA0G	
	330	JA0	0.30	4.5	296	—	EMVH100ADA331MJA0G	
	470	JA0	0.30	4.5	296	—	EMVH100ADA471MJA0G	
	1,000	KE0	0.14	2.1	750	—	EMVH100ARA102MKE0S	
	2,200	LH0	0.10	1.5	1,000	—	EMVH100DA222MLH0S	
	2,200	MH0	0.10	1.5	1,200	—	EMVH100DA222MMH0S	
	3,300	MH0	0.10	1.5	1,200	—	EMVH100DA332MMH0S	
	4,700	MN0	0.058	0.87	1,550	—	EMVH100DA472MNM0S	
	16	47	F60	1.6	24.0	69	—	EMVH160ADA470MF60G
100		HA0	0.40	6.0	220	—	EMVH160ADA101MHA0G	
220		HA0	0.40	6.0	220	—	EMVH160ADA221MHA0G	
220		JA0	0.30	4.5	296	—	EMVH160ADA221MJA0G	
330		JA0	0.30	4.5	296	—	EMVH160ADA331MJA0G	
470		KE0	0.14	2.1	750	—	EMVH160ARA471MKE0S	
680		KE0	0.14	2.1	750	—	EMVH160ARA681MKE0S	
680		LH0	0.10	1.5	1,000	—	EMVH160DA681MLH0S	
1,000		MH0	0.10	1.5	1,200	—	EMVH160DA102MMH0S	
2,200		MH0	0.10	1.5	1,200	—	EMVH160DA222MMH0S	
25		33	F60	1.6	24.0	69	—	EMVH250ADA330MF60G
		47	F80	0.90	14.0	110	—	EMVH250ADA470MF80G
	47	H63	0.90	14.0	110	—	EMVH250ADA470MH63G	
	100	F80	0.90	14.0	110	—	EMVH250ADA101MF80G	
	100	H63	0.90	14.0	110	—	EMVH250ADA101MH63G	
	100	HA0	0.40	6.0	220	—	EMVH250ADA101MHA0G	
	220	HA0	0.40	6.0	220	—	EMVH250ADA221MHA0G	
	220	JA0	0.30	4.5	296	—	EMVH250ADA221MJA0G	
	330	JA0	0.30	4.5	296	—	EMVH250ADA331MJA0G	
	330	KE0	0.14	2.1	750	—	EMVH250ARA331MKE0S	
	470	KE0	0.14	2.1	750	—	EMVH250ARA471MKE0S	
	470	LH0	0.10	1.5	1,000	—	EMVH250DA471MLH0S	
	680	LH0	0.10	1.5	1,000	—	EMVH250DA681MLH0S	
	680	MH0	0.10	1.5	1,200	—	EMVH250DA681MMH0S	
	1,000	MN0	0.058	0.87	1,550	—	EMVH250DA102MNM0S	
	35	10	F60	1.6	24.0	69	—	EMVH350ADA100MF60G
22		F60	1.6	24.0	69	—	EMVH350ADA220MF60G	
33		F80	0.90	14.0	110	—	EMVH350ADA330MF80G	
33		H63	0.90	14.0	110	—	EMVH350ADA330MH63G	
47		F80	0.90	14.0	110	—	EMVH350ADA470MF80G	
47		H63	0.90	14.0	110	—	EMVH350ADA470MH63G	
47		HA0	0.40	6.0	220	—	EMVH350ADA470MHA0G	
100		HA0	0.40	6.0	220	—	EMVH350ADA101MHA0G	
100		JA0	0.30	4.5	296	—	EMVH350ADA101MJA0G	
220		JA0	0.30	4.5	296	—	EMVH350ADA221MJA0G	
330		KE0	0.14	2.1	750	—	EMVH350ARA331MKE0S	
330		LH0	0.10	1.5	1,000	—	EMVH350DA331MLH0S	
470		KG5	0.11	1.5	900	—	EMVH350ARA471MKG5S	
470		LH0	0.10	1.5	1,000	—	EMVH350DA471MLH0S	
680		MH0	0.10	1.5	1,200	—	EMVH350DA681MMH0S	
50		10	F60	2.8	42.0	51	—	EMVH500ADA100MF60G
		10	H63	1.6	30.0	83	—	EMVH500ADA100MH63G
		22	F80	2.0	30.0	83	—	EMVH500ADA220MF80G
	22	H63	1.6	30.0	83	—	EMVH500ADA220MH63G	

VV (Vdc)	Cap (μF)	Size code	ESR (Ωmax/ 100kHz)		Rated ripple current (mArms/125°C)		Part No.	
			20°C	-40°C	100kHz	120Hz		
50	33	F80	2.0	30.0	83	—	EMVH500ADA330MF80G	
	33	H63	1.6	30.0	83	—	EMVH500ADA330MH63G	
	33	HA0	0.70	11.0	160	—	EMVH500ADA330MHA0G	
	47	HA0	0.70	11.0	160	—	EMVH500ADA470MHA0G	
	47	JA0	0.50	7.5	247	—	EMVH500ADA470MJA0G	
	100	JA0	0.50	7.5	247	—	EMVH500ADA101MJA0G	
	100	KE0	0.23	3.5	550	—	EMVH500ARA101MKE0S	
	220	KE0	0.23	3.5	550	—	EMVH500ARA221MKE0S	
	220	LH0	0.15	2.3	850	—	EMVH500DA221MLH0S	
	330	KG5	0.18	2.7	700	—	EMVH500ARA331MKG5S	
	330	LH0	0.15	2.3	850	—	EMVH500DA331MLH0S	
	470	MH0	0.15	2.3	920	—	EMVH500DA471MMH0S	
	63	10	F80	2.0	100	60	—	EMVH630ADA100MF80G
		10	H63	2.0	110	60	—	EMVH630ADA100MH63G
		22	HA0	0.70	35.0	100	—	EMVH630ADA220MHA0G
		33	HA0	0.70	35.0	100	—	EMVH630ADA330MHA0G
33		JA0	0.50	25.0	170	—	EMVH630ADA330MJA0G	
47		HA0	0.70	35.0	100	—	EMVH630ADA470MHA0G	
47		JA0	0.50	25.0	170	—	EMVH630ADA470MJA0G	
100		KE0	0.25	12.5	500	—	EMVH630ARA101MKE0S	
220		KG5	0.20	10.0	600	—	EMVH630ARA221MKG5S	
330		LH0	0.18	9.0	820	—	EMVH630DA331MLH0S	
470		LN0	0.11	5.5	1,100	—	EMVH630DA471MLN0S	
80		10	HA0	0.75	50.0	70	—	EMVH800ADA100MHA0G
		22	HA0	0.75	50.0	70	—	EMVH800ADA220MHA0G
		22	JA0	0.55	35.0	115	—	EMVH800ADA220MJA0G
	33	HA0	0.75	50.0	70	—	EMVH800ADA330MHA0G	
	33	JA0	0.55	35.0	115	—	EMVH800ADA330MJA0G	
	47	JA0	0.55	35.0	115	—	EMVH800ADA470MJA0G	
	100	10	HA0	0.75	50.0	70	—	EMVH101ADA100MHA0G
		22	HA0	0.75	50.0	70	—	EMVH101ADA220MHA0G
		22	JA0	0.55	35.0	115	—	EMVH101ADA220MJA0G
		33	JA0	0.55	35.0	115	—	EMVH101ADA330MJA0G
47		KE0	0.33	16.5	450	—	EMVH101ARA470MKE0S	
68		KG5	0.26	13.0	550	—	EMVH101ARA680MKG5S	
100		LH0	0.24	12.0	650	—	EMVH101DA101MLH0S	
220		MN0	0.16	8.0	950	—	EMVH101DA221MNM0S	
160	10	KE0	—	—	100	—	EMVH161ARA100MKE0S	
	22	LH0	—	—	180	—	EMVH161DA220MLH0S	
	33	MH0	—	—	245	—	EMVH161DA330MMH0S	
	68	MN0	—	—	380	—	EMVH161DA680MNM0S	
	200	10	KE0	—	—	100	—	EMVH201ARA100MKE0S
		22	LH0	—	—	180	—	EMVH201DA220MLH0S
33		LN0	—	—	250	—	EMVH201DA330MLN0S	
33		MH0	—	—	245	—	EMVH201DA330MMH0S	
250	47	MN0	—	—	315	—	EMVH201DA470MNM0S	
	10	KG5	—	—	110	—	EMVH251ARA100MKG5S	
	22	LN0	—	—	200	—	EMVH251DA220MLN0S	
	22	MH0	—	—	205	—	EMVH251DA220MMH0S	
	33	MN0	—	—	260	—	EMVH251DA330MMN0S	
400	4.7	KE0	—	—	70	—	EMVH401ARA4R7MKE0S	
	6.8	LH0	—	—	100	—	EMVH401DA6R8MLH0S	
	10	LN0	—	—	140	—	EMVH401DA100MLN0S	
450	10	MH0	—	—	135	—	EMVH401DA100MMH0S	
	3.3	KG5	—	—	65	—	EMVH451ARA3R3MKG5S	
	4.7	LH0	—	—	85	—	EMVH451DA4R7MLH0S	
	10	MN0	—	—	145	—	EMVH451DA100MNM0S	

□ : Fill with appropriate terminal code.

New!
Alchip™ - MKB Series

- Low ESR
- Endurance : 3,000 hours at 105°C
- Rated voltage 400V, Capacitance 2.2 to 4.7μF
- RoHS Compliant




◆ SPECIFICATIONS

Items	Characteristics	
Category	-40 to +105°C	
Temperature Range	-40 to +105°C	
Rated Voltage Range	400V _{dc}	
Capacitance Tolerance	±20%(M)	(20°C, 120Hz)
Leakage Current	I=0.04CV+100(max.) Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 1 minute)	
Dissipation Factor (tanδ)	Rated voltage(V _{dc}) 400V tanδ (Max.) 0.25	(20°C, 120Hz)
Low Temperature Characteristics (Max. impedance Ratio)	Rated voltage(V _{dc}) 400V Z(-25°C)/Z(+20°C) 6 Z(-40°C)/Z(+20°C) 10	(120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 3,000 hours at 105°C.	
	Capacitance change	≤±20% of the initial value
	D.F. (tanδ)	≤200% of the initial specified value
	Leakage current	≤The initial specified value
Shelf life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied.	
	Capacitance change	≤±20% of the initial value
	D.F. (tanδ)	≤200% of the initial specified value
	Leakage current	≤The initial specified value

◆ DIMENSIONS [mm]

● Terminal Code : A

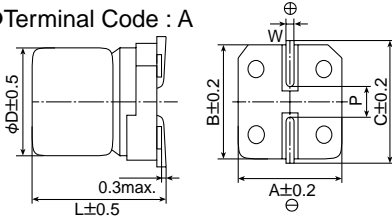


Size code	D	L	A	B	C	W	P
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

◆ MARKING

EX) 400V3.9μF



◆ PART NUMBERING SYSTEM

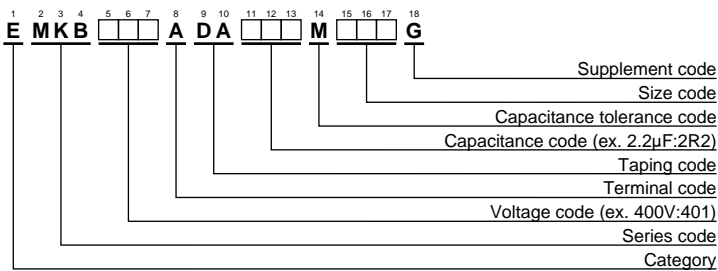

Please refer to "A guide to global code (surface mount type)"

◆ RATED VOLTAGE SYMBOL

Rated voltage (V _{dc})	Symbol
400	2G


◆ STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size code	ESR (Ω _{max} /120Hz)		Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.
			20°C	-40°C		
400	2.2	HA0	20	1,000	26	EMKB401ADA2R2MHA0G
	3.3	JA0	10	500	37	EMKB401ADA3R3MJA0G
	3.9	JA0	10	500	38	EMKB401ADA3R9MJA0G
	4.7	JA0	10	500	39	EMKB401ADA4R7MJA0G

Alchip™ - **MV-BP** Series

- Bi-polarized chip type for the circuit, of which polarity is frequently reversed
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

MV-BP




◆ SPECIFICATIONS

Items	Characteristics								
Category	-40 to +85°C								
Temperature Range									
Rated Voltage Range	4 to 50V _{dc}								
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)								
Leakage Current	I=0.05CV or 10μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)								
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	(at 20°C, 120Hz)
	tanδ (Max.)	0.45	0.32	0.26	0.24	0.22	0.20	0.20	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	(at 120Hz)
	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2	
	Z(-40°C)/Z(+20°C)	15	10	8	6	4	3	3	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C, however the polarization shall be reversed every 250 hours.								
	Capacitance change	≤±20% of the initial value							
	D.F. (tanδ)	≤200% of the initial specified value							
	Leakage current	≤The initial specified value							
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 85°C without voltage applied.								
	Capacitance change	≤±15% of the initial value							
	D.F. (tanδ)	≤150% of the initial specified value							
	Leakage current	≤The initial specified value							


◆ DIMENSIONS [mm]

● Terminal Code : A

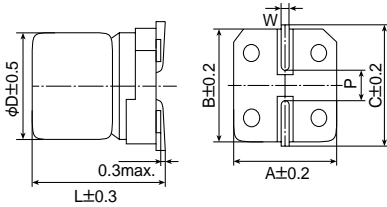

Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9

◆ PART NUMBERING SYSTEM

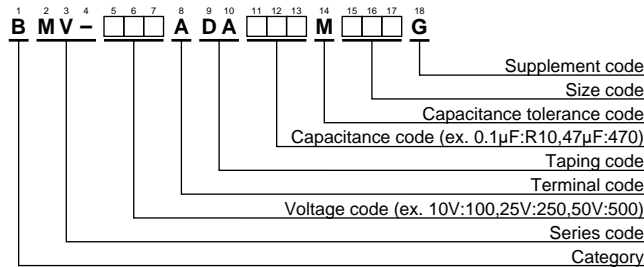

Please refer to "A guide to global code (surface mount type)"

◆ MARKING

EX) 35V4.7μF



◆ STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /85°C,120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /85°C,120Hz)	Part No.	
4	(15)	(D55)	(0.45)	(14)	BMV-4R0ADA150MD55G	35	4.7	E55	0.20	13	BMV-350ADA4R7ME55G	
	10	D55	0.32	13	BMV-6R3ADA100MD55G		(6.8)	(F55)	(0.20)	(17)	BMV-350ADA6R8MF55G	
	6.3	22	E55	0.32	23		BMV-6R3ADA220ME55G	10	F55	0.20	21	BMV-350ADA100MF55G
		47	F55	0.32	36		BMV-6R3ADA470MF55G	0.10	D55	0.20	1.3	BMV-500ADAR10MD55G
10	(6.8)	(D55)	(0.26)	(12)	BMV-100ADA6R8MD55G		(0.15)	(D55)	(0.20)	(1.9)	BMV-500ADAR15MD55G	
	(15)	(E55)	(0.26)	(21)	BMV-100ADA150ME55G		0.22	D55	0.20	2.3	BMV-500ADAR22MD55G	
	33	F55	0.26	33	BMV-100ADA330MF55G		0.33	D55	0.20	2.8	BMV-500ADAR33MD55G	
		4.7	D55	0.24	11		BMV-160ADA4R7MD55G	0.47	D55	0.20	3.4	BMV-500ADAR47MD55G
16	10	E55	0.24	18	BMV-160ADA100ME55G		(0.68)	(D55)	(0.20)	(4.1)	BMV-500ADAR68MD55G	
	22	F55	0.24	28	BMV-160ADA220MF55G		1.0	D55	0.20	5.5	BMV-500ADA1R0MD55G	
		3.3	D55	0.22	9.0		BMV-250ADA3R3MD55G	(1.5)	(D55)	(0.20)	(6.5)	BMV-500ADA1R5MD55G
25	(6.8)	(E55)	(0.22)	(15)	BMV-250ADA6R8ME55G		2.2	E55	0.20	9.0	BMV-500ADA2R2ME55G	
	(15)	(F55)	(0.22)	(24)	BMV-250ADA150MF55G	3.3	E55	0.20	11	BMV-500ADA3R3ME55G		
		2.2	D55	0.20	8.0	BMV-350ADA2R2MD55G	4.7	F55	0.20	14	BMV-500ADA4R7MF55G	

() : Second standard

Alchip™ - **MVK-BP** Series

- Bi-polarized chip type for the circuit, of which polarity is frequently reversed
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

MVK-BP

↑
Bi-polarized
MVK




◆ **SPECIFICATIONS**

Items	Characteristics						
Category	-40 to +105°C						
Temperature Range	-40 to +105°C						
Rated Voltage Range	6.3 to 50V _{dc}						
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)						
Leakage Current	I = 0.05CV or 10μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)						
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V
	tanδ (Max.)	0.35	0.26	0.24	0.20	0.18	0.18
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2
	Z(-40°C)/Z(+20°C)	10	8	6	4	3	3
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 1,000 hours at 105°C, however the polarization shall be reversed every 250 hours.						
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied.						
	Capacitance change	≤±25% of the initial value					
	D.F. (tanδ)	≤200% of the initial specified value					
	Leakage current	≤The initial specified value					


◆ **DIMENSIONS [mm]**

● Terminal Code : A

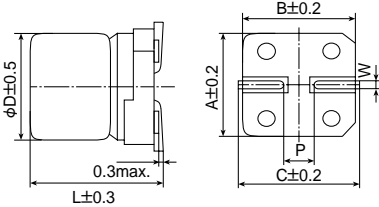

Size code	D	L	A	B	C	W	P
D60	4	5.7	4.3	4.3	5.1	0.5 to 0.8	1.0
E60	5	5.7	5.3	5.3	5.9	0.5 to 0.8	1.4
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9

◆ **PART NUMBERING SYSTEM**

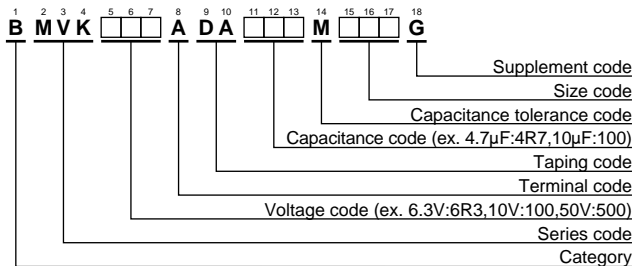

Please refer to "A guide to global code (surface mount type)"

◆ **MARKING**

EX) 35V4.7μF



◆ **STANDARD RATINGS**

WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{RMS} /105°C, 120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{RMS} /105°C, 120Hz)	Part No.
6.3	10	D60	0.35	14	BMVK6R3ADA100MD60G	50	0.10	D60	0.18	1.3	BMVK500ADAR10MD60G
	22	E60	0.35	25	BMVK6R3ADA220ME60G		(0.15)	(D60)	(0.18)	(1.9)	BMVK500ADAR15MD60G
	47	F60	0.35	39	BMVK6R3ADA470MF60G		0.22	D60	0.18	2.3	BMVK500ADAR22MD60G
10	(6.8)	(D60)	(0.26)	(13)	BMVK100ADA6R8MD60G		0.33	D60	0.18	2.8	BMVK500ADAR33MD60G
	(15)	(E60)	(0.26)	(22)	BMVK100ADA150ME60G		0.47	D60	0.18	3.4	BMVK500ADAR47MD60G
	33	F60	0.26	35	BMVK100ADA330MF60G		(0.68)	(D60)	(0.18)	(4.1)	BMVK500ADAR68MD60G
16	4.7	D60	0.24	12	BMVK160ADA4R7MD60G		1.0	D60	0.18	5.5	BMVK500ADA1R0MD60G
	10	E60	0.24	20	BMVK160ADA100ME60G		(1.5)	(D60)	(0.18)	(7.5)	BMVK500ADA1R5MD60G
	22	F60	0.24	32	BMVK160ADA220MF60G		2.2	E60	0.18	10	BMVK500ADA2R2ME60G
25	3.3	D60	0.20	10	BMVK250ADA3R3MD60G		3.3	E60	0.18	13	BMVK500ADA3R3ME60G
	(6.8)	(E60)	(0.20)	(17)	BMVK250ADA6R8ME60G		4.7	F60	0.18	16	BMVK500ADA4R7MF60G
	(15)	(F60)	(0.20)	(28)	BMVK250ADA150MF60G		(6.8)	(F60)	(0.18)	(20)	BMVK500ADA6R8MF60G
35	2.2	D60	0.18	8.8	BMVK350ADA2R2MD60G						
	4.7	E60	0.18	15	BMVK350ADA4R7ME60G						
	10	F60	0.18	23	BMVK350ADA100MF60G						

() : Second standard

Appendix (Global code)

◆Capacitance code

* How to use the table

	1st
2nd	Cap. Value

Capacitance value part

2nd	1st								
	1	2	3	4	5	6	7	8	9
0	10.0	20.0	30.0	40.0	50.0	60.0	70.0	80.0	90.0
A	10.5	20.5	30.5	40.5	50.5	60.5	70.5	80.5	90.5
1	11.0	21.0	31.0	41.0	51.0	61.0	71.0	81.0	91.0
B	11.5	21.5	31.5	41.5	51.5	61.5	71.5	81.5	91.5
2	12.0	22.0	32.0	42.0	52.0	62.0	72.0	82.0	92.0
C	12.5	22.5	32.5	42.5	52.5	62.5	72.5	82.5	92.5
3	13.0	23.0	33.0	43.0	53.0	63.0	73.0	83.0	93.0
D	13.5	23.5	33.5	43.5	53.5	63.5	73.5	83.5	93.5
4	14.0	24.0	34.0	44.0	54.0	64.0	74.0	84.0	94.0
E	14.5	24.5	34.5	44.5	54.5	64.5	74.5	84.5	94.5
5	15.0	25.0	35.0	45.0	55.0	65.0	75.0	85.0	95.0
F	15.5	25.5	35.5	45.5	55.5	65.5	75.5	85.5	95.5
6	16.0	26.0	36.0	46.0	56.0	66.0	76.0	86.0	96.0
G	16.5	26.5	36.5	46.5	56.5	66.5	76.5	86.5	96.5
7	17.0	27.0	37.0	47.0	57.0	67.0	77.0	87.0	97.0
H	17.5	27.5	37.5	47.5	57.5	67.5	77.5	87.5	97.5
8	18.0	28.0	38.0	48.0	58.0	68.0	78.0	88.0	98.0
J	18.5	28.5	38.5	48.5	58.5	68.5	78.5	88.5	98.5
9	19.0	29.0	39.0	49.0	59.0	69.0	79.0	89.0	99.0
K	19.5	29.5	39.5	49.5	59.5	69.5	79.5	89.5	99.5

For less than 10 μ F, a decimal point position is displayed with R.

For 10 μ F or more, capacitance code is set to the first 2 digits and index (1 digit).

Treatment of fraction (Refer to the table)

Example of conversion

Real cap.	The first 2 digits	Treatment of fraction	Code		
			11th	12th	13th
10.0 μ F →	10.0 →	10.0 →	1	0	0
10.1 μ F →	10.1 →	10.0 →	1	0	0
10.2 μ F →	10.2 →	10.0 →	1	0	0
10.3 μ F →	10.3 →	10.5 →	1	A	0
10.4 μ F →	10.4 →	10.5 →	1	A	0
10.5 μ F →	10.5 →	10.5 →	1	A	0
10.6 μ F →	10.6 →	10.5 →	1	A	0
10.7 μ F →	10.7 →	10.5 →	1	A	0
10.8 μ F →	10.8 →	11.0 →	1	1	0
10.9 μ F →	10.9 →	11.0 →	1	1	0
11.0 μ F →	11.0 →	11.0 →	1	1	0
132 μ F →	13.2 →	13.0 →	1	3	1
133 μ F →	13.3 →	13.5 →	1	D	1
167 μ F →	16.7 →	16.5 →	1	G	1
168 μ F →	16.8 →	17.0 →	1	7	1
1110 μ F →	11.1 →	11.0 →	1	1	2
1340 μ F →	13.4 →	13.5 →	1	D	2
13200 μ F →	13.2 →	13.0 →	1	3	3
13600 μ F →	13.6 →	13.5 →	1	D	3
270000 μ F →	27.0 →	27.0 →	2	7	4

◆Case length (Radial lead type)

Case length [mm]	16th	17th
0.0	—	—
0.1	0	B
0.2	0	C
0.3	0	D
0.4	0	E
0.5	0	F
0.6	0	G
0.7	0	H
0.8	0	J
0.9	0	K

Case length [mm]	16th	17th
1.0	0	1
1.1	1	B
1.2	1	C
1.3	1	D
1.4	1	E
1.5	1	F
1.6	1	G
1.7	1	H
1.8	1	J
1.9	1	K

Case length [mm]	16th	17th
2.0	0	2
2.1	2	B
2.2	2	C
2.3	2	D
2.4	2	E
2.5	2	F
2.6	2	G
2.7	2	H
2.8	2	J
2.9	2	K

Case length [mm]	16th	17th
3.0	0	3
3.1	3	B
3.2	3	C
3.3	3	D
3.4	3	E
3.5	3	F
3.6	3	G
3.7	3	H
3.8	3	J
3.9	3	K

Case length [mm]	16th	17th
4.0	0	4
4.1	4	B
4.2	4	C
4.3	4	D
4.4	4	E
4.5	4	F
4.6	4	G
4.7	4	H
4.8	4	J
4.9	4	K

Case length [mm]	16th	17th
5.0	0	5
5.1	5	B
5.2	5	C
5.3	5	D
5.4	5	E
5.5	5	F
5.6	5	G
5.7	5	H
5.8	5	J
5.9	5	K

Case length [mm]	16th	17th
6.0	0	6
6.1	6	B
6.2	6	C
6.3	6	D
6.4	6	E
6.5	6	F
6.6	6	G
6.7	6	H
6.8	6	J
6.9	6	K

Case length [mm]	16th	17th
7.0	0	7
7.1	7	B
7.2	7	C
7.3	7	D
7.4	7	E
7.5	7	F
7.6	7	G
7.7	7	H
7.8	7	J
7.9	7	K

Case length [mm]	16th	17th
8.0	0	8
8.1	8	B
8.2	8	C
8.3	8	D
8.4	8	E
8.5	8	F
8.6	8	G
8.7	8	H
8.8	8	J
8.9	8	K

Case length [mm]	16th	17th
9.0	0	9
9.1	9	B
9.2	9	C
9.3	9	D
9.4	9	E
9.5	9	F
9.6	9	G
9.7	9	H
9.8	9	J
9.9	9	K

Case length [mm]	16th	17th
10.0	1	0
10.1	A	1
10.2	A	2
10.3	A	3
10.4	A	4
10.5	A	5
10.6	A	6
10.7	A	7
10.8	A	8
10.9	A	9

Case length [mm]	16th	17th
11.0	1	1
11.1	B	1
11.2	B	2
11.3	B	3
11.4	B	4
11.5	B	5
11.6	B	6
11.7	B	7
11.8	B	8
11.9	B	9

Case length [mm]	16th	17th
12.0	1	2
12.1	C	1
12.2	C	2
12.3	C	3
12.4	C	4
12.5	C	5
12.6	C	6
12.7	C	7
12.8	C	8
12.9	C	9

Case length [mm]	16th	17th
13.0	1	3
13.1	D	1
13.2	D	2
13.3	D	3
13.4	D	4
13.5	D	5
13.6	D	6
13.7	D	7
13.8	D	8
13.9	D	9

Case length [mm]	16th	17th
14.0	1	4
14.1	E	1
14.2	E	2
14.3	E	3
14.4	E	4
14.5	E	5
14.6	E	6
14.7	E	7
14.8	E	8
14.9	E	9



PART NUMBERING SYSTEM

Case length [mm]	16th	17th
15.0	1	5
15.1	F	1
15.2	F	2
15.3	F	3
15.4	F	4
15.5	F	5
15.6	F	6
15.7	F	7
15.8	F	8
15.9	F	9

Case length [mm]	16th	17th
16.0	1	6
16.1	G	1
16.2	G	2
16.3	G	3
16.4	G	4
16.5	G	5
16.6	G	6
16.7	G	7
16.8	G	8
16.9	G	9

Case length [mm]	16th	17th
17.0	1	7
17.1	H	1
17.2	H	2
17.3	H	3
17.4	H	4
17.5	H	5
17.6	H	6
17.7	H	7
17.8	H	8
17.9	H	9

Case length [mm]	16th	17th
18.0	1	8
18.1	J	1
18.2	J	2
18.3	J	3
18.4	J	4
18.5	J	5
18.6	J	6
18.7	J	7
18.8	J	8
18.9	J	9

Case length [mm]	16th	17th
19.0	1	9
19.1	K	1
19.2	K	2
19.3	K	3
19.4	K	4
19.5	K	5
19.6	K	6
19.7	K	7
19.8	K	8
19.9	K	9

Case length [mm]	16th	17th
20.0	2	0
20.5	L	1
21.0	2	1
21.5	L	3
22.0	2	2
22.5	L	5
23.0	2	3
23.5	L	7
24.0	2	4
24.5	L	9
25.0	2	5
25.5	M	1
26.0	2	6
26.5	M	3
27.0	2	7
27.5	M	5
28.0	2	8
28.5	M	7
29.0	2	9
29.5	M	9

Case length [mm]	16th	17th
30.0	3	0
30.5	N	1
31.0	3	1
31.5	N	3
32.0	3	2
32.5	N	5
33.0	3	3
33.5	N	7
34.0	3	4
34.5	N	9
35.0	3	5
35.5	P	1
36.0	3	6
36.5	P	3
37.0	3	7
37.5	P	5
38.0	3	8
38.5	P	7
39.0	3	9
39.5	P	9

Case length [mm]	16th	17th
40.0	4	0
40.5	Q	1
41.0	4	1
41.5	Q	3
42.0	4	2
42.5	Q	5
43.0	4	3
43.5	Q	7
44.0	4	4
44.5	Q	9
45.0	4	5
45.5	R	1
46.0	4	6
46.5	R	3
47.0	4	7
47.5	R	5
48.0	4	8
48.5	R	7
49.0	4	9
49.5	R	9

Case length [mm]	16th	17th
50.0	5	0
50.5	S	1
51.0	5	1
51.5	S	3
52.0	5	2
52.5	S	5
53.0	5	3
53.5	S	7
54.0	5	4
54.5	S	9
55.0	5	5
55.5	T	1
56.0	5	6
56.5	T	3
57.0	5	7
57.5	T	5
58.0	5	8
58.5	T	7
59.0	5	9
59.5	T	9

Case length [mm]	16th	17th
60.0	6	0
60.5	U	1
61.0	6	1
61.5	U	3
62.0	6	2
62.5	U	5
63.0	6	3
63.5	U	7
64.0	6	4
64.5	U	9
65.0	6	5
65.5	V	1
66.0	6	6
66.5	V	3
67.0	6	7
67.5	V	5
68.0	6	8
68.5	V	7
69.0	6	9
69.5	V	9

Case length [mm]	16th	17th
70.0	7	0
70.5	W	1
71.0	7	1
71.5	W	3
72.0	7	2
72.5	W	5
73.0	7	3
73.5	W	7
74.0	7	4
74.5	W	9
75.0	7	5
75.5	X	1
76.0	7	6
76.5	X	3
77.0	7	7
77.5	X	5
78.0	7	8
78.5	X	7
79.0	7	9
79.5	X	9

Case length [mm]	16th	17th
80.0	8	0
80.5	Y	1
81.0	8	1
81.5	Y	3
82.0	8	2
82.5	Y	5
83.0	8	3
83.5	Y	7
84.0	8	4
84.5	Y	9
85.0	8	5
85.5	Z	1
86.0	8	6
86.5	Z	3
87.0	8	7
87.5	Z	5
88.0	8	8
88.5	Z	7
89.0	8	9
89.5	Z	9

◆Case length (Snap-in type / Screw mount terminal type)

Case length [mm]	16th	17th
20	2	0
21	2	1
22	2	2
23	2	3
24	2	4
25	2	5
26	2	6
27	2	7
28	2	8
29	2	9

Case length [mm]	16th	17th
30	3	0
31	3	1
32	3	2
33	3	3
34	3	4
35	3	5
36	3	6
37	3	7
38	3	8
39	3	9

Case length [mm]	16th	17th
40	4	0
41	4	1
42	4	2
43	4	3
44	4	4
45	4	5
46	4	6
47	4	7
48	4	8
49	4	9

Case length [mm]	16th	17th
50	5	0
51	5	1
52	5	2
53	5	3
54	5	4
55	5	5
56	5	6
57	5	7
58	5	8
59	5	9

Case length [mm]	16th	17th
60	6	0
61	6	1
62	6	2
63	6	3
64	6	4
65	6	5
66	6	6
67	6	7
68	6	8
69	6	9

Case length [mm]	16th	17th
70	7	0
71	7	1
72	7	2
73	7	3
74	7	4
75	7	5
76	7	6
77	7	7
78	7	8
79	7	9

Case length [mm]	16th	17th
80	8	0
81	8	1
82	8	2
83	8	3
84	8	4
85	8	5
86	8	6
87	8	7
88	8	8
89	8	9

Case length [mm]	16th	17th
90	9	0
91	9	1
92	9	2
93	9	3
94	9	4
95	9	5
96	9	6
97	9	7
98	9	8
99	9	9

Case length [mm]	16th	17th
100	A	0
101	A	1
102	A	2
103	A	3
104	A	4
105	A	5
106	A	6
107	A	7
108	A	8
109	A	9

Case length [mm]	16th	17th
110	B	0
111	B	1
112	B	2
113	B	3
114	B	4
115	B	5
116	B	6
117	B	7
118	B	8
119	B	9

Case length [mm]	16th	17th
120	C	0
121	C	1
122	C	2
123	C	3
124	C	4
125	C	5
126	C	6
127	C	7
128	C	8
129	C	9

Case length [mm]	16th	17th
130	D	0
131	D	1
132	D	2
133	D	3
134	D	4
135	D	5
136	D	6
137	D	7
138	D	8
139	D	9

Case length [mm]	16th	17th
140	E	0
141	E	1
142	E	2
143	E	3
144	E	4
145	E	5
146	E	6
147	E	7
148	E	8
149	E	9

Case length [mm]	16th	17th
150	F	0
151	F	1
152	F	2
153	F	3
154	F	4
155	F	5
156	F	6
157	F	7
158	F	8
159	F	9

Case length [mm]	16th	17th
160	G	0
161	G	1
162	G	2
163	G	3
164	G	4
165	G	5
166	G	6
167	G	7
168	G	8
169	G	9

Case length [mm]	16th	17th
170	H	0
171	H	1
172	H	2
173	H	3
174	H	4
175	H	5
176	H	6
177	H	7
178	H	8
179	H	9

Case length [mm]	16th	17th
180	J	0
181	J	1
182	J	2
183	J	3
184	J	4
185	J	5
186	J	6
187	J	7
188	J	8
189	J	9

Case length [mm]	16th	17th
190	K	0
191	K	1
192	K	2
193	K	3
194	K	4
195	K	5
196	K	6
197	K	7
198	K	8
199	K	9

Case length [mm]	16th	17th
200	L	0
201	L	1
202	L	2
203	L	3
204	L	4
205	L	5
206	L	6
207	L	7
208	L	8
209	L	9

Case length [mm]	16th	17th
210	M	0
211	M	1
212	M	2
213	M	3
214	M	4
215	M	5
216	M	6
217	M	7
218	M	8
219	M	9

Case length [mm]	16th	17th
220	N	0
221	N	1
222	N	2
223	N	3
224	N	4
225	N	5
226	N	6
227	N	7
228	N	8
229	N	9

Case length [mm]	16th	17th
230	P	0
231	P	1
232	P	2
233	P	3
234	P	4
235	P	5
236	P	6
237	P	7
238	P	8
239	P	9

Case length [mm]	16th	17th
240	Q	0
241	Q	1
242	Q	2
243	Q	3
244	Q	4
245	Q	5
246	Q	6
247	Q	7
248	Q	8
249	Q	9

Case length [mm]	16th	17th
250	R	0
251	R	1
252	R	2
253	R	3
254	R	4
255	R	5
256	R	6
257	R	7
258	R	8
259	R	9

◆ Supplement code

Surface mount type / Conductive polymer (Include Radial lead type)

	Terminal plating material (Radial lead type)		
	Sn100%	Sn-Bi	Sn-Pb
Coating case	S	G	N

Radial lead type / Snap-in type

		Terminal plating material (Radial lead type)		
		Sn100%	Sn-Bi	Sn-Pb
Outer sleeve	PET	S	D	C
	Coating case	H	G	F
	Polyolefin	L	—	—
	Pb-free PVC	M	—	N
	PVC	B	A	N

* Pb-free snap-in type does not have top disk.

We also produce Pb-free snap-in type with "Top disk, Pb-free PVC sleeve and Sn100% terminal plating".

In this case, supplement code (the 18th digit) becomes "T".

Screw mount terminal type

	Screw terminal
Pb-free PVC	M
Polyolefin	S
PET	C
PVC	N