

SMQ Series

- Downsized from current standard SMG series
- Endurance : 85°C 2000 hours
- Non Solvent-proof type
- Pb-free design

SMQ

↑ downsized
SMG





◆ SPECIFICATIONS

Items	Characteristics																
Category Temperature Range	-40 to +85°C(6.3 to 400V _{dc}) -25 to +85°C(450V _{dc})																
Rated Voltage Range	6.3 to 450V _{dc}																
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)																
Leakage Current	6.3 to 100V _{dc}												160 to 450V _{dc}				
	≤φ18	I=0.03CV or 4μA, whichever is greater.											CV \ Time After 1 minute				
												CV≤1000 I=0.1CV+40 max.	CV>1000 I=0.04CV+100 max.				
											(at 20C after 1 minute)	(at 20°C)					
≥φ20	I=0.03CV												(at 20°C after 3 minutes)				
Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)																	
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	315 to 400V	450V					
	tanδ (Max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.09	0.08	0.20	0.24	0.24					
When nominal capacitance exceeds 1000μF, add 0.02 to the value above for each 1000μF increase. (at 20°C, 120Hz)																	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 200V	250V	350V	400V	450V			
	Z(-25°C)/Z(+20°C)	≤φ8	5	4	3	2	2	2	2	2	3	3	4	4	6		
		≥φ10	5	4	3	2	2	2	2	2	3	3	4	4	6		
	Z(-40°C)/Z(+20°C)	≤φ8	12	10	8	5	4	3	3	3	8	10	8	8	—		
	≥φ10	12	10	8	5	4	3	3	3	4	4	6	6	—	(at 120Hz)		
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C.																
	Capacitance change	≤±20% of the initial value															
	D.F. (tanδ)	≤200% of the initial specified value															
	Leakage current	≤The initial specified value															
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours at 85°C without voltage applied.																
	Rated voltage	6.3 to 100V _{dc}						160 to 450V _{dc}									
	Capacitance change	≤±20% of the initial value						≤±20% of the initial value									
	D.F. (tanδ)	≤200% of the initial specified value						≤200% of the initial specified value									
	Leakage current	≤The initial specified value						≤500% of the initial specified value									


◆ DIMENSIONS [mm]

- Terminal Code : E

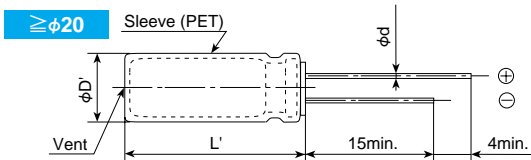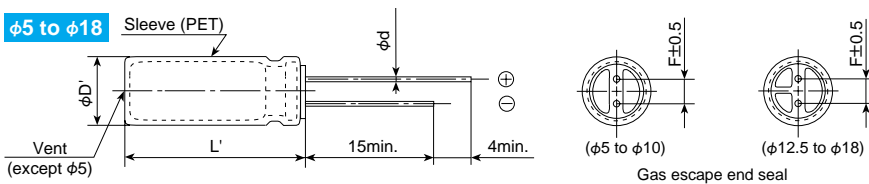

φD	5	6.3	8	10	12.5	16	18	20	22
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0	1.0
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0
φD'	φD+0.5max.							φD+0.5max.	
L'	L+1.5max.							L+2.0max.	

◆ PART NUMBERING SYSTEM

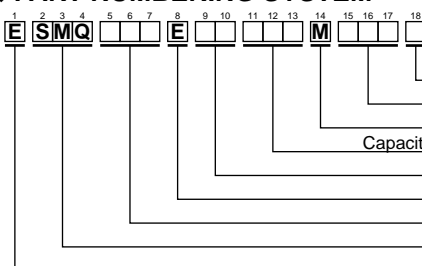

Please refer to "A guide to global code (radial lead type)"



◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mArms/85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mArms/85°C,120Hz)	Part No.
6.3	1000	8×11.5	0.28	540	ESMQ6R3E□□102MHB5D	50	47	6.3×11	0.12	155	ESMQ500E□□470MF11D
	2200	10×16	0.30	890	ESMQ6R3E□□222MJ16S		68	6.3×11	0.12	210	ESMQ500E□□680MF11D
	3300	10×20	0.32	1190	ESMQ6R3E□□332MJ20S		100	8×11.5	0.12	260	ESMQ500E□□101MHB5D
	4700	12.5×20	0.34	1550	ESMQ6R3E□□472MK20S		220	10×12.5	0.12	430	ESMQ500E□□221MJ20S
	6800	12.5×25	0.38	1920	ESMQ6R3E□□682MK25S		330	10×16	0.12	590	ESMQ500E□□331MJ16S
	10000	16×25	0.46	2350	ESMQ6R3E□□103ML25S		470	10×20	0.12	760	ESMQ500E□□471MJ20S
	15000	16×31.5	0.56	2550	ESMQ6R3E□□153MLN3S		1000	12.5×25	0.12	1350	ESMQ500E□□102MK25S
	22000	18×35.5	0.70	3200	ESMQ6R3E□□223MMP1S		2200	16×31.5	0.14	1980	ESMQ500E□□222MLN3S
	33000	20×40	0.92	3500	ESMQ6R3E□□333MN40S		3300	18×35.5	0.16	2500	ESMQ500E□□332MMP1S
	47000	22×50	1.20	3900	ESMQ6R3E□□473MP50S		4700	20×40	0.18	2900	ESMQ500E□□472MN40S
10	220	5×11	0.24	240	ESMQ100E□□221ME11D	6800	22×50	0.22	3500	ESMQ500E□□682MP50S	
	330	6.3×11	0.24	290	ESMQ100E□□331MF11D	63	22	5×11	0.09	100	ESMQ630E□□220ME11D
	470	6.3×11	0.24	350	ESMQ100E□□471MF11D		33	6.3×11	0.09	140	ESMQ630E□□330MF11D
	1000	10×12.5	0.24	650	ESMQ100E□□102MJC5S		47	6.3×11	0.09	170	ESMQ630E□□470MF11D
	2200	10×16	0.26	990	ESMQ100E□□222MJ16S		68	8×11.5	0.09	220	ESMQ630E□□680MHB5D
	3300	12.5×20	0.28	1450	ESMQ100E□□332MK20S		100	8×11.5	0.09	280	ESMQ630E□□101MHB5D
	4700	12.5×25	0.30	1800	ESMQ100E□□472MK25S		220	10×16	0.09	490	ESMQ630E□□221MJ16S
	6800	16×25	0.34	2250	ESMQ100E□□682ML25S		330	10×20	0.09	710	ESMQ630E□□331MJ20S
	10000	16×31.5	0.42	2550	ESMQ100E□□103MLN3S		470	12.5×20	0.09	900	ESMQ630E□□471MK20S
	15000	16×35.5	0.52	2880	ESMQ100E□□153MLP1S		1000	16×25	0.09	1300	ESMQ630E□□102ML25S
22000	18×40	0.66	3400	ESMQ100E□□223MMP40S	2200		18×35.5	0.11	2300	ESMQ630E□□222MMP1S	
33000	22×50	0.88	4500	ESMQ100E□□333MP50S	3300	20×40	0.13	2700	ESMQ630E□□332MN40S		
16	220	6.3×11	0.20	260	ESMQ160E□□221MF11D	4700	22×50	0.15	3400	ESMQ630E□□472MP50S	
	330	6.3×11	0.20	320	ESMQ160E□□331MF11D	100	0.10	5×11	0.08	2.1	ESMQ101E□□R10ME11D
	470	8×11.5	0.20	440	ESMQ160E□□471MHB5D		0.22	5×11	0.08	4.7	ESMQ101E□□R22ME11D
	1000	10×12.5	0.20	700	ESMQ160E□□102MJC5S		0.33	5×11	0.08	7.0	ESMQ101E□□R33ME11D
	2200	10×20	0.22	1000	ESMQ160E□□222MJ20S		0.47	5×11	0.08	10	ESMQ101E□□R47ME11D
	3300	12.5×25	0.24	1700	ESMQ160E□□332MK25S		1.0	5×11	0.08	21	ESMQ101E□□R10ME11D
	4700	16×25	0.26	2100	ESMQ160E□□472ML25S		2.2	5×11	0.08	30	ESMQ101E□□R22ME11D
	6800	16×25	0.30	2250	ESMQ160E□□682ML25S		3.3	5×11	0.08	40	ESMQ101E□□R33ME11D
	10000	16×35.5	0.38	2710	ESMQ160E□□103MLP1S		4.7	5×11	0.08	45	ESMQ101E□□R47ME11D
	15000	18×40	0.48	3100	ESMQ160E□□153MM40S		10	5×11	0.08	70	ESMQ101E□□R100ME11D
22000	22×40	0.62	3800	ESMQ160E□□223MP40S	22		6.3×11	0.08	130	ESMQ101E□□R220MF11D	
25	100	5×11	0.16	180	ESMQ250E□□101ME11D	33	8×11.5	0.08	180	ESMQ101E□□R330MHB5D	
	220	6.3×11	0.16	280	ESMQ250E□□221MF11D	47	8×11.5	0.08	200	ESMQ101E□□R470MHB5D	
	330	8×11.5	0.16	440	ESMQ250E□□331MHB5D	68	10×12.5	0.08	270	ESMQ101E□□680MJC5S	
	470	10×12.5	0.16	550	ESMQ250E□□471MJC5S	100	10×16	0.08	340	ESMQ101E□□101MJ16S	
	1000	10×16	0.16	860	ESMQ250E□□102MJ16S	220	12.5×20	0.08	550	ESMQ101E□□221MK20S	
	2200	12.5×25	0.18	1550	ESMQ250E□□222MK25S	330	12.5×25	0.08	760	ESMQ101E□□331MK25S	
	3300	16×25	0.20	1980	ESMQ250E□□332ML25S	470	16×25	0.08	1000	ESMQ101E□□471ML25S	
	4700	16×25	0.22	2200	ESMQ250E□□472ML25S	1000	18×35.5	0.08	1350	ESMQ101E□□102MMP1S	
	6800	16×35.5	0.26	2600	ESMQ250E□□682MLP1S	2200	22×50	0.08	2400	ESMQ101E□□222MP50S	
	10000	18×40	0.34	2800	ESMQ250E□□103MM40S	160	10	8×11.5	0.20	80	ESMQ161E□□100MHB5D
15000	22×50	0.44	3800	ESMQ250E□□153MP50S	22		10×12.5	0.20	130	ESMQ161E□□220MJC5S	
35	47	5×11	0.14	130	ESMQ350E□□470ME11D		33	10×16	0.20	180	ESMQ161E□□330MJ16S
	68	6.3×11	0.14	160	ESMQ350E□□680MF11D		47	10×20	0.20	210	ESMQ161E□□470MJ20S
	100	6.3×11	0.14	210	ESMQ350E□□101MF11D		68	12.5×20	0.20	350	ESMQ161E□□680MK20S
	220	8×11.5	0.14	385	ESMQ350E□□221MHB5D		100	12.5×25	0.20	430	ESMQ161E□□101MK25S
	330	10×12.5	0.14	490	ESMQ350E□□331MJC5S		220	16×31.5	0.20	760	ESMQ161E□□221MLN3S
	470	10×16	0.14	650	ESMQ350E□□471MJ16S		330	18×35.5	0.20	995	ESMQ161E□□331MMP1S
	1000	12.5×20	0.14	1150	ESMQ350E□□102MK20S		470	18×40	0.20	1200	ESMQ161E□□471MM40S
	2200	16×25	0.16	1800	ESMQ350E□□222ML25S		200	1.0	6.3×11	0.20	22
	3300	16×31.5	0.18	2100	ESMQ350E□□332MLN3S	2.2		6.3×11	0.20	33	ESMQ201E□□R22MF11D
	4700	16×35.5	0.20	2500	ESMQ350E□□472MLP1S	3.3		6.3×11	0.20	40	ESMQ201E□□R33MF11D
6800	18×40	0.24	2800	ESMQ350E□□682MM40S	4.7	6.3×11		0.20	50	ESMQ201E□□R47MF11D	
10000	22×50	0.32	3700	ESMQ350E□□103MP50S	10	8×11.5		0.20	80	ESMQ201E□□R100MHB5D	
50	0.10	5×11	0.12	1.3	ESMQ500E□□R10ME11D	22		10×16	0.20	150	ESMQ201E□□R220MJ16S
	0.22	5×11	0.12	2.9	ESMQ500E□□R22ME11D	33		10×20	0.20	205	ESMQ201E□□R330MJ20S
	0.33	5×11	0.12	4.3	ESMQ500E□□R33ME11D	47		12.5×20	0.20	270	ESMQ201E□□R470MK20S
	0.47	5×11	0.12	6.2	ESMQ500E□□R47ME11D	68		12.5×25	0.20	350	ESMQ201E□□R680MK25S
	1.0	5×11	0.12	17	ESMQ500E□□R10ME11D	100		16×25	0.20	475	ESMQ201E□□R101ML25S
	2.2	5×11	0.12	28	ESMQ500E□□R22ME11D	220	16×35.5	0.20	700	ESMQ201E□□R221MLP1S	
	3.3	5×11	0.12	35	ESMQ500E□□R33ME11D	330	18×40	0.20	950	ESMQ201E□□R331MM40S	
	4.7	5×11	0.12	41	ESMQ500E□□R47ME11D	250	3.3	6.3×11	0.20	40	ESMQ251E□□R33MF11D
	10	5×11	0.12	60	ESMQ500E□□R100ME11D		4.7	6.3×11	0.20	50	ESMQ251E□□R47MF11D
	22	5×11	0.12	95	ESMQ500E□□R220ME11D		10	10×12.5	0.20	100	ESMQ251E□□R100MJ20S
33	5×11	0.12	125	ESMQ500E□□R330ME11D	22		10×20	0.20	170	ESMQ251E□□R220MJ20S	

□ : Lead forming / Taping code

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mA _{rms} /85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mA _{rms} /85°C,120Hz)	Part No.	
250	33	10×20	0.20	200	ESMQ251E□□330MJ20S	400	3.3	8×11.5	0.24	48	ESMQ401E□□3R3MHB5D	
	47	12.5×20	0.20	270	ESMQ251E□□470MK20S		4.7	10×12.5	0.24	60	ESMQ401E□□4R7MJC5S	
	68	16×25	0.20	380	ESMQ251E□□680ML25S		10	10×16	0.24	90	ESMQ401E□□100MJ16S	
	100	16×25	0.20	440	ESMQ251E□□101ML25S		22	12.5×25	0.24	205	ESMQ401E□□220MK25S	
	220	18×35.5	0.20	680	ESMQ251E□□221MMP1S		33	16×25	0.24	275	ESMQ401E□□330ML25S	
350	2.2	6.3×11	0.24	30	ESMQ351E□□2R2MF11D	400	47	16×25	0.24	280	ESMQ401E□□470ML25S	
	3.3	8×11.5	0.24	46	ESMQ351E□□3R3MHB5D		68	16×31.5	0.24	340	ESMQ401E□□680MLN3S	
	4.7	8×11.5	0.24	55	ESMQ351E□□4R7MHB5D		100	18×35.5	0.24	440	ESMQ401E□□101MMP1S	
	10	10×12.5	0.24	90	ESMQ351E□□100MJC5S		450	2.2	8×11.5	0.24	28	ESMQ451E□□2R2MHB5D
	22	12.5×20	0.24	185	ESMQ351E□□220MK20S			3.3	10×12.5	0.24	40	ESMQ451E□□3R3MJC5S
	33	12.5×25	0.24	240	ESMQ351E□□330MK25S	4.7		10×12.5	0.24	46	ESMQ451E□□4R7MJC5S	
	47	16×25	0.24	325	ESMQ351E□□470ML25S	10		10×20	0.24	80	ESMQ451E□□100MJ20S	
	68	16×25	0.24	400	ESMQ351E□□680ML25S	22	12.5×25	0.24	140	ESMQ451E□□220MK25S		
	100	18×31.5	0.24	530	ESMQ351E□□101MMN3S	33	16×25	0.24	180	ESMQ451E□□330ML25S		
400	0.47	6.3×11	0.24	12	ESMQ401E□□47MF11D	47	16×31.5	0.24	220	ESMQ451E□□470MLN3S		
	1.0	6.3×11	0.24	22	ESMQ401E□□1R0MF11D	68	18×35.5	0.24	260	ESMQ451E□□680MMP1S		
	2.2	8×11.5	0.24	38	ESMQ401E□□2R2MHB5D	100	18×40	0.24	280	ESMQ451E□□101MM40S		

□□ : Lead forming / Taping code

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

(φ5 to φ18)

Capacitance (μF)	Frequency (Hz)					
	50	120	300	1k	10k	100k
0.1 to 4.7	0.65	1.00	1.35	1.75	2.30	2.50
10 to 68	0.75	1.00	1.25	1.50	1.75	1.80
100 to 1,000	0.80	1.00	1.15	1.30	1.40	1.50
2,200 to	0.85	1.00	1.03	1.05	1.08	1.08

(φ20 to φ22)

Rated Voltage (Vdc)	Frequency (Hz)					
	50	120	300	1k	10k	100k
6.3 to 50	0.95	1.00	1.03	1.05	1.08	1.08
63 to 100	0.92	1.00	1.07	1.13	1.19	1.20