


# SRM Series

- Downsized from current standard SRE series
- 5mm height, 1,000-hours-life at 85°C
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)
- Pb-free design ( $\phi 4$  to  $\phi 8$ )

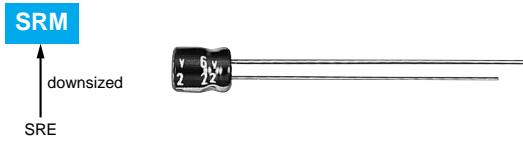


## ◆SPECIFICATIONS

Items	Characteristics						
Category Temperature Range	−40 to +85°C						
Rated Voltage Range	4 to 50V <sub>dc</sub>						
Capacitance Tolerance	$\pm 20\%$ (M) (at 20°C, 120Hz)						
Leakage Current	$I=0.01CV$ or $3\mu A$ , whichever is greater. Where, I : Max. leakage current ( $\mu A$ ), C : Nominal capacitance ( $\mu F$ ), V : Rated voltage (V) (at 20°C after 2 minutes)						
Dissipation Factor ( $\tan\delta$ )	Rated voltage (V <sub>dc</sub> )	4V	6.3V	10V	16V	25V	35V
	$\tan\delta$ (Max.)	0.40	0.38	0.30	0.23	0.17	0.15
	50V						
Low Temperature Characteristics (Max. Impedance Ratio)	Z( $-25^{\circ}C$ )/Z( $+20^{\circ}C$ )	7	4	3	2	2	2
	Z( $-40^{\circ}C$ )/Z( $+20^{\circ}C$ )	15	8	8	6	4	3
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 1,000 hours at 85°C.						
	Capacitance change	$\leq \pm 20\%$ of the initial value					
	D.F. ( $\tan\delta$ )	$\leq 200\%$ of the initial specified value					
	Leakage current	$\leq$ The initial specified value					
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.						
	Capacitance change	$\leq \pm 20\%$ of the initial value					
	D.F. ( $\tan\delta$ )	$\leq 200\%$ of the initial specified value					
	Leakage current	$\leq$ The initial specified value					

## ◆DIMENSIONS [mm]


- Terminal Code : E

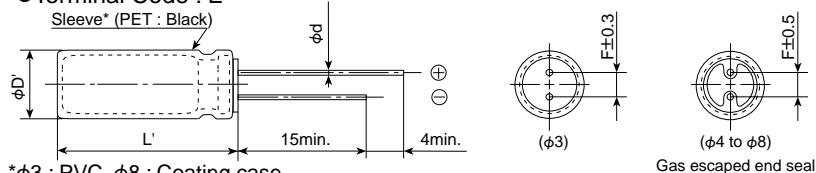

\* $\phi 3$  : PVC,  $\phi 8$  : Coating case

φD	3	4	5	6.3	8
φd	0.4	0.45	0.45	0.45	0.45
F	1.0	1.5	2.0	2.5	2.5
φD'	$\phi D+0.5\text{max.}$				
L'	$L+1.0\text{max.}$				

## ◆PART NUMBERING SYSTEM

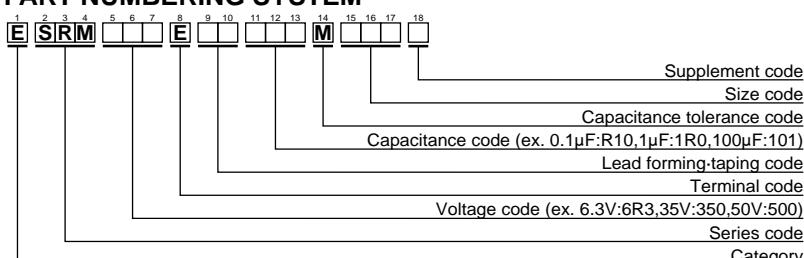

Please refer to "A guide to global code (radial lead type)"

## ◆STANDARD RATINGS

WV (V <sub>dc</sub> )	Cap ( $\mu F$ )	Case size $\phi DXL$ (mm)	$\tan\delta$	Rated ripple current (mA <sub>rms</sub> / 85°C, 120Hz)	Part No.
4	100	5×5	0.40	55	ESRM4R0E□□101ME05D
	220	6.3×5	0.40	88	ESRM4R0E□□221MF05D
6.3	22	3×5	0.38	22	ESRM6R3E□□220MB05N
	47	4×5	0.38	40	ESRM6R3E□□470MD05D
10	330	8×5	0.38	141	ESRM6R3E□□331MH05G
	33	4×5	0.30	36	ESRM100E□□330MD05D
	100	6.3×5	0.30	78	ESRM100E□□101MF05D
16	220	8×5	0.30	148	ESRM100E□□221MH05G
	10	3×5	0.23	18	ESRM160E□□100MB05N
	22	4×5	0.23	33	ESRM160E□□220MD05D
	33	5×5	0.23	47	ESRM160E□□330ME05D
25	47	5×5	0.23	55	ESRM160E□□470ME05D
	4.7	3×5	0.17	13	ESRM250E□□4R7MB05N
	10	4×5	0.17	25	ESRM250E□□100MD05D
	22	5×5	0.17	41	ESRM250E□□220ME05D
	47	6.3×5	0.17	63	ESRM250E□□470MF05D

□□ : Lead forming code and taping code

Note : The case size of  $\phi 3\times 5$  will be unified to  $\phi 4\times 5$ .

WV (V <sub>dc</sub> )	Cap ( $\mu F$ )	Case size $\phi DXL$ (mm)	$\tan\delta$	Rated ripple current (mA <sub>rms</sub> / 85°C, 120Hz)	Part No.
25	100	8×5	0.17	116	ESRM250E□□101MH05G
35	3.3	3×5	0.15	12	ESRM350E□□3R3MB05N
	33	6.3×5	0.15	56	ESRM350E□□330MF05D
	47	8×5	0.15	85	ESRM350E□□470MH05G
50	0.10	3×5	0.13	1.3	ESRM500E□□R10MB05N
	0.22	3×5	0.13	2.9	ESRM500E□□R22MB05N
	0.33	3×5	0.13	4.2	ESRM500E□□R33MB05N
	0.47	3×5	0.13	5.0	ESRM500E□□R47MB05N
	1.0	3×5	0.13	7.2	ESRM500E□□R10MB05N
	2.2	3×5	0.13	10	ESRM500E□□R22MB05N
	3.3	4×5	0.13	14	ESRM500E□□R33MB05D
	4.7	4×5	0.13	19	ESRM500E□□R47MD05D
	10	5×5	0.13	31	ESRM500E□□100ME05D
	22	6.3×5	0.13	49	ESRM500E□□220MF05D
	33	8×5	0.13	76	ESRM500E□□330MH05G