

H Series


High Energy, Low Varistor Voltage Series

Operating Temperature Range: -40 to +125°C
Storage Temperature Range: -50 to +150°C

◆STANDARD RATINGS

Part Number	Previous Part Number (Just for your reference)	Max. Allowable Voltage			Max. Energy 20ms(J)	Max. Clamping Voltage		Varistor Voltage V1mA (V)
		Continuous		5 minutes		(A)	(V)	
		AC (Vrms)	DC (V)	DC (V)				
TND09H-220KB00AAA0	TNR9H220K	12	16	24	5	2	43	22 (20~24)
TND09H-270KB00AAA0	TNR9H270K	15	19	29			53	27 (24~30)
TND09H-330KB00AAA0	TNR9H330K	18	24	36			65	33 (30~36)
TND09H-390KB00AAA0	TNR9H390K	22	28	42			77	39 (35~43)
TND09H-470KB00AAA0	TNR9H470K	26	34	50			93	47 (42~52)
TND12H-220KB00AAA0	TNR12H220K	12	16	24	10	5	43	22 (20~24)
TND12H-270KB00AAA0	TNR12H270K	15	19	29			53	27 (24~30)
TND12H-330KB00AAA0	TNR12H330K	18	24	36			65	33 (30~36)
TND12H-390KB00AAA0	TNR12H390K	22	28	42			77	39 (35~43)
TND12H-470KB00AAA0	TNR12H470K	26	34	50			93	47 (42~52)
TND15H-220KB00AAA0	TNR15H220K	12	16	24	20	10	43	22 (20~24)
TND15H-270KB00AAA0	TNR15H270K	15	19	29			53	27 (24~30)
TND15H-330KB00AAA0	TNR15H330K	18	24	36			65	33 (30~36)
TND15H-390KB00AAA0	TNR15H390K	22	28	42			77	39 (35~43)
TND15H-470KB00AAA0	TNR15H470K	26	34	50			93	47 (42~52)
TND23H-220KB00AAA0	TNR23H220K	12	16	24	40	25	43	22 (20~24)
TND23H-270KB00AAA0	TNR23H270K	15	19	29			53	27 (24~30)
TND23H-330KB00AAA0	TNR23H330K	18	24	36			65	33 (30~36)
TND23H-390KB00AAA0	TNR23H390K	22	28	42			77	39 (35~43)
TND23H-470KB00AAA0	TNR23H470K	26	34	50			93	47 (42~52)

◆DIMENSIONS [mm]







Type	D Max.	H Max.	W ±1.0	L Min.	φd
9H	10.0	14.0	5.0	25.0	0.6
12H	14.0	17.0	7.5	25.0	0.8
15H	17.0	20.0	7.5	25.0	0.8
23H	24.0	28.0	10.0	25.0	0.8

Type	T Max.
220K~330K	6.0
390K~470K	8.0

H Series

◆V-I CURVE

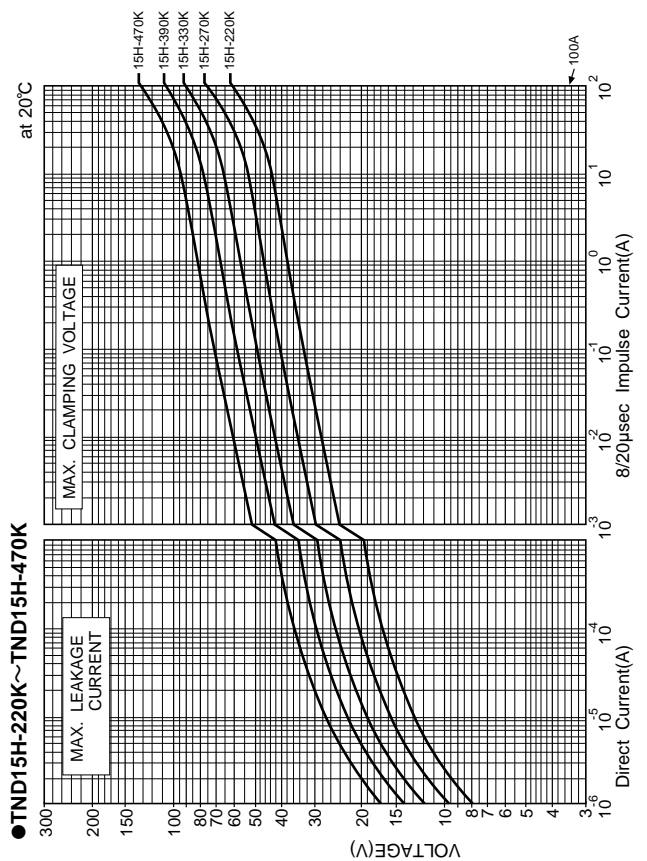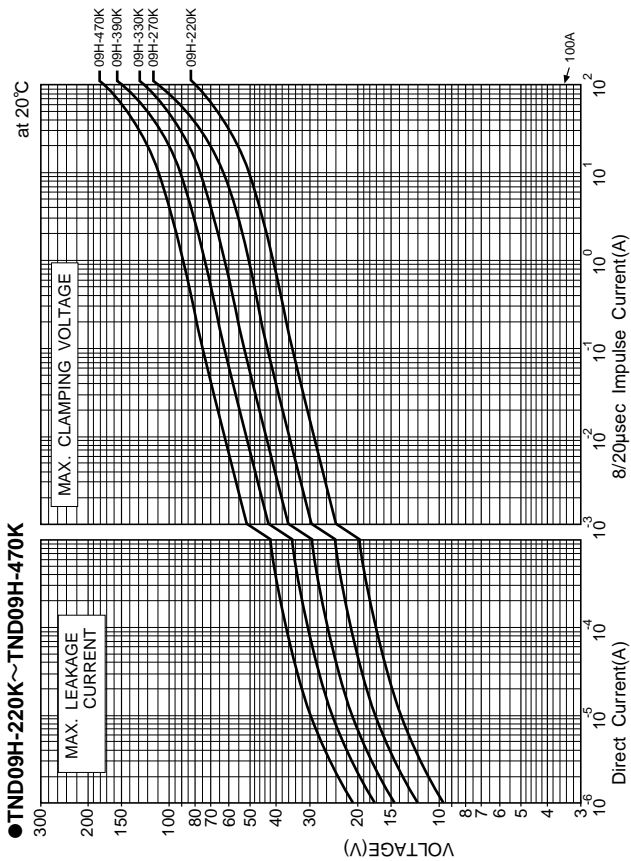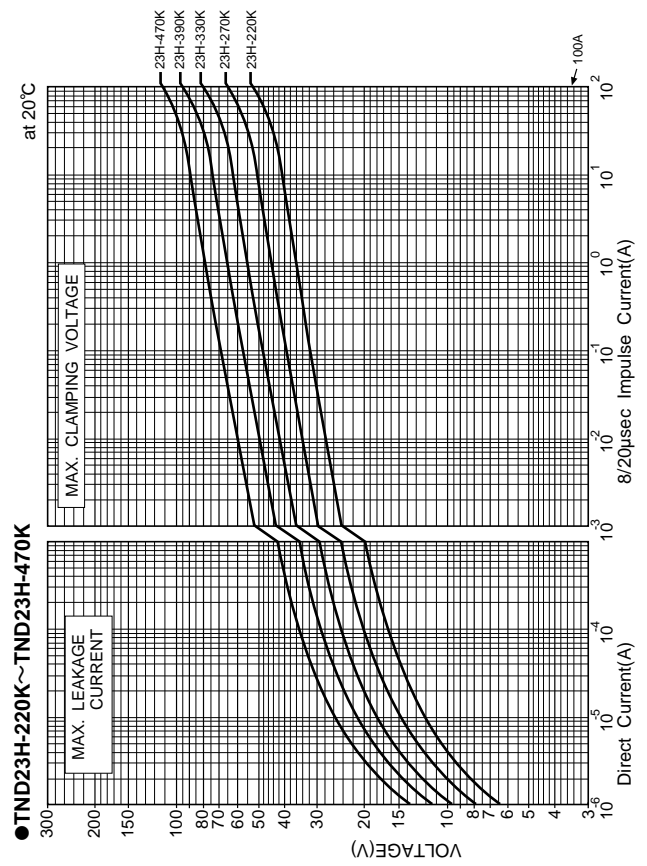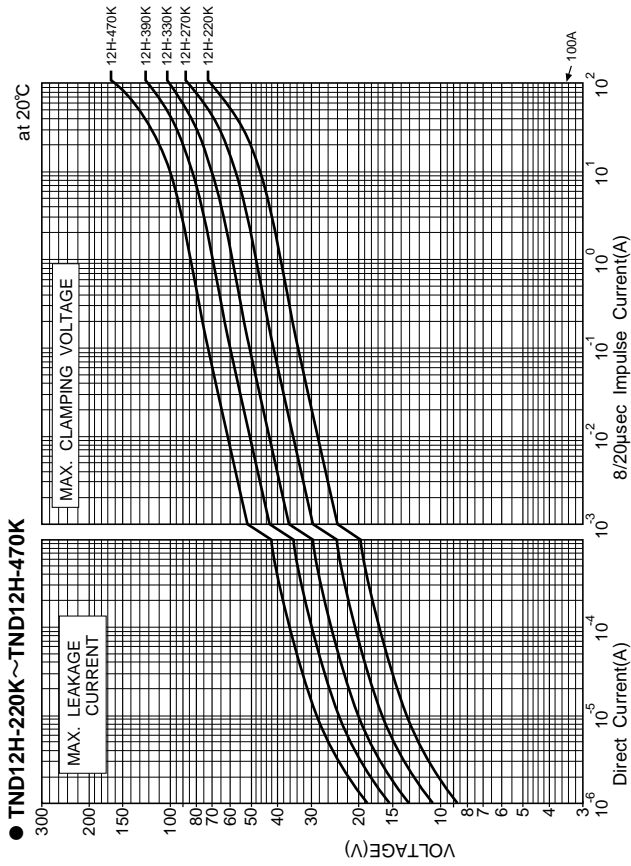



H Series

◆GENERAL SPECIFICATIONS

Operating Temperature Range: -40 to +125°C
Storage Temperature Range: -50 to +150°C

Item	Test Conditions	Specifications
Standard Test Condition	Ambient temperature : 20±15°C Relative humidity : 65±20% RH if there is any doubt about the results, measurement shall be made within the following limits. Ambient temperature : 20±5°C Relative humidity : 65±20% RH	
Varistor Voltage	The voltage between the two terminals measured at 1mA DC is called Varistor Voltage. The measurement shall be made as fast as possible to avoid heat effecton.	Satisfy the specification.
Maximum Allowable Voltage	Maximum continuous sinusoidal RMS voltage or Maximum continuous DC voltage which may be applied.	Refer to RATINGS.
Maximum applicable voltage for a short period (5 minutes)	Maximum DC voltage to be applied for only 5 minutes.	Refer to RATINGS.
Maximum Clamping Voltage	The maximum voltage between the terminals, measured standard impluse current (8/20 μs).	Satisfy the specification.
Maximum Energy	Maximum energy within the ±10% varistor voltage change when 1 impulse 20 msec long is applied.	Satisfy the specification.
Temperature Coefficient	$\frac{V_{1mA \text{ at } 85^\circ\text{C}} - V_{1mA \text{ at } 25^\circ\text{C}}}{V_{1mA \text{ at } 25^\circ\text{C}}} \times \frac{1}{60} \times 100 (\%/^\circ\text{C})$	Within ±0.05% / °C

◆MECHANICAL CHARACTERISTICS

Item	Test Conditions	Specifications
Terminal Pull Strength	After gradually applying the force keeping the unit fixed for 10±1 second in axial direction, the damage of the terminals shall be visually examined. $\frac{\text{Lead diameter}}{\phi 0.6\text{mm. } \phi 0.8\text{mm}} \quad \frac{\text{Force}}{10 \text{ N}}$	No remarkable damage
Terminal Bending Strength	The unit shall be secured with its terminal kept vertical and the weight specified below be applied in the axial direction. The terminal shall gradually be bend by 90° in one direction then 90° in the opposite direction, and again back to original position. The damage of the terminal shall be visually examined. $\frac{\text{Lead diameter}}{\phi 0.6\text{mm. } \phi 0.8\text{mm}} \quad \frac{\text{Force}}{5 \text{ N}}$	No remarkable damage
Vibration	After repeatedly applying a single harmonic vibration (amplitude : 0.75mm) double amplitude : 1.5mm with 1 minute vibration frequency cycle (10Hz→500Hz→10Hz) to each three perpendicular directions for 2 hours. Total 6 hours. The devices shall be visually examined.	No remarkable damage
Solderability	Dipping the terminal to a Rosin depth for 5 to 10 seconds. After dipping the terminal to a depth of 2.0 to 2.5mm from the body in a soldering bath of 230±5°C for 5±0.5 seconds, the terminal shall be visually examined.	75% of the terminals should be covered with solder uniformly.
Resistance to Soldering Heat	The terminal shall be dipped into a soldering bath of 350±10°C to a depth of 2.0 to 2.5mm from the body and be held there for 3± $\frac{1}{2}$ seconds. or The terminal shall be dipped into a soldering bath of 260±5°C to a depth of 2.0 to 2.5mm from the body and be held there for 10±1 seconds.	$\Delta V_{1mA} \leq \pm 5\%$ No outstanding damage



H Series

◆ENVIRONMENTAL CHARACTERISTICS

Item	Test Conditions	Specifications
High Temperature Storage (Dry heat)	The specimen shall be subjected 150±2°C for 1000±12 hours without load.	$\Delta V 1mA \leq \pm 10\%$
Damp heat (Humidity)	The specimen shall be subjected to 60±2°C, 90 to 95%RH for 1000±12 hours without load.	$\Delta V 1mA \leq \pm 10\%$
Temperature Cycle	The temperature cycle shown below shall be repeated 50 cycles. -40C±3°C, 30 minutes ↔ +150°C±2°C, 30 minutes	$\Delta V 1mA \leq \pm 10\%$ No remarkable damage
High Temperature Operating	The specimen shall be subjected to 125±2°C with the maximum allowable voltage for 1000±12 hours.	$\Delta V 1mA \leq \pm 20\%$
Damp heat Operating	The specimen shall be subjected to 60±2°C, 90 to 95%RH with the maximum allowable voltage for 1000±12 hours.	$\Delta V 1mA \leq \pm 10\%$

Varistor voltage change of forward direction shall be measured in the test of unipole surge life and DC load life.

Varistor voltage change is measured after stored at Standard Test Conditions for 1 to 2 hours.

Note : For 42V battery line, please contact our sales office.