





Relative Humidity Sensor

【Humidity Sensors】

Model No. HIS-06-N

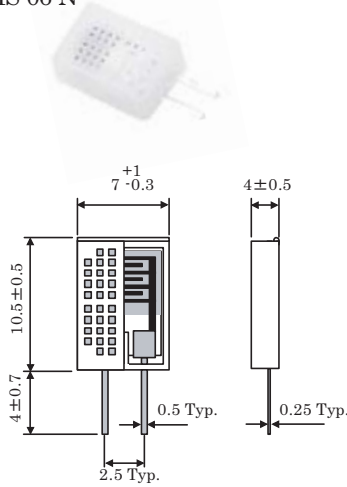


Model No. HIS-07-N

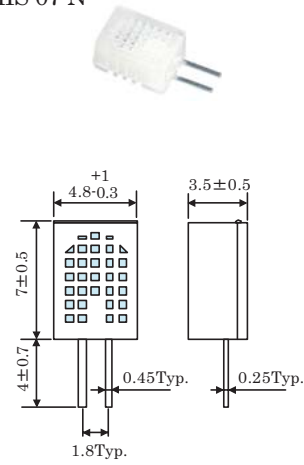


Item		HIS-06-N	HIS-07-N
Absolute Maximum Ratings	Rated Voltage	AC 5.5V Max.	
	Rated Wattage	1.0mW	0.5mW
	Storage Temperature Range	-25°C ~ 70°C	
	Storage Humidity Range	0%RH ~ 90%RH	
Operating Conditions	Operating Temperature Range	-20°C ~ 60°C	
	Operating Humidity Range	0%RH ~ 90%RH	
Electrical Performances	Output	45.8k Ω (at: 25°C/50%RH)	
	Output Accuracy	±5%RH (at: 25°C/50%RH)	
	Hysteresis	±1%RH (at: 30%RH ~ 90%RH)	
	Response	3.5minutes (Typ.) (at: 30%RH ⇄ 90%RH, 90% Reach, 1.2cm/sec.)	

【Humidity Sensor Modules】


Model No. HSU-04A1-N

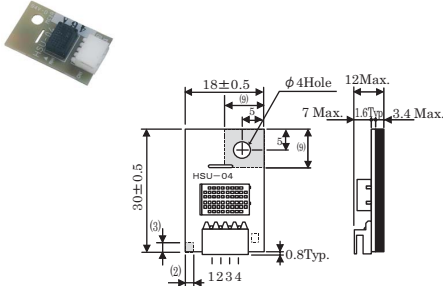


Model No. HSU-07A1-N/A2-N

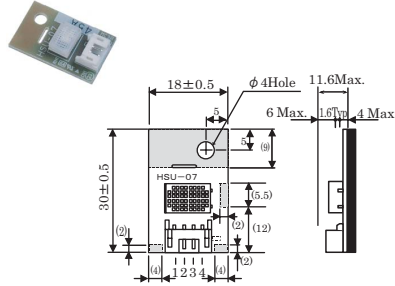


Model No. HSU-07B1-N/B2-N

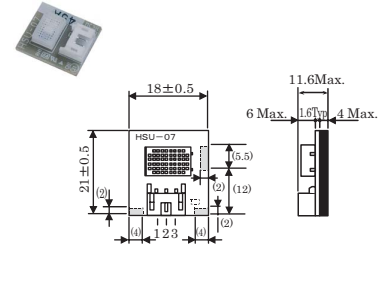

Model No. HSU-07F1V1-N

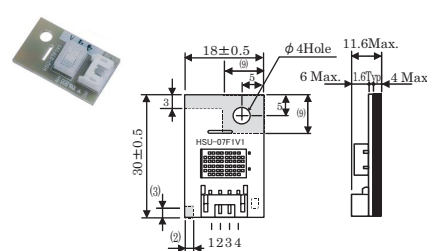

Model No. HSU-07D-N

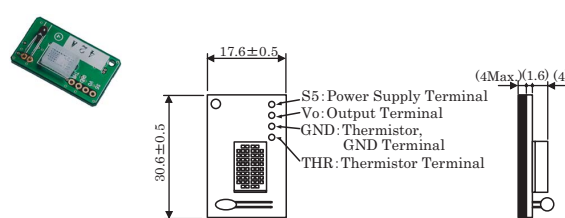

Item		HSU-04A1-N	HSU-07A1-N/A2-N	HSU-07B1-N/B2-N	HSU-07F1V1-N	HSU-07D-N
Absolute Maximum Ratings	Rated Voltage	DC 5.0V (4.75V ~ 5.25V)				
	Storage Temperature Range	-25°C ~ 70°C				
	Storage Humidity Range	0%RH ~ 90%RH				
Operating Conditions	Operating Temperature Range	-20°C ~ 60°C				
	Operating Humidity Range	10%RH ~ 90%RH	20%RH ~ 90%RH		10%RH ~ 90%RH	
Electrical Performances	Output Accuracy	±5%RH at 25°C: 40%RH/60%RH				
	Current Consumption	1.3mA Typ.			2mA Typ.	
	Hysteresis	±1%RH (at: 30%RH ~ 90%RH)				
	Thermistor Characteristics	R25=50k Ω ± 5%, B25/50=4000K ± 200K				R25=1.7k Ω ± 2%, B25/50=3900K ± 195K
Response		3.5 minutes (Typ.) (at: 30%RH ⇄ 90%RH, 90% Reach, 1.2cm/sec.)				