

REED SWITCH

ORD234

Long Life (More than 100 million operations)


GENERAL DESCRIPTION

The ORD234 is a single-contact reed switch designed for long life for increased number of operations. The contacts are sealed within the glass tube with inert gas to maintain contact reliability.

Features

- (1) Reed contacts are hermetically sealed within a glass tube with inert gas and do not receive any influence from the external atmospheric environment.
- (2) Quick response
- (3) The structure comprises an operating system and electrical circuits coaxially. Reed switches are suited to applications in radio frequency.
- (4) Reed switches are compact and light weight.
- (5) Superior corrosion resistance and wear resistance of the contacts assures stable switching operation and long life.
- (6) With a permanent magnet installed, reed switches economically and easily become proximity switches.

External Dimensions (Unit:mm)

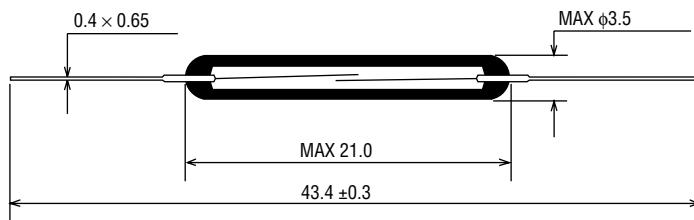


APPLICATIONS OF REED SWITCHES

1. Automotive electronic devices
2. Control equipment
3. Communication equipment
4. Measurement equipment
5. Household appliances


ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Condition	Rated Value			Unit
			Min.	Typ.	Max.	
Pull-in Value	PI	—	15	—	50	AT
Drop-out Value	DO	—	6	—	—	AT
Contact Resistance	CR	—	—	—	100	mΩ
Breakdown Voltage	—	PI>20	250	—	—	VDC
Breakdown Voltage	—	PI<20	200	—	—	VDC
Insulation Resistance	—	—	10^{10}	—	—	Ω
Electrostatic Capacitance	—	—	—	—	0.5	pF
Contact Rating	—	—	—	—	10	VA
Maximum Switching Voltage	—	—	—	—	200 DC	V
Maximum Switching Voltage	—	—	—	—	100 AC	V
Maximum Switching Current	—	—	—	—	0.5	A
Maximum Carry Current	—	—	—	—	2.0	A


(1) Drop-out vs. Pull-in

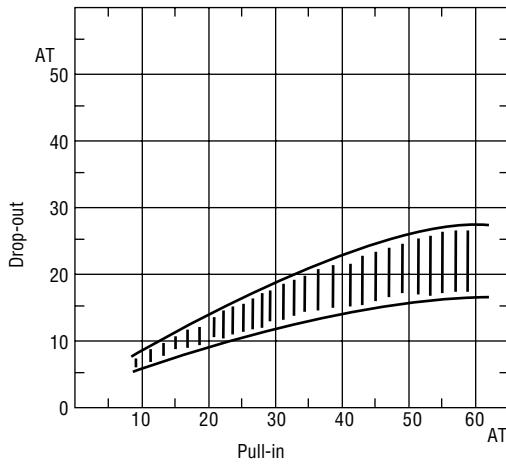


(2) Contact resistance

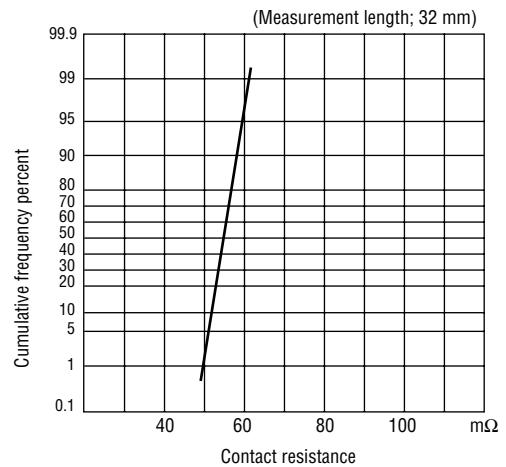


(3) Breakdown voltage

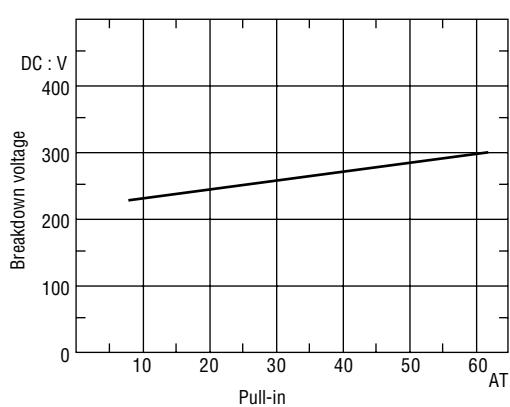

(4) Insulation resistance

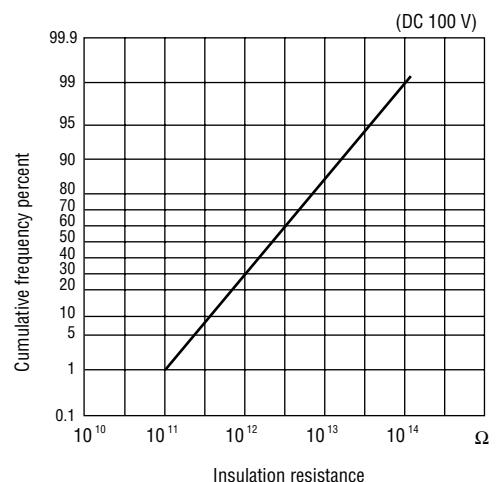


(5) Electrostatic capacitance

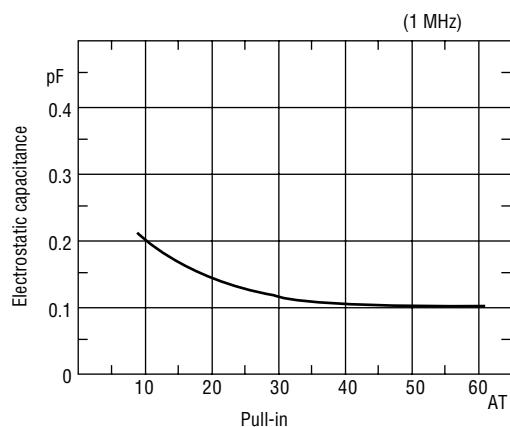


OPERATING CHARACTERISTICS

Parameter	Rated Value			Unit
	Min.	Typ.	Max.	
Operate Time	—	—	0.5	ms
Bounce Time	—	—	0.5	ms
Release Time	—	—	0.05	ms
Resonant Frequency	1900	2200	2500	Hz
Maximum Operating Frequency	—	—	500	Hz


(1) Operate time

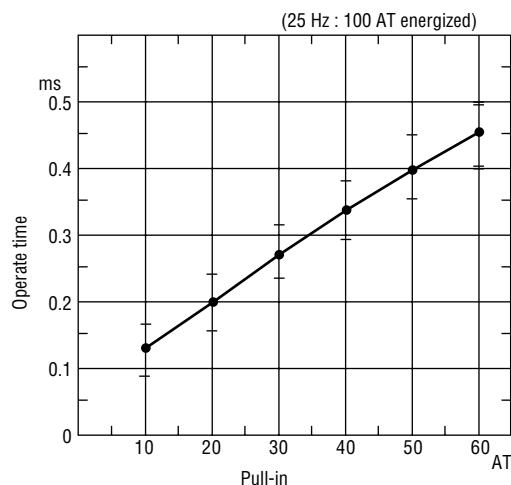


(2) Bounce time

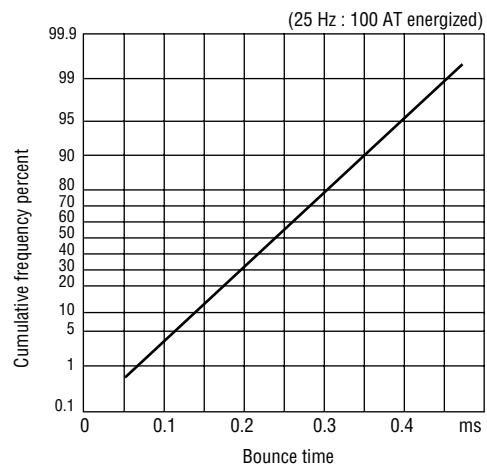

(3) Release time

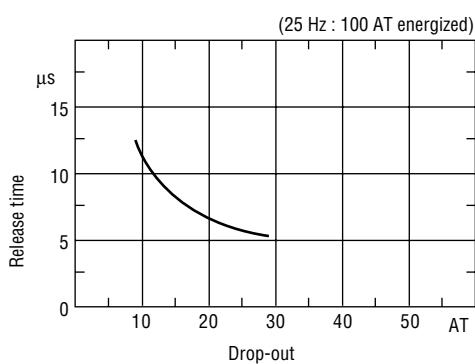


(4) Resonant frequency

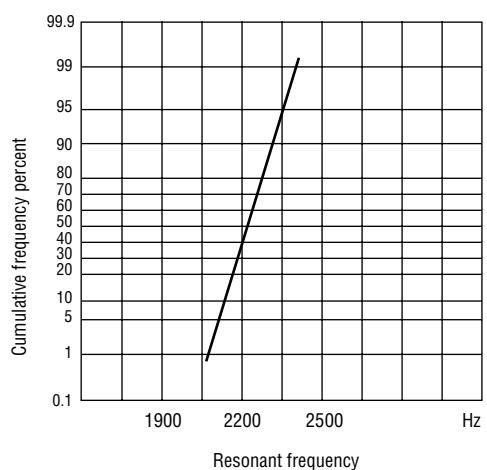


MECHANICAL CHARACTERISTICS

(1) Lead tensile test (static load)

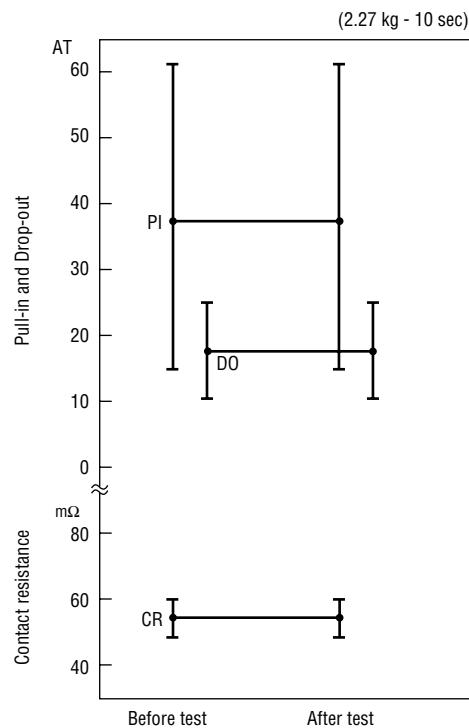


(2) Lead tensile strength

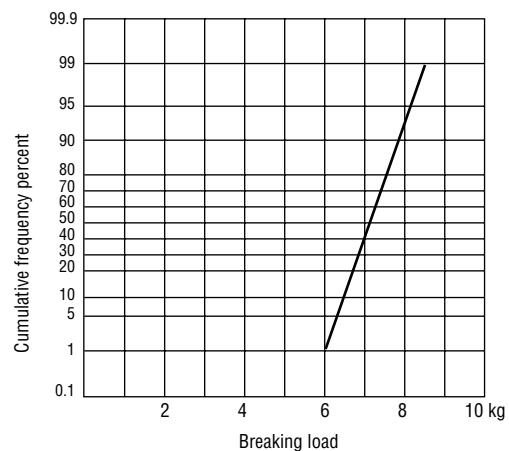


ENVIRONMENTAL CHARACTERISTICS


(1) Temperature characteristics

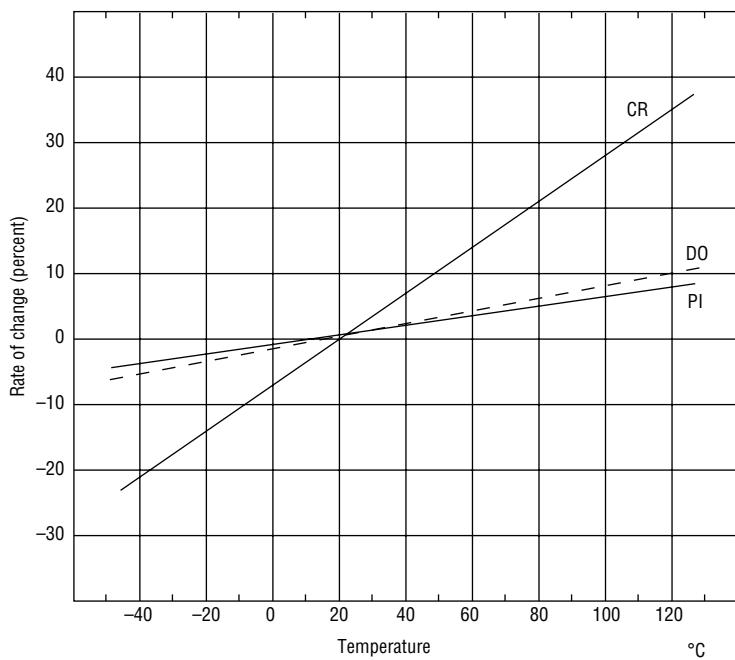


(2) Temperature cycle

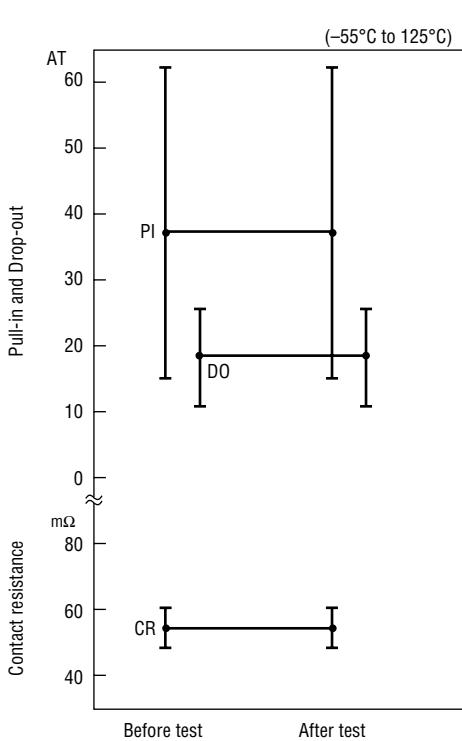


(3) Temperature and humidity cycle

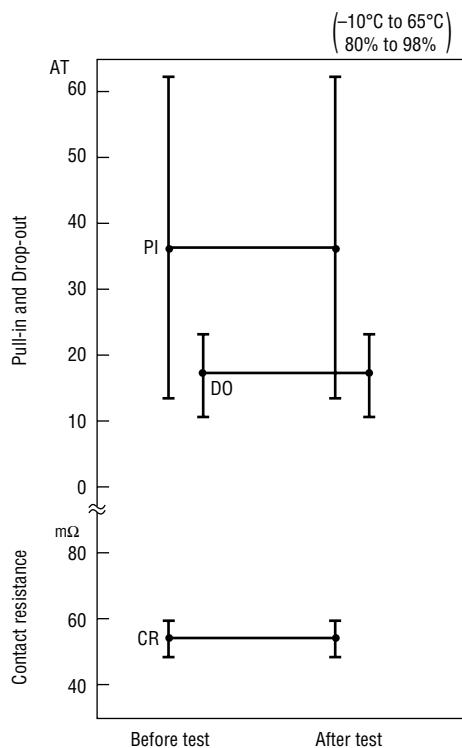


(4) High temperature storage test

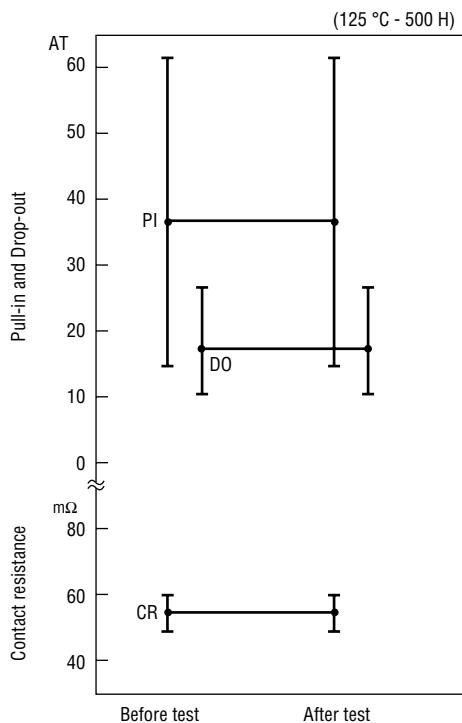


(5) Low temperature storage test

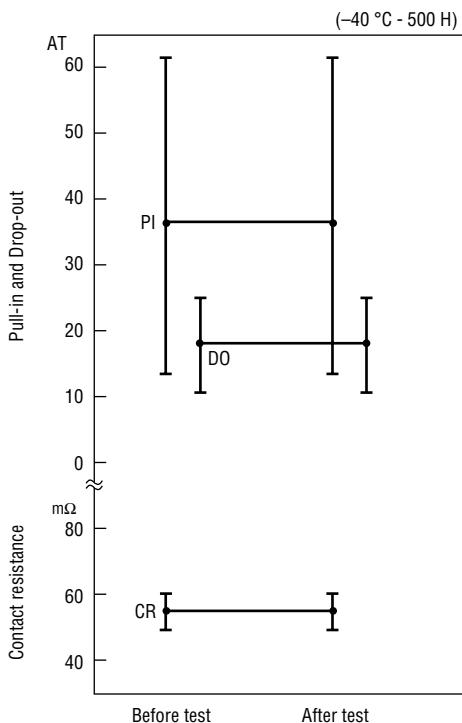

(6) Shock test

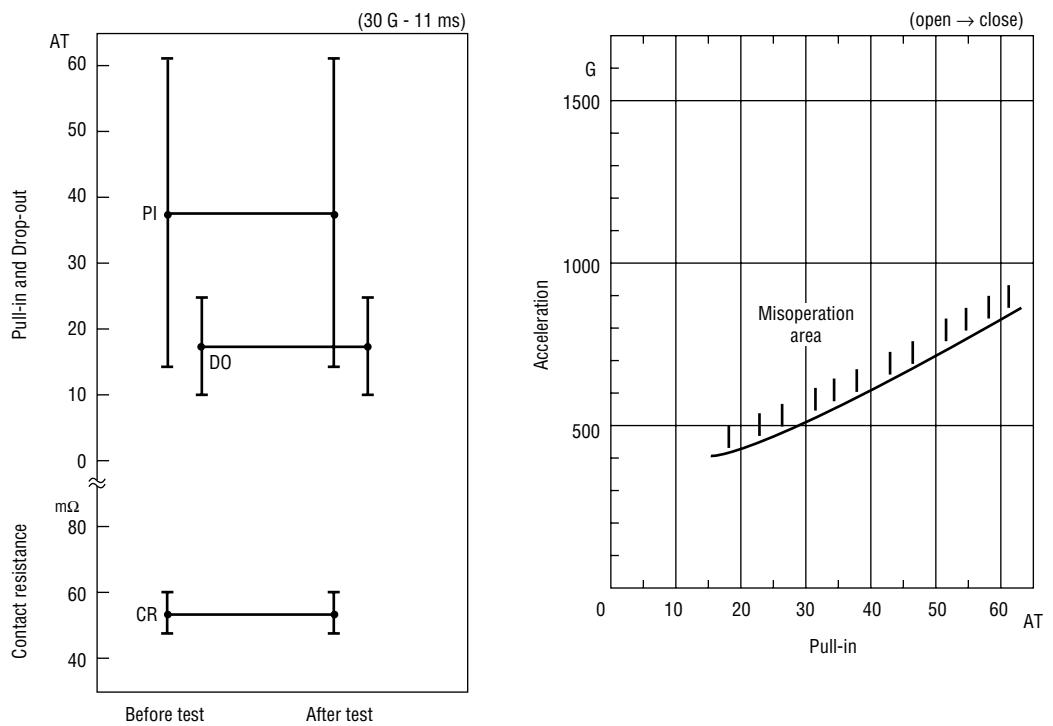


(7) Vibration test

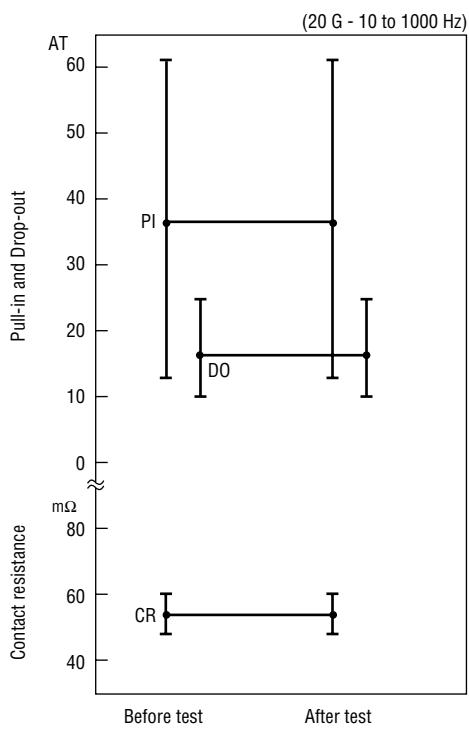

LIFE EXPECTANCY DATA: ORD234


Load conditions

Voltage : 5 VDC
Current: 100 µA, 1 mA, 5 mA
Load : Resistive load

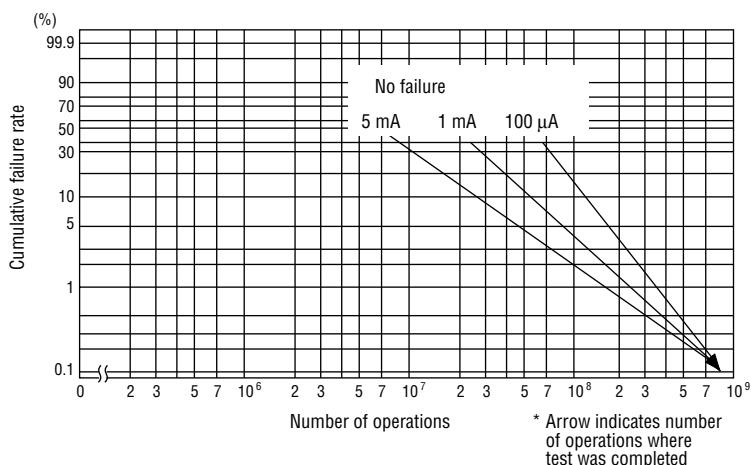

Load conditions

Voltage : 6 VDC, 7 VDC
Current: 10 mA, 20 mA, 2.2 mA
Load : Resistive load

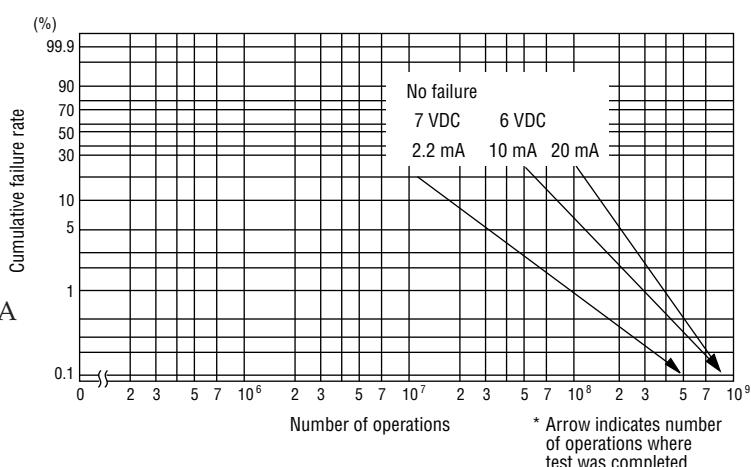

Load conditions

Voltage : 12 VDC, 24 VDC, 48 VDC
Current: 10 mA, 250 mA, 400 mA
Load : Resistive load

